



PRODUCT CATALOG

HIGH QUALITY LUBRICANTS.

www.meguin.de



Meguin – Quality lubricants made in Germany.

The roots of Meguin – Mineraloelwerke stretch back into 1847. Lubricants for carriages, grease for horse hooves and linseed oils were in great demand as the pace of industrialization in Germany increased. It was a demand that back then the company's founder, Gustav Meguin, was well able to satisfy. This profound understanding of the needs of customers remains one of the pillars of our success.

Collaboration with our many distributors over many years has brought our extensive product range and premium made in Germany quality to the attention of customers in industry and SMEs. And we are continuing to invest in the development and growth of our company: After extending our tank storage capacity to 18 million liters, the capacity of our raw material and recipe tanks was increased by 28 tanks to our current complement of 140 storage tanks. A state-of-the-art matrix distributor provides for a significantly more efficient material flow, while pigging technology delivers increased flexibility. The biggest and most recent new project is the expansion in production capacity: Innovative technology provides for optimized operational processes and supports filling operations that cover a range of 250 ml small containers right through to 205 l large containers.

All new product developments are created in our own laboratory with state-of-the-art equipment. It is where we implement a regular regime of inspection of the quality of our products. Responsibility for our company, people and environment have always been firm and fundamental values that here at Meguin we live out on a daily basis. For this reason, our corporate management is certified for quality (ISO 9001), environment (ISO 14001) and occupational health & safety (ISO 45001). It all adds up to making us one of the world's leading system suppliers for mineral oil products and lubricants – and a reliable partner for you!

Engine oils	Page	4
– Passenger cars		
– Truck		
– Mixed fleet		
– Single-grade oil		
– Motorcycle/motorboat		
Gear oils	16	
Agricultural machines	23	
Slideway oils CGLP	27	
Gear oils	28	
Hydraulic oils	30	
Machine oils	34	
Compressor oils	35	
Turbine oils	36	
Chain saw oils	36	
Formwork release oils	38	
Asphalt and concrete release agent	38	
Hardening oils	39	
White oils	39	
Rust proving oils	39	
Corrosion protection oils	40	
Transformer oils	40	
Steam cylinder oil	40	
Gas engine oils	40	
Heat transfer oils	41	
Water-immiscible cooling lubricants	42	
Greases	43	
Pastes	48	
Additives	49	
Service products	52	
Accessories	53	
Advertising material	54	

Passenger Cars
SAE 0W-16

1 l	12	33055 ¹³
4 l	4	33056 ¹³
5 l	4	33057 ¹³


megol Special Engine Oil SAE 0W-16

Modern high-performance motor oil. Thanks to the selected HC base oils in combination with the perfectly tuned additives, it has optimum properties specially formulated for gasoline engines on the Asian and American markets. Keeps the engine clean, offers high shear stability and minimizes wear. Ensures quick oil penetration as well as smooth engine running under all operating conditions and is therefore very well suited to the high demands of modern engines. Enables the reduction of fuel consumption due to the low viscosity class SAE 0W-16. The manufacturer's instructions and specifications must be followed before use!

SAE 0W-20

1 l	12	33026 ¹⁴
5 l	4	33058 ¹⁴
60 l	1	33027 ¹⁵
200 l	1	33059 ¹⁵


megol Motorenoel Evolution LL IV SAE 0W-20

High-performance low-friction motor oil based on state-of-the-art synthetic technology. The Longlife IV lubricant optimizes fuel consumption and achieves an additional fuel savings of around 1.5% compared to Longlife III, which was already optimized in terms of consumption. The decreased viscosity in combination with our tailored additive package ensures excellent cold-start behavior, increases the efficiency of the engine and also ensures optimum wear protection and outstanding engine cleanliness. Ideally suited for extended oil change intervals (WIV, etc.) and extreme demands on the engine. Specially developed for the requirements of various vehicle models from Audi, Seat, Skoda, Porsche and VW. Also suitable for vehicles with start-stop system. Range of applications: Passenger cars Follow the manufacturer's instructions!

1 l	12	7078 ⁸
5 l	4	6851 ⁸
20 l	1	33043 ¹⁵
200 l	1	33044 ¹⁵


megol Special Engine Oil SAE 0W-20

Modern high-performance motor oil. Thanks to the selected HC base oils in combination with the perfectly tuned additives, it has optimum properties specially formulated for gasoline engines on the Asian and American markets. Keeps the engine clean, offers high shear stability and minimizes wear. Ensures quick oil penetration as well as smooth engine running under all operating conditions and is therefore very well suited to the high demands of modern engines. The manufacturer's instructions and specifications must be followed before use!

SAE 0W-30

1 l	12	6323 ¹²
5 l	4	6322 ¹⁴
20 l	1	6365 ¹⁵
60 l	1	6850 ¹⁵


megol Motorenoel WIV 50601 SAE 0W-30 (vollsynthetisch)

Modern fully synthetic long-life engine oil that has been specially developed for all VW Group petrol and diesel engines from model year 2000 with extended servicing interval (WIV) including pump jet diesel engines.

5 l	4	6301 ¹⁴
-----	---	--------------------


megol Motorenoel Super Leichtlauf Multisynth SAE 0W-30

Modern, fully synthetic, fuel economy motoroil for year round use. The combination of unconventional synthetic base oils with the most advanced additive technology guarantees a low viscosity, highly shear resistant motor oil which reliably prevents deposits, reduce engine friction, and provides optimum protection against wear. This lowers fuel consumption while prolonging the life of the engine.

1 l	12	33038 ¹³
5 l	4	33039 ¹³
200 l	1	9038 ¹⁵


megol Motorenoel Fuel Eco 1 SAE 0W-30

High-grade engine oil based on modern synthesis technology with the latest additive technology. megol Motorenoel Fuel Eco 1 SAE 0W-30 is a lowviscosity, highly shear-resistant engine oil with reduced HTHS value. This leads to savings in fuel consumption while at the same time extending the life of the engine.

Passenger Cars

SAE 0W-30



megol Motorenoel New Engine FED SAE 0W-30

High-performance motor oil based on modern Low-SAPS additive technology and synthetic base oils. Specially developed for the requirements of the latest Euro 6 diesel engines from Ford. Ensures the best possible engine cleaning, prevents premature clogging of the diesel particulate filter, reduces emissions and protects the environment. Selected wear protection additives guarantee minimum friction with the highest fuel savings. Also suitable for vehicles with start-stop system.

Contents PU Part-No.

1 l	12	33015	¹⁴
5 l	4	33030	¹⁴
20 l	1	33012	¹⁵
60 l	1	33013	¹⁵
200 l	1	33014	¹⁵



megol Motorenoel Future LL 12FE SAE 0W-30

The latest base oils, combined with an innovative, perfectly tuned additive package. Guarantees outstanding performance, excellent protection and cleanliness of the engine as well as reduced friction and optimum temperature stability. Has a considerably smaller proportion of ash-forming substances and thus protects the diesel particulate filter from dirt and damage. Enables highly efficient driving with the greatest fuel savings at a low oil consumption and maximum engine performance. Supports a long engine service life. Specially developed for the requirements of various vehicle models from BMW. Also suitable for start-stop system. Range of applications: Passenger cars Follow the manufacturer's instructions!

1 l	12	33028	¹⁴
200 l	1	33029	¹⁵



megol Motorenoel Low Ash Energy SAE 0W-30

High performance motor oil based on modern Low-SAPS additive technology and synthetic base oils especially for PSA and Fiat Euro VI engines with exhaust aftertreatment and turbocharging. Provides optimum cleaning and wear protection for the engine, improves the effectiveness of the diesel particulate filter (DPF), prevents it from clogging prematurely, reduces emissions over its entire life, reduces fuel consumption and protects the environment. In addition to use in various vehicles from PSA as well as Fiat, Alfa Romeo (TwinAir and MultiAir engines), this motor oil can also be used in vehicles from other manufacturers that require a motor oil with this specification. Follow the manufacturer's instructions!

1 l	12	33031	²
200 l	1	33032	²

SAE 5W-20



megol Motorenoel New Engine FE SAE 5W-20

Engine oil based on HC synthesis technology with the latest additive technology that has been specially developed for Ford EcoBoost-motors. The low viscosity reduces CO₂ content and the fuel consumption.

1 l	12	9289	¹⁴
5 l	4	9291	¹⁴
20 l	1	9293	¹⁵
60 l	1	9295	¹⁵
200 l	1	9297	¹⁵



megol Special Engine Oil SAE 5W-20

Modern high-performance motor oil. Thanks to the selected HC base oils in combination with the perfectly tuned additives, it has optimum properties specially formulated for gasoline engines on the Asian and American markets. Keeps the engine clean, offers high shear stability and minimizes wear. Ensures quick oil penetration as well as smooth engine running under all operating conditions and is therefore very well suited to the high demands of modern engines. The manufacturer's instructions and specifications must be followed before use!

1 l	12	9498	¹³
5 l	4	9499	¹³
20 l	1	7042	¹⁵
60 l	1	7072	¹⁵

Passenger Cars
SAE 5W-30

1 l	12	6561	¹⁴
1 l	12	9619	¹
5 l	4	6562	¹⁴
5 l	4	9621	¹
20 l	1	6563	¹⁵
60 l	1	6564	¹⁵
200 l	1	6565	¹⁵


megol Motorenoel Compatible SAE 5W-30

High-performance long life motor oil based on modern Low-SAPS Additive Technology and HC synthetic base oils offering a persuasive combination of outstanding properties. Can be used in VW vehicles with and without extended maintenance intervals (WIV), in FSI engines and diesel vehicles, incl. those with a diesel particulate filter (DPF) and turbocharger. Follow the manufacturer's instructions!

1 l	12	3196	¹⁴
5 l	4	3194	¹⁴
20 l	1	9480	¹⁵
60 l	1	9481	¹⁵
200 l	1	9482	¹⁵


megol Motorenoel Efficiency SAE 5W-30

High-grade engine oil based on the low SAPS technology, which has been specially tailored to suit the final exhaust gas treatment systems of the latest generation diesel engines, it can be also used in gasoline engines. It therefore fulfills the highest performance requirements of these modern engines and ensures maximum service life of the diesel particle filter, as well as low wear, clean engine operation and long oil change intervals.

1 l	12	9440	¹⁴
5 l	4	9441	¹⁴
20 l	1	9442	¹⁵
60 l	1	9443	¹⁵
200 l	1	9444	¹⁵


megol Motorenoel Fuel Economy SAE 5W-30

High performance motor oil based on HC synthesis technology with a latest generation additive system (Low-SAPS Technology and reduced HTHS). For maximum fuel savings and efficiency. Meets the high performance requirements of modern gasoline and diesel engines and ensures maximum service life of the diesel particulate filter as well as low wear, clean engine operation and long oil change intervals. Follow the manufacturer's instructions!

1 l	12	6512	¹⁴
5 l	4	6513	¹⁴
20 l	1	6696	¹⁵
60 l	1	4609	¹⁵
200 l	1	6697	¹⁵


megol Motorenoel New Generation SAE 5W-30

High performance motor oil based on HC synthesis technology with a latest generation additive system (Low-SAPS Technology). Complies with the high performance and quality requirements of modern gasoline and diesel engines. Ensures maximum service life and function of the diesel particulate filter (DPF) as well as low wear, clean engine operation and long oil change intervals alongside low fuel consumption. Follow the manufacturer's instructions!

1 l	12	3185	¹⁴
5 l	4	3182	¹⁴
20 l	1	9468	¹⁵
60 l	1	9469	¹⁵
200 l	1	9470	¹⁵


megol Motorenoel Mobility SAE 5W-30

High-performance motor oil based on the most recent low SAPS technology. Specially tailored to suit the requirements of modern exhaust aftertreatment systems. Developed especially for the latest generation of passenger car diesel engines from Renault. Ensures maximum service life of the diesel particulate filter as well as low wear, clean engine operation and long oil change intervals. Follow the manufacturer's instructions!

1 l	12	3189	¹⁴
5 l	4	3187	¹⁴
20 l	1	9472	¹⁵
60 l	1	9473	¹⁵
200 l	1	9474	¹⁵


megol Motorenoel Ecology SAE 5W-30

High-grade engine oil based on the most recent low SAPS technology with reduced HTHS value, which has been specially tailored to suit the requirements of modern final exhaust gas treatment systems. megol Motorenoel Ecology SAE 5W-30 has been specifically developed for Mazda's and Mitsubishi's latest generation of diesel engine cars. It therefore ensures maximum service life of the diesel particle filter, as well as low wear, clean engine operation and long oil change intervals.

Passenger Cars

SAE 5W-30



megol Motorenoel Quality SAE 5W-30

Modern multigrade low-friction motor oil of the latest generation. Suitable for year-round use. Its combination of unconventional HC base oils with the very latest additive technology guarantees low viscosity and high shear resistance. This product reliably prevents the formation of deposits, reduces frictional losses in the engine and optimally protects against wear. Ensures savings in fuel and an extended service life of the engine. Recommended for vehicles with gasoline and diesel engines without diesel particulate filter (DPF), including those with a turbocharger and catalytic converter. Observe the manufacturer's instructions!



megol Motorenoel Surface Protection SAE 5W-30

Modern low-viscosity engine oil for the latest generation of Ford vehicles. This low-viscosity, highly shear-resistant engine oil is sure to prevent deposit build-up, reduces friction loss in the engine and provides optimal wear protection. This leads to savings in fuel consumption while at the same time extending the life of the engine. megol Motorenoel Surface Protection SAE 5W-30 is backwards compatible, i.e. it can also be used in older Ford vehicles.



megol Motorenoel Leichtlauf Engine SAE 5W-30

Multigrade low-friction motor oil of the latest generation. Suitable for year-round use. Its combination of unconventional base oil components with the very latest additive technology guarantees low viscosity and high shear resistance. This product reliably prevents the formation of deposits, reduces frictional losses in the engine and optimally protects against wear. The results are savings in fuel and an extended service life for the engine. Recommended for gasoline and diesel engines, including those with a turbocharger and catalytic converter. Follow the manufacturer's instructions!



megol Motorenoel Dynamik DX 1 SAE 5W-30

High-performance low-friction motor oil based on state-of-the-art synthetic technology. Optimizes fuel consumption. Ensures excellent cold-start behavior, optimum wear protection and outstanding engine cleanliness. The innovative additive technology minimizes the premature pre-ignition at low speed, the so-called low-speed preignition (LSP), and thereby ensures a longer engine life. Ideally suited for extended oil change intervals and extreme demands on the engine. Selected wear protection additives ensure minimum friction with the highest fuel savings. Also suitable for vehicles with start-stop system. Note manufacturer's instructions!

SAE 10W-30



megol Motorenoel LD Super Extra SAE 10W-30

Particularly ageing-resistant base oil and modern additives guarantee multi-grade oils with a high standard of quality. As 10W-30 engine oil it is a true all-year oil. For use in all petrol engines and non-turbocharged fast-running diesel engines, for which multi-grade oils are specified according to API SF/CC or API SF/CD, too.



megol Special Engine Oil SAE 10W-30

Modern high-performance motor oil. Thanks to the selected HC base oils in combination with the perfectly tuned additives, it has optimum properties specially formulated for gasoline engines on the Asian and American markets. Keeps the engine clean, offers high shear stability and minimizes wear. Ensures quick oil penetration as well as smooth engine running under all operating conditions and is therefore very well suited to the high demands of modern engines. The manufacturer's instructions and specifications must be followed before use!

Contents PU Part-No.

1 l	12	6566	¹³
4 l	4	9027	¹³
5 l	4	6567	¹³
20 l	1	6568	¹⁵
60 l	1	6582	¹⁵
200 l	1	6687	¹⁵
IBC 1000 l	1	8497	¹⁵

1 l	12	3193	¹⁴
5 l	4	3192	¹⁴
20 l	1	9476	¹⁵
60 l	1	9477	¹⁵
200 l	1	9478	¹⁵

1 l	12	6373	¹⁴
5 l	4	6376	¹⁴
20 l	1	6539	¹⁵
60 l	1	6361	¹⁵
200 l	1	6325	¹⁵

1 l	12	33018	¹⁴
4 l	4	33040	¹³
5 l	4	33019	¹⁴
20 l	1	33020	¹⁵
60 l	1	33021	¹⁵
200 l	1	33022	¹⁵

5 l 4 9620 ¹

5 l 4 6862 ¹

Passenger Cars
SAE 0W-40

1 l	12	4894	¹⁴
4 l	4	9065	¹⁴
5 l	4	4895	¹⁴
20 l	1	4896	¹⁵
60 l	1	4897	¹⁵
200 l	1	4898	¹⁵


megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40

Modern, fully synthetic low-friction motor oil for year-round use. Its combination of unconventional synthetic base oils with the advanced additive technology guarantees low viscosity and high shear resistance. This product reliably prevents the formation of deposits, reduces frictional losses in the engine and optimally protects against wear. Ensures savings in fuel and an extended service life of the engine. Recommended for gasoline and diesel engines, including those with a turbocharger and catalytic converter. Follow the manufacturer's instructions!

SAE 5W-40

1 l	12	6573	¹⁴
1 l	12	9608	¹
4 l	4	6675	¹⁴
5 l	4	6574	¹⁴
5 l	4	9610	¹
20 l	1	6575	¹⁵
60 l	1	6576	¹⁵
200 l	1	6581	¹⁵


megol Motorenoel Low Emission SAE 5W-40

High-performance motor oil based on HC synthetic technology with a new special additive system (Low-SAPS Technology). Meets the high performance requirements and quality level of modern gasoline and diesel engines. In particular, it guarantees the effectiveness of the Euro 4/Euro 5 emission control systems over very long periods as well as low wear and good engine cleanliness. Particularly suitable for pump-jet engines (PD) from Volkswagen (VAG). Also for Ford Galaxy models with VAG PD engines. Follow the manufacturer's instructions!

1 l	12	3199	¹³
5 l	4	3198	¹³
20 l	1	9484	¹⁵
60 l	1	9485	¹⁵
200 l	1	9486	¹⁵


megol Motorenoel High Condition SAE 5W-40

Premium low-friction motor oil for year-round use. Developed for modern injection engines with and without turbocharger. Its combination of unconventional hydrocrack-based base oils with the very latest additive technology guarantees low viscosity and high shear resistance. The perfectly tailored formulation prevents deposits, lowers friction losses and provides optimum protection for the engine against wear. This delivers fuel savings while prolonging the life of the engine, among other benefits. Follow the manufacturer's instructions!

1 l	12	4808	¹⁴
4 l	4	4355	¹⁴
5 l	4	4809	¹⁴
20 l	1	4810	¹⁵
60 l	1	4811	¹⁵
200 l	1	4812	¹⁵


megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)

Modern, fully synthetic low-friction motor oil for year-round use. Its combination of unconventional synthetic base oils with the advanced additive technology guarantees low viscosity and high shear resistance. This product reliably prevents the formation of deposits, reduces frictional losses in the engine and optimally protects against wear. The results are savings in fuel and an extended service life for the engine. Recommended for gasoline and diesel engines (without diesel particulate filter), including those with a turbocharger and catalytic converter. Follow the manufacturer's instructions!

1 l	12	4361	¹⁴
4 l	4	6486	¹⁴
5 l	4	6328	¹⁴
20 l	1	4359	¹⁵
60 l	1	4358	¹⁵
200 l	1	6398	¹⁵


megol Motorenoel Ultra Performance Longlife SAE 5W-40

Modern low-friction motor oil based on HC synthetic oils. Its perfectly tailored combination of additives reliably prevents the formation of deposits, reduces frictional losses in the engine and optimally protects against wear. It therefore results in fuel savings and at the same time leads to a longer service life of the engine. Offering a wide range of applications, it is ideally suited for vehicles with gasoline and diesel engines (without diesel particulate filter) with and without turbocharging. Follow the manufacturer's instructions!

4 l	4	33002	¹
-----	---	-------	--------------


megol Motorenoel Super Leichtlauf 5W-50

Modern fully synthetic low-friction motor oil for use all year round. A combination of unconventional synthetic base oils and advanced additive technology ensures our motor oils offer low viscosity and high shear stability and reliably prevents the formation of deposits, reduces frictional loss in the engine and provides optimal protection against wear. This in turn results in fuel savings and an extended service life for the engine. Suitable for gasoline and diesel engines, including those with turbochargers and catalytic converters.

Passenger Cars

SAE 10W-40



megol Motorenoel Syntech Premium SAE 10W-40

Premium low-friction motor oil. Its optimized combination of high-tech fluids, modern additive technology and synthetic components makes it suitable for year-round use in gasoline and diesel engines with and without turbocharging. It improves engine performance and reduces friction and wear. Ideal for use in older vehicles (young-timers). Follow the manufacturer's instructions!

Contents PU Part-No.

1 l	12	4339	13
1 l	12	9600	1
4 l	4	6475	13
5 l	4	9601	1
5 l	4	4338	13
20 l	1	4797	15
60 l	1	4798	15
200 l	1	4799	15
IBC 1000 l	1	6884	15



megol Motorenoel Syntech Premium Diesel SAE 10W-40

Low viscosity engine oil with modern additive technology and synthesis components. It is suitable for all-year use diesel engines with and without turbo chargers. It improves engine performance, reduces friction and wear and also reduces fuel consumption.

1 l	12	4340	14
5 l	4	4637	14
20 l	1	4638	15
60 l	1	4639	15
200 l	1	4640	15



megol Motorenoel Power Synt SAE 10W-40

Premium low-friction motor oil. Its optimized combination of high-tech fluids, modern additive technology and synthetic components allows it to be used year-round in gasoline and diesel engines with and without turbochargers. Improves engine performance, reduces friction and wear and lowers fuel consumption. Follow the manufacturer's instructions!

1 l	12	4804	13
4 l	4	4364	13
5 l	4	4800	13
20 l	1	4805	15
60 l	1	4806	15
200 l	1	4807	15



megol Super Performance SAE 10W-40 (teilsynthetisch)

Modern, low-friction motor oil for year-round use. Its combination of synthetic and mineral base oils with modern additive technology guarantees low viscosity. Reduces the friction losses of the engine, protects against wear and so prolongs the life of the engine. To ensure full performance, avoid mixing with other motor oils. Follow the manufacturer's instructions!

1 l	12	4366	14
4 l	4	3517	5
5 l	4	4365	14
20 l	1	6476	15
60 l	1	6460	15
200 l	1	6491	15

SAE 15W-40



megol Motorenoel HD-C3 SAE 15W-40

High performance multigrade motor oil that is particularly suitable for economical year-round use as a universal oil in mixed vehicle fleets. Thanks to its carefully selected additive package combined with outstanding base oils, it can be used in modern high performance diesel engines as well as in gasoline engines. Meets the requirements of major diesel and gasoline engine manufacturers. The ideal lubricant for diesel and gasoline engines with and without catalytic converters, including those with exhaust gas turbochargers. Also recommended for older vehicles (youngtimers). Follow the manufacturer's instructions!

1 l	12	4729	14
4 l	4	6478	14
5 l	4	4728	14
20 l	1	4727	15
60 l	1	4725	15
200 l	1	4716	15



megol Motorenoel Universal SAE 15W-40

Multigrade motor oil. As a year-round oil, suitable for use in passenger cars as well as commercial vehicles. Meets the requirements of major diesel and gasoline engine manufacturers. The ideal engine lubricant for gasoline engines with and without catalytic converters and for diesel engines including exhaust gas turbochargers of the Euro 1 to Euro 3 generation. The combination of additives it contains delivers extraordinary protection against wear and keeps the engine clean. Follow the manufacturer's instructions!

1 l	12	4696	14
4 l	4	9149	14
5 l	4	4689	14
20 l	1	4678	15
60 l	1	4844	15
200 l	1	4845	15

Passenger Cars
SAE 15W-40

1 l	12	4373	¹⁴
4 l	4	4372	¹⁴
5 l	4	1670	¹⁴
20 l	1	1671	¹⁵
60 l	1	1672	¹⁵
200 l	1	1673	¹⁵


megol Motorenoel HD Super Turbo SAE 15W-40

Multigrade oil of a high quality level. Suitable for year-round use. For all non-turbocharged, fast-running diesel and gasoline engines for which a multigrade oil compliant with API SF/CF is specified. Its package of additives ensures wear protection and engine cleanliness, among other benefits. Ideally suited for passenger cars (young-timers), light commercial vehicles and old construction and agricultural machinery. Follow the manufacturer's instructions!

SAE 20W-50

1 l	12	4384	¹⁴
1 l	12	9628	¹
4 l	4	9148	¹⁴
5 l	4	4381	¹⁴
20 l	1	6484	¹⁵
60 l	1	6863	¹⁵
200 l	1	6485	¹⁵


megol Motorenoel Universal SAE 20W-50

High performance multi-grade engine oil which is particularly suitable for use as an all-year oil in commercial vehicles. It meets the requirements of all main national and international petrol and diesel engine manufacturers. The ideal engine lubricant for petrol engines with and without catalytic converters and for diesel engines including turbo chargers, especially for the generation of EURO I to EURO III engines.

1 l	12	4627	¹⁴
5 l	4	4628	¹⁴
20 l	1	4886	¹⁵


megol Motorenoel HD-C3 Super Turbo SAE 20W-50

A motor oil that meets the requirements of all main national and international diesel and gasoline engine manufacturers. That makes it the ideal engine lubricant not only for gasoline engines with or without a catalytic converter, but also for diesel engines including those with exhaust-gas turbochargers, especially the Euro I to Euro III generations.

Truck
SAE 5W-30

20 l	1	9494	¹⁵
60 l	1	7077	¹⁵
200 l	1	9495	¹⁵


megol Motorenoel Premium Truck LA SAE 5W-30

Modern, semi-synthetic low-friction diesel oil based on the latest additive technology. With low sulfate ash, phosphorous and sulfur content (low SAPS). Developed for the latest generation of supercharged Euro 4, Euro 5 and Euro 6 diesel engines with exhaust aftertreatment system and a particulate filter (DPF/CRT). It meets the requirements of global commercial vehicle engine manufacturers. Follow the manufacturer's instructions!

20 l	1	9492	¹⁵
60 l	1	9491	¹⁵
200 l	1	9490	¹⁵


megol Motorenoel UHPD Truck SAE 5W-30

Low viscosity engine oil of the latest generation. Due to its outstanding attributes it is for use in all commercial vehicle diesel engines, under all operating conditions and all environmental stresses (all-year oil). Advanced additive technology, in association with Hydrocrack base oils, guarantee outstanding wear protection properties and enable maximum oil change intervals. Can be mixed with all commercially available engine oils. Recommended for use with diesel engines only.

Truck**SAE 10W-40****megol Motorenoel Low SAPS SAE 10W-40**

Diesel motor oil based on synthesis technology with a low content of sulfate ash, phosphorus and sulfur (low SAPS). Developed for supercharged Euro 4 and Euro 5 diesel engines with sophisticated exhaust aftertreatment systems and particulate filters (DPF/CRT). Follow the manufacturer's instructions!

Contents PU Part-No.

5 l	4	9488	14
20 l	1	6583	15
60 l	1	6584	15
200 l	1	6585	15

**megol Motorenoel Truck Mid SAPS SAE 10W-40**

Modern, high-performance motor oil. This heavy-duty motor oil additive, used in combination with base oils produced using state-of-the-art synthetic technology, reliably prevents deposits from forming, reduces frictional loss in the engine and provides optimum protection against wear. This combination reduces friction in the engine and therefore provides for a noticeably better engine performance and significantly lower fuel consumption.

20 l	1	33003	15
60 l	1	33004	15
200 l	1	33005	15

**megol Motorenoel UHDP Long Drain SAE 10W-40**

Modern engine oil for commercial engines, under all operating conditions and all environmental stresses (all-year oil). Research and testing over years have resulted in an engine oil with outstanding properties. Advanced additive technology and the use of hydrocrack base oils, guarantees outstanding low-viscosity and wear protection properties and enables maximum oil change intervals.

20 l	1	8548	15
60 l	1	8637	15
200 l	1	8638	15

**megol Motorenoel Super LL DIMO Premium SAE 10W-40**

Modern commercial vehicle motor oil. Can be used year-round under all operating conditions and all environmental stresses. Research and testing over many years have resulted in outstanding properties. Innovative additive technology and the use of hydrocrack base oils guarantee outstanding low-viscosity and wear protection properties. Allows longer oil change intervals. Meets the specifications and requirements of the major commercial vehicle manufacturers. Follow the manufacturer's instructions!

5 l	4	6868	14
20 l	1	6337	15
60 l	1	6536	15
200 l	1	6537	15

**megol Motorenoel Super Leichtlauf FAMO SAE 10W-40**

Modern universal low-friction motor oil for use in all engines, especially commercial vehicles. Can be used under all operating conditions as a year-round oil. Meets the high requirements of diesel engines, but can also be used in gasoline engines. Its additive technology guarantees outstanding low-viscosity and wear protection properties and enables maximum oil change intervals. To ensure full performance, avoid mixing with other motor oils. Follow the manufacturer's instructions!

5 l	4	4356	14
20 l	1	4846	15
60 l	1	4847	15
200 l	1	4865	15

SAE 15W-40**megol Motorenoel SHPD SAE 15W-40**

Super high-performance diesel motor oil. Approved for extended oil change intervals in accordance with the recommendations of commercial vehicle manufacturers. Multigrade diesel motor oil with the highest possible reserve capacity, allowing full use to be made of the maximal oil change intervals of up to 45,000 km according to the maintenance system of the relevant engine manufacturers. Its combination of high-quality base oils and perfectly tailored additive packages ensures a wide range of applications and guarantees optimum engine performance and wear protection. Follow the manufacturer's instructions!

5 l	4	1678	14
20 l	1	1674	15
60 l	1	1675	15
200 l	1	1676	15

Truck
SAE 15W-40

20 l	1	6349	¹⁵
200 l	1	4693	¹⁵


megol Motorenoel Performance SHPD 15W-40

Super high-performance diesel engine oil of the new generation, approved for extended oil change intervals in accordance with the latest recommendations of utility vehicle manufacturers. It is a multi-purpose diesel engine oil with the highest possible reserve capacity which allows full use to be made of the maximal oil change intervals of up to 45,000 km according to the most recent maintenance system of the engine manufacturers.

20 l	1	4324	¹⁵
60 l	1	6393	¹⁵
200 l	1	6490	¹⁵


megol Motorenoel Performance TOP TRANS SAE 15W-40

Modern universal motor oil for use in all engines, especially commercial vehicles. Can be used under all operating conditions as a year-round oil. Meets the high requirements of diesel engines, but can also be used in gasoline engines. Its additive technology guarantees outstanding low-viscosity and wear protection properties and enables maximum oil change intervals. Follow the manufacturer's instructions!

20 l	1	9276	¹⁵
60 l	1	9278	¹⁵
200 l	1	9281	¹⁵


megol Motorenoel Global Truck SHPD SAE 15W-40

Super high-performance diesel motor oil that is approved for extended oil change intervals in accordance with the recommendations of commercial vehicle manufacturers. It meets the requirements of global commercial vehicle engine manufacturers and is particularly suitable for use in engines complying with the Euro IV to Euro VI emissions standard.

20 l	1	8416	¹⁵
------	---	------	---------------


megol Motorenoel SHPD SAE 15W-40 TBN 20

Modern engine oil for commercial engines, under all operating conditions and all environmental stresses (all-year oil). It fulfills the highest demands that modern diesel engines currently place on engine oils. Advanced additive technology guarantees outstanding low-viscosity and wear protection properties and enables maximum oil change intervals.

SAE 20W-50

20 l	1	6364	¹⁵
60 l	1	6665	¹⁵
200 l	1	6362	¹⁵


megol Motorenoel SHPD SAE 20W-50

Super high-performance diesel engine oil of the new generation, approved for extended oil change intervals in accordance with the latest recommendations of commercial vehicle manufacturers. It is a multi-purpose diesel engine oil with the highest possible reserve capacity which allows full use to be made of the maximal oil change intervals of up to 45,000 km according to the most recent maintenance system of engine manufacturers.

Mixed fleet**SAE 10W-40****megol Motorenoel Synergetic SAE 10W-40**

Multigrade motor oil. Suitable for economical year-round use as a universal oil in mixed vehicle fleets. Thanks to its carefully selected package of active ingredients combined with outstanding base oils, it can be used in high performance diesel engines as well as in gasoline engines. Follow the manufacturer's instructions!

Contents PU Part-No.

1 l	12	6332	14
5 l	4	6333	14
20 l	1	4310	15
60 l	1	6334	15
200 l	1	6871	15

**megol Motorenoel Super Leichtlauf FAMO SAE 10W-40**

Modern universal low-friction motor oil for use in all engines, especially commercial vehicles. Can be used under all operating conditions as a year-round oil. Meets the high requirements of diesel engines, but can also be used in gasoline engines. Its additive technology guarantees outstanding low-viscosity and wear protection properties and enables maximum oil change intervals. To ensure full performance, avoid mixing with other motor oils. Follow the manufacturer's instructions!

5 l	4	4356	14
20 l	1	4846	15
60 l	1	4847	15
200 l	1	4865	15

SAE 15W-40**megol Motorenoel HD-C3 SAE 15W-40**

High performance multigrade motor oil that is particularly suitable for economical year-round use as a universal oil in mixed vehicle fleets. Thanks to its carefully selected additive package combined with outstanding base oils, it can be used in modern high performance diesel engines as well as in gasoline engines. Meets the requirements of major diesel and gasoline engine manufacturers. The ideal lubricant for diesel and gasoline engines with and without catalytic converters, including those with exhaust gas turbochargers. Also recommended for older vehicles (youngtimers). Follow the manufacturer's instructions!

1 l	12	4729	14
4 l	4	6478	14
5 l	4	4728	14
20 l	1	4727	15
60 l	1	4725	15
200 l	1	4716	15

**megol Motorenoel Universal SAE 15W-40**

Multigrade motor oil. As a year-round oil, suitable for use in passenger cars as well as commercial vehicles. Meets the requirements of major diesel and gasoline engine manufacturers. The ideal engine lubricant for gasoline engines with and without catalytic converters and for diesel engines including exhaust gas turbochargers of the Euro 1 to Euro 3 generation. The combination of additives it contains delivers extraordinary protection against wear and keeps the engine clean. Follow the manufacturer's instructions!

1 l	12	4696	14
4 l	4	9149	14
5 l	4	4689	14
20 l	1	4678	15
60 l	1	4844	15
200 l	1	4845	15

SAE 20W-50**megol Motorenoel Universal SAE 20W-50**

High performance multi-grade engine oil which is particularly suitable for use as an all-year oil in commercial vehicles. It meets the requirements of all main national and international petrol and diesel engine manufacturers. The ideal engine lubricant for petrol engines with and without catalytic converters and for diesel engines including turbo chargers, especially for the generation of EURO I to EURO III engines.

1 l	12	4384	14
4 l	4	9148	14
5 l	4	4381	14
20 l	1	6484	15
60 l	1	6863	15
200 l	1	6485	15

**megol Motorenoel HD-C3 Super Turbo SAE 20W-50**

A motor oil that meets the requirements of all main national and international diesel and gasoline engine manufacturers. That makes it the ideal engine lubricant not only for gasoline engines with or without a catalytic converter, but also for diesel engines including those with exhaust-gas turbochargers, especially the Euro I to Euro III generations.

1 l	12	4627	14
5 l	4	4628	14
20 l	1	4886	15

20 l	1	4681	¹⁵
60 l	1	4682	¹⁵
200 l	1	4687	¹⁵



megol Motorenoel HD-C3 SG (Single-Grade) SAE 10W

This single-grade engine oils with a naturally high viscosity index are made from a basis of extremely ageing-resistant solvent raffinates together with optimally selected active agents. Its specific properties make it ideal for use in turbocharged diesel engines and for diesel engines in extreme operating conditions. Its high alkaline reserve prevents corrosion even when diesel fuel with a high sulphur content is used.

20 l	1	4817	¹⁵
60 l	1	4818	¹⁵
200 l	1	6881	¹⁵



megol Motorenoel HD-C3 SG (Single-Grade) SAE 20W-20

These single-grade engine oils with a naturally high viscosity index are made from a basis of extremely ageing-resistant solvent raffinates together with optimally selected active agents. Its specific properties make it ideal for use in turbocharged diesel engines and for diesel engines in extreme operating conditions. Its high alkaline reserve prevents corrosion even when diesel fuel with a high sulphur content is used.

1 l	12	4683	¹⁴
20 l	1	4685	¹⁵
60 l	1	4686	¹⁵
200 l	1	4849	¹⁵



megol Motorenoel HD-C3 SG (Single-Grade) SAE 30

These single-grade engine oils with a naturally high viscosity index are made from a basis of extremely ageing-resistant solvent raffinates together with optimally selected active agents. Its specific properties make it ideal for use in turbocharged diesel engines and for diesel engines in extreme operating conditions. Its high alkaline reserve prevents corrosion even when diesel fuel with a high sulphur content is used.

20 l	1	4301	¹⁵
200 l	1	6399	¹⁵



megol Motorenoel HD-C3 SG (Single-Grade) SAE 40

These single-grade engine oils with a naturally high viscosity index are made from a basis of extremely ageing-resistant solvent raffinates together with optimally selected active agents. Its specific properties make it ideal for use in turbocharged diesel engines and for diesel engines in extreme operating conditions. Its high alkaline reserve prevents corrosion even when diesel fuel with a high sulphur content is used.

5 l	4	4306	¹⁴
20 l	1	4626	¹⁵
200 l	1	4632	¹⁵



megol Motorenoel HD-C3 SG (Single-Grade) SAE 50

These single-grade engine oils with a naturally high viscosity index are made from a basis of extremely ageing-resistant solvent raffinates together with optimally selected active agents. Its specific properties make it ideal for use in turbocharged diesel engines and for diesel engines in extreme operating conditions. Its high alkaline reserve prevents corrosion even when diesel fuel with a high sulphur content is used.

200 l	1	9214	¹⁵
-------	---	------	---------------



megol Motorenoel HD Super SAE 20W-20

A single-grade engine oil with a naturally high viscosity index, with ageing-resistant base oils and optimally selected additives. It guarantees proper engine lubrication and optimal wear protection. For use in petrol and diesel engines, when engine oils with API SF-CD are allowed.

Motorcycle / motorboat

2-stroke



megol Zweitaktmotorenöl TC (teilsynthetisch)

High quality, high performance engine oil to lubricate two-stroke engines. The combination of synthetic, and mineral oil-based oils with the latest additives ensures optimal lubrication and guarantees low smoke. As a result of its specific viscosity value it is ideal both for separate lubrication and for mixed lubrication in the prescribed mixture ratios for aircooled two-stroke engines.



megol Zweitaktmotorenöl TC

High quality, efficient engine oil for two-stroke engines, based on mineral oil. Because of its special viscosity setting megol Zweitaktmotorenöl TC can be used safely for separate and mixed lubrication in the specified mixing ratio in air-cooled two stroke engines.



megol Zweitaktmotorenöl GD (vollsynthetisch)

Is made of synthetic base oils and additives and satisfies or exceeds the highest requirements currently placed world-wide on engine oil for two-stroke engines for on-road and off-road use. It produces extremely low smoke levels and no residue and protects the engine and exhaust system from deposits. As a result of its fully synthetic composition it is highly stable in thermal terms and extremely effective against wear. Perfect viscosity setting allows it to be used safely both for separate lubrication and for mixed lubrication in the specified mixing ratio in air-cooled and watercooled two-stroke engines on land vehicles. It is a high quality, high performance engine oil that is particularly suitable for lubricating air-cooled high performance two strokes engines in chain saws.



megol Outboard Motoroil TC-W3

A motor oil designed specifically for water-cooled 2-stroke high-performance engines, and in particular for outboard motors. The use of advanced ash-free additive technology in conjunction with selected base oils guarantees optimum lubrication and outstanding corrosion protection – even in salty air – and ensures that the engine runs with minimal wear, permits residue-free combustion and prevents uncontrolled ignition, the formation of deposits in the combustion chamber, carbon build-up in the exhaust ports and the piston rings from sticking. Please adhere to the prescribed mixture ratio specified by the engine manufacturer.

4-stroke



megol Motorenöl 4-Takt SAE 20W-50

Modern engine oil for use in two-wheeler four-stroke engines. The combination of synthetic and mineral base oils with advanced additive technology guarantees an outstanding engine oil that provides excellent protection for the engine against wear. Especially for use in thermal highly stressed two-wheeler four-stroke engines.



megol Motorenöl RACER SAE 10W-60 (vollsynthetisch)

Modern engine oil specifically designed for use in extremely stressed four-stroke engines. The combination of synthetic base oils and progressive additive technology guarantees an outstanding engine oil that provides excellent protection for the engine against wear. The synthetic components give it an extremely high quality level that is particularly useful for use in engines that are exposed to high thermal stresses.

Contents PU Part-No.

250 ml	12	9026	¹⁴
1 l	12	9025	¹⁴
20 l	1	4883	¹⁵
200 l	1	4850	¹⁵

1 l	12	4880	¹⁴
20 l	1	4881	¹⁵
60 l	1	4882	¹⁵
200 l	1	6345	¹⁵

1 l	12	6523	¹⁴
20 l	1	8603	¹⁵
60 l	1	8830	¹⁵

20 l 1 6525 ¹⁵

20 l 1 6514 ¹⁵

1 l 12 6524 ¹⁴
20 l 1 4353 ¹⁵

Motorcycle / motorboat
4-stroke

1 l	12	9609	¹
20 l	1	9687	²
200 l	1	9688	²


megol Motorenoel Racing 4T SAE 10W-40

Special oil for optimum engine performance, as well as for air- and water-cooled four-stroke motorcycle engines. Specially selected base oil components and additives ensure high lubrication and cleanliness inside the engine. megol Motorenoel Racing 4T SAE 10W-40 is economical on fuel, allows good cold start performance and is suitable for all-year use under both normal and difficult conditions.

GEAR OILS
ATF

1 l	6	6479	¹⁶
20 l	1	4879	¹⁵
60 l	1	4877	¹⁵
200 l	1	4861	¹⁵


megol Hydraulikoel ATF Dexron II D

Hydraulic fluid for automatic transmissions and hydraulic clutches which require a Dexron D type automatic transmission fluid. Guarantees perfect functioning of the fluid transmissions even under the most strenuous operating conditions and large temperature fluctuations. Also suitable for systems functioning under strenuous operating conditions.

1 l	6	4875	¹⁴
1 l	6	9638	¹
5 l	4	6477	¹⁴
20 l	1	4876	¹⁵
60 l	1	4659	¹⁵
200 l	1	4862	¹⁵


megol Transmission-Fluid ATF III (rot)

megol Transmission-Fluid ATF III (red) is an hydraulic fluid for automatic gear boxes and hydraulic clutches, which require a Dexron III type automatic transmission fluid. Guarantees perfect functioning of the fluid transmissions even under the most strenuous operating conditions and large temperature fluctuations. Also suitable for systems functioning under strenuous operating conditions.

1 l	6	6839	¹³
1 l	6	9073	⁹
5 l	4	9147	¹⁴


megol Transmission-Fluid ATF III G

megol Transmission-Fluid ATF III is an hydraulic fluid for automatic gear boxes and hydraulic clutches, which require a Dexron III type automatic transmission fluid. Guarantees perfect functioning of the fluid transmissions even under the most strenuous operating conditions and large temperature fluctuations. Also suitable for systems functioning under strenuous operating conditions.

1 l	6	9013	⁹
-----	---	------	--------------


megol Getriebeoel ATF Variable Gelb

One of the latest generation automatic gearbox oils, based on HC synthesis base oils combined with the most modern, efficient additives. It meets the demands of several manufacturers of automatic transmissions and vehicles around the world. megol Getriebeoel ATF Variable yellow is suitable for use in automatic transmissions, manual transmissions, clutch and steering systems, hydraulic systems and auxiliary drives, both in passenger cars and commercial vehicles.

1 l	6	9424	¹⁴
20 l	1	3168	¹⁵
200 l	1	2470	¹⁵


megol Getriebeoel ATF Smooth

Automatic transmission oil based on high quality synthetic base oils combined with the latest additive technology to meet the requirements on the new generation of Mercedes-Benz NAT 2 passenger car automatic transmissions up to 7-speed automatic. Megol Getriebeoel ATF Smooth is an excellent problem solver with shifting problems.



megol Getriebeoel ATF Variable

One of the latest generation automatic gearbox oils, based on HC synthesis base oils combined with the most modern, efficient additives. It meets the demands of several manufacturers of automatic transmissions and vehicles around the world. megol Getriebeoel ATF Variable is suitable for use in automatic transmissions, manual transmissions, clutch and steering systems, hydraulic systems and auxiliary drives, both in passenger cars and commercial vehicles.

1 l	6	9427	14
20 l	1	3171	15
200 l	1	9008	15



megol Getriebeoel ATF Variable Low Viscosity

One of the latest generation automatic gearbox oils, based on HC synthesis base oils combined with the most modern, efficient additives. Its low viscosity contributes to efficient fuel consumption and allows optimum shifting under all operating conditions. It meets the demands of several manufacturers of automatic transmissions and vehicles around the world. The instructions issued by the manufacturers are to be followed.

1 l	6	33007	13
20 l	1	33010	15



megol Getriebeoel CVT Dynamik

High-performance automatic gearbox oil specially formulated to be used in the new CVT transmission generation. The basis of selected base oils and special additives offers the best possible protection against foaming, necessary in CVT transmissions. It also features a good ageing and oxidation stability. megol CVT Dynamik is tried and tested, especially in the Autotronic transmissions used in Mercedes A and B classes, and also in many different manufacturers' continuously variable automatic transmissions (among others also Audi Multitronic).

1 l	6	9452	13
20 l	1	3172	15



megol Doppelkupplungsgetriebe Fluid

High-performance gear oil which has been specially developed for the dual clutch transmissions used by the VW Group (i.e. in VW, Audi, Skoda and Seat vehicles). Only top quality HC synthetic base oils are used for the fluid in combination with an exclusive additive technology. This consistently guarantees stable friction characteristics, even under extreme conditions. Under no circumstances should this oil be mixed with other dual clutch oils.

1 l	6	3529	13
20 l	1	33053	15
IBC 1000 l	1	33036	15



megol Getriebeoel ATF G7

High-performance automatic transmission fluid especially for use in Mercedes-Benz 7-speed automatic transmissions of the latest generation. Offers outstanding performance thanks to the highest quality base oils and a perfectly tuned additive package, allowing the automatic transmission to operate optimally under all operating conditions. With fuel saving potential thanks to reduced viscosity. The specifications and instructions from the assembly or vehicle manufacturer must be followed.

1 l	6	33050	14
-----	---	-------	----



megol Getriebeoel ATF G9

Automatic transmission fluid especially for use in Mercedes-Benz 9-speed automatic transmissions of the latest generation. Offers outstanding performance thanks to the highest quality base oils and a perfectly tuned additive package, guaranteeing optimal shifting and work processes. Convincing thanks to its very high efficiency, lower fuel consumption and improved low-temperature properties. The specifications and instructions from the assembly or vehicle manufacturer must be followed.

1 l	6	33051	14
-----	---	-------	----

1 l 6 33047¹⁴

megol Getriebeoel MTF GT1 75W

High-performance transmission fluid specifically for manual and automated manual transmissions. Recommended particularly for use in vehicles from Audi, BMW, Fiat, Ford, Seat, Škoda and VW. Offers excellent shifting comfort under all operating conditions, fuel saving potential, excellent shear stability and optimum synchronous behavior. Enables optimum wear and corrosion protection as well as excellent oxidation stability through the use of the highest quality raw materials.

 1 l 6 33048¹⁴

megol Getriebeoel MTF GT2 75W-80

High-performance transmission fluid specifically for use in manual transmissions from BMW, Ford, Honda, Nissan, the PSA Group and other manufacturers. Also suitable transaxle transmissions and transfer cases. Characterized by excellent wear protection, savings potential in terms of fuel consumption and emissions, and optimum thermal and oxidative stability. Enables very smooth, driver-friendly shifting operations with reduced shifting forces.

 1 l 6 33049¹⁴

megol Getriebeoel MTF GT3 70W-75W

Low-viscosity, fully synthetic high-performance transmission fluid especially for manual and automated manual transmissions. Recommended particularly for use in vehicles from Audi, Seat, Škoda and Volkswagen. Offers excellent oxidation and wear protection as well as high fuel saving potential. Enables excellent driving comfort under all operating conditions. Shear stability and synchronous behavior at the highest level guarantee optimum work processes.

Manual and axle transmission
GL 4

 1 l 6 8609¹⁰

 20 l 1 4374¹⁵

 60 l 1 6366¹⁵

 200 l 1 6527¹⁵

megol Mehrzweckgetriebeoel GL 4 SAE 80W

High-grade gearbox oil with a wide range of uses for high tooth flank stresses. Gearbox oils of this type are recommended by motor vehicle and gearbox manufacturers for use in synchromeshed and non-synchromeshed manual gearboxes, power units for building machinery, agricultural machinery and tractors and axle drives exposed to normal stresses.

 20 l 1 4888¹⁵

 60 l 1 4889¹⁵

 200 l 1 4890¹⁵

megol Mehrzweckgetriebeoel GL 4 SAE 85W-90

High-grade gearbox oil with a wide range of uses for high tooth flank stresses. Gearbox oils of this type are recommended by motor vehicle and gearbox manufacturers for use in synchronised and nonsynchronised manual gearboxes, power units for building machinery, agricultural machinery and tractors.

 20 l 1 6314¹⁵

 200 l 1 6508¹⁵

megol Mehrzweckgetriebeoel GL 4 SAE 140

High-grade gearbox oil with a wide range of uses for high tooth flank stresses. Gearbox oils of this type are recommended by motor vehicle and gearbox manufacturers for use in synchronised and non-synchronised manual gearboxes, power units for building machinery, agricultural machinery and tractors and axle drives exposed to normal stresses.

Manual and axle transmission

GL 4



megol Hochleistungsgtriebeöl GL 4 SAE 75W-80

Designed for use in manual gearboxes with re/intarder, mechanic non-synchromeshed gearings, drives and additional gearings. megol Hochleistungsgtriebeöl GL 4 SAE 75W-80 can be used in commercial vehicles – including extended oil changing intervals up to 320,000 km – and in cars. It can be used when shifting problems occur with API GL 4 single grade oils, too.

Contents PU Part-No.

20 l	1	8613	¹⁵
60 l	1	6667	¹⁵
200 l	1	8615	¹⁵



megol Premium Getriebeöl HC GL 4 SAE 75W-80

Gearbox oil based on HC synthetic technology which is suitable for use in manual transmissions especially those with retarders/intarders, mechanical non-synchronized transmissions, steering systems and auxiliary transmissions. megol Premium Getriebeöl HC GL 4 SAE 75W-80 can be used in commercial vehicles – even for extended oil change intervals up to 320,000 km – and in passenger cars. It can also be used in cases where difficulties arise in shifting gears using single-grade oils/higher viscosity API GL 4 products, for example.

20 l	1	6841	¹⁵
200 l	1	6843	¹⁵



megol Mehrzweckgetriebeöl GL 4 SAE 75W-90

This semi synthetic multi-grade gearbox oil is suitable at low and high temperatures. Reduction of friction helps reduce fuel consumption. It is a multi-purpose oil with wide range of use in vehicle gearboxes, mainly in manual transmissions. At low temperatures it eliminates gear shifting problems and noise development in manual transmissions.

1 l	6	4867	¹⁴
20 l	1	4824	¹⁵
60 l	1	4825	¹⁵
200 l	1	4826	¹⁵



megol Mehrzweckgetriebeöl GL 4 SAE 80W-90

High-grade gearbox oil with a wide range of uses for high tooth flank stresses. Gearbox oils of this type are recommended by motor vehicle and gearbox manufacturers for use in synchronised and nonsynchronised manual gearboxes, power units for building machinery, agricultural machinery and tractors.

1 l	6	4866	¹⁴
20 l	1	4821	¹⁵
60 l	1	4822	¹⁵
200 l	1	4823	¹⁵



megol Hypoid-Getriebeöl GL 4 + SAE 75W-90

Fully synthetic multi-grade gearbox oil with anti-corrosion and high pressure properties for low and high temperatures. Reduction of friction helps reduce fuel consumption. Multi-purpose gearbox oil with a wide range of uses in vehicle gearboxes, in particular manual transmissions. At low temperatures it eliminates gear shifting problems and noise development in manual transmissions. As a result of its fully synthetic base oils, together with modern additive technology, this lubricant guarantees outstanding wear protection in all operating conditions in both summer and winter, and is even suitable for Arctic conditions.

1 l	6	3535	¹⁴
20 l	1	8616	¹⁵
60 l	1	6668	¹⁵
200 l	1	8618	¹⁵

GL 5

20 l	1	6315	¹⁵
200 l	1	8620	¹⁵


megol Hypoid-Getriebeoel GL 5 SAE 80W

High quality motor vehicle gearbox oil for highest stresses. Strictly recommended for use in axle drives with hypoid gearing.

20 l	1	4878	¹⁵
60 l	1	4869	¹⁵
200 l	1	4870	¹⁵


megol Hypoid-Getriebeoel GL 5 SAE 85W-90

High quality motor vehicle gearbox oil for highest stresses. Strictly recommended for use in axle drives with hypoid gearing.

20 l	1	8621	¹⁵
60 l	1	8622	¹⁵
200 l	1	4378	¹⁵


megol Hypoid-Getriebeoel GL 5 SAE 140

High quality automotive gearbox oil for highest stresses.

1 l	6	9435	¹⁴
20 l	1	9437	¹⁴
60 l	1	9438	¹⁴


megol Spezial MTF GL 5 SAE 75W-80

Specially developed gearbox oil which is particularly notable for the fact that it means that gearshifts in the gearbox can be completed easily and precisely even in low temperatures and with a high load. This product was specially developed for Peugeot and Citroën manual transmissions and can also be used for solving problems relating to noise build-up and gearshift difficulties for gearboxes from other manufacturers.

20 l	1	8623	¹⁵
60 l	1	8624	¹⁵


megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (teilsynthetisch)

Partly synthetic multi-grade gearbox oil with anti-corrosion and ultra-high pressure properties providing optimum lubrication at low and high temperatures. Reduction of friction helps reduce fuel consumption. Used in vehicle axle transmissions and for common lubrication of change gearboxes and differentials enclosed in a single casing. At low temperatures it eliminates gear shifting problems and noise development in manual transmissions.

1 l	6	4868	¹⁴
20 l	1	4827	¹⁵
60 l	1	4829	¹⁵
200 l	1	4830	¹⁵


megol Hypoid-Getriebeoel GL 5 SAE 80W-90

Temperature and oxidation-resistant multi-grade gearbox oil with active agents to reduce wear on bearings and tooth flanks. Special additives prevent rust and foam formation. Suitable for use as a hypoid gearbox oil with a wide range of applications in vehicle gearboxes such as end drives and change gearboxes, where EP gearbox oils of this class are recommended.

Manual and axle transmission

GL 5



megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)

Fully synthetic multi-grade gearbox oil with anti-corrosion and high pressure properties for low and high temperatures. Reduction of friction helps reduce fuel consumption. Hypoid gearbox oil with a wide range of uses in vehicle gearboxes, including manual transmissions if GL 5 oils are permitted. At low temperatures it eliminates starting and gear shifting problems and noise development in manual transmissions. As a result of its fully synthetic base oils, together with modern additive technology, this lubricant guarantees outstanding wear protection in all operating conditions in both summer and winter.

Contents PU Part-No.

1 l	6	4650	¹⁴
1 l	6	9637	¹
20 l	1	4651	¹⁵
60 l	1	4652	¹⁵
200 l	1	4653	¹⁵



megol Hypoid-Getriebeoel GL 5 SAE 85W-140

Multi-grade hypoid gearbox oil with the highest stability and oxidation resistance whose EP additives provide a constant film of lubricant and prevent wear even under the highest load and high slipability of the tooth flanks. Mainly used for heavy-loaded hypoid gearboxes under extreme operating conditions, in particular when dynamic loads occur. The ideal gearbox oil for rear-axle compensation and differential gears.

20 l	1	4891	¹⁵
60 l	1	4871	¹⁵
200 l	1	4872	¹⁵



megol Hypoid-Getriebeoel GL 5 SAE 85W-90 LS

High quality hypoid motor vehicle gearbox oil for very high duty, which was especially developed for use in vehicles with limited-slip differentials. It contains special additives which, alongside excellent EP properties, endow it with the ability to change the coefficient of friction between the clutch disks to such an extent that it prevents the stick-slip effect and the resultant vibration. It thus meets the special requirements of all renowned automotive manufacturers of limited-slip differentials.

20 l	1	4654	¹⁵
60 l	1	4655	¹⁵
200 l	1	4873	¹⁵



megol Hypoid-Getriebeoel Axle LS 85W-90

A high-quality hypoid gear oil which has been developed for use under the extreme conditions which are encountered especially in vehicles with limited slip differential. It contains special additives, which in addition to outstanding EP properties also mean that the oil is capable of altering the frictional coefficient between the clutch plates in such a way as to prevent stick-slip and its consequential judder. The product therefore satisfies the special requirements of all reputable motor vehicle manufacturers for limited slip differentials.

20 l 1 7016 ¹⁵



megol Hypoid-Getriebeoel GL 5 SAE 75W-140 LS

Fully synthetic gearbox oil with LS-additive (LS = limited slip) for use in motor vehicles, preferably BMW's with locked axle systems and in axles, manual gearboxes and auxiliary drives with extended oil-change intervals in commercial vehicles. Megol Hypoid-Getriebeoel GL 5 SAE 75W-140 LS is suited for a wide temperature range because of the adjusted SAE-class.

1 l 6 3536 ¹⁴

TDL

20 l	1	4834	¹⁵
60 l	1	4835	¹⁵
200 l	1	4836	¹⁵


megol Hypoid-Getriebeoel TDL SAE 75W-90 (teilsynthetisch)

Semi-synthetic multi-grade gearbox oil for universal use. It satisfies practically all the requirements that modern commercial vehicles, in particular, place on lubricants for the entire power train. A TDL (total drive line) gearbox oil, it is ideal for lubricating all drive elements, from heavy duty synchronised and non-synchronised manual gearboxes to hypoidmeshed axle drives. By reducing the varieties and eliminating the risk of confusion it makes a significant contribution to rationalisation in a modern motor pool. Reducing friction by its perfect viscosity setting helps to increase fuel economy.

20 l	1	4831	¹⁵
60 l	1	4832	¹⁵
200 l	1	4833	¹⁵


megol Hypoid-Getriebeoel TDL SAE 80W-90

Multi-grade gearbox oil for universal use. It satisfies practically all the requirements that modern commercial vehicles, in particular, place on lubricants for the entire power train. As TDL (total drive line) gearbox oil, it is ideal for lubricating all drive elements, from heavy duty synchronised and non-synchronised manual gearboxes to hypoid-meshed axle drives. By reducing the varieties and eliminating the risk of confusion it makes a significant contribution to rationalisation in a modern motor pool. Reducing friction by its perfect viscosity setting helps to increase fuel economy.

20 l	1	8626	¹⁵
60 l	1	8627	¹⁵
200 l	1	8628	¹⁵


megol Getriebeoel Truck-Synth SAE 75W-90

Fully synthetic multi grade low friction gearbox oil. According to manufacturer recommendations, this gear oil is to be used all over the year in all gear boxes, in particular manual transmissions, hypoid gearboxes, transaxle-systems and any side-gears. To be TDL-Gear oil (total drive line) all lubrication requirements of modern commercial vehicles for the total power transmissions system will be satisfied. As result of its fully synthetic base oil, together with hightech additives, megol Getriebeoel Truck-Synth SAE 75W-90 guarantees excellent viscosity and temperature stability over long periods, essantie together with an increased low stability and wear reduction.

20 l	1	9433	¹⁴
60 l	1	9434	¹⁴
200 l	1	9451	¹⁵


megol Getriebeoel Power Transmission SAE 80W-90

Based on selected base oils and the latest additive technology which meets the current requirements of motor vehicle and transmission manufacturers. This new additive technology means that it can also be used in Mercedes-Benz vehicles with extended oil change intervals of up to 350,000 km.

Tractor oils**STOU-oil****megol Super Traktorenoel STOU SAE 10W-30**

Universal oil (STOU = Super Tractor Oil Universal) that has been specifically developed for agricultural machinery. It is ideal for agricultural machinery and combines the properties of an outstanding engine oil with the requirements of various tractor specifications for manual and axle gearboxes, hydraulic systems, turbo couplings and oil immersed brakes (wet brakes).

20 l	1	4760	15
60 l	1	4761	15
200 l	1	4762	15

megol Super Traktorenoel STOU SAE 10W-40

Universal oil (STOU = Super Tractor Oil Universal) that has been specifically developed for agricultural machinery. It is ideal for agricultural machinery and combines the properties of an outstanding engine oil with the requirements of various tractor specifications for manual and axle gearboxes, hydraulic systems, turbo couplings and oil immersed brakes (wet brakes).

20 l	1	9447	15
60 l	1	9448	15
200 l	1	9449	15

UTTO-oil**megol Traktorenoel UTTO Basic SAE 10W-30**

A sophisticated multi-purpose oil which is particularly suitable for forestry and agricultural machinery. It combines the requirements of modern combination drive systems (transmission and hydraulics) including wet brakes. It is therefore a wear-preventative, oxidation-stable special transmission and hydraulic oil with a multi-grade character.

20 l	1	3542	15
200 l	1	3544	15

megol Traktorenoel UTTO SAE 10W-30

Highly developed multi-purpose oil. Specially developed for forestry and agricultural machinery. Meets the requirements of modern combined drive systems (transmission and hydraulic) including wet brakes, making it a special transmission/hydraulic oil with multipurpose characteristics that offers wear protection and is stable to oxidation. Follow the manufacturer's instructions!

20 l	1	4782	15
60 l	1	4783	15
200 l	1	4784	15

STOU / UTTO-oil**megol Traktorenoel Universal STOU/UTTO**

Universal oil that has been specially developed for agricultural machinery. It combines the properties of an outstanding engine oil and requirements of various tractor specifications for gearbox and axle transmissions, hydraulic systems, turbo couplings and submersible brakes (wet brakes), all ideally tailored to the needs of agricultural machinery. A true all-round oil for agricultural operations which meets the most important requirements for STOU and UTTO.

20 l	1	6529	15
60 l	1	8629	15
200 l	1	8630	15

Hydraulic oils
HVLP

Meguin Hydrauliköl HVLP ...

Hydraulic oil with anti-aging, anti-corrosion, anti-foam and anti-wear additives as well as outstanding viscosity temperature behavior. Particularly recommended for hydraulic systems which are subject to wide fluctuations in temperature. Particularly for all types of construction machinery such as Poclain, Jumbo and Atlas excavators.

**Meguin Hydrauliköl
HVLP 32**

20 l	1	6381	¹⁵
60 l	1	8632	¹⁵
200 l	1	6392	¹⁵

**Meguin Hydrauliköl
HVLP 46**

20 l	1	4671	¹⁵
60 l	1	6382	¹⁵
200 l	1	6424	¹⁵

**Meguin Hydrauliköl
HVLP 68**

20 l	1	8633	¹⁵
60 l	1	6319	¹⁵
200 l	1	8634	¹⁵

HVL PD

Meguin Hydrauliköl HVL PD 46

Hydraulic oil with anti-aging, anti-corrosion, anti-foam and anti-wear additives, detergent additives as well as outstanding viscosity temperature behavior. Absorbs certain quantities of water without turbidity due to its special additives without having a negative effect on other properties. Particularly recommended for hydraulic systems which are subjected to large temperature fluctuations and the onset of condensation water. Applies especially to all types of construction machinery such as Poclain, Jumbo and Atlas excavators.

TO-4 Gear – Hydraulic

megol Getriebe-Hydrauliköl TO-4 SAE 10W

High performance hydraulic / transmission oils for building machinery especially developed to meet today's highest demands and those expected in the future. They guarantee excellent compatibility of gear components and friction linings, where engine oils are overstretched. The optimal adaptation of the formulation provides higher transmission performance and longer life of the clutches thanks to specifically set coefficient of friction characteristics and excellent wear protection. Hydraulic / transmission oils TO-4 are destined for use in high-loaded gear components of building machinery such as in power shift gears, side drives, axle drives and wet brakes. Wet brake chatter is eliminated.

**megol Getriebe-Hydrauliköl
TO-4 SAE 30**

20 l	1	6342	¹⁵
200 l	1	4380	¹⁵

**megol Getriebe-Hydrauliköl
TO-4 SAE 50**

20 l	1	4608	¹⁵
200 l	1	6309	¹⁵

Further items**Central hydraulic oil****megol Zentralhydrauliköl**

Special, synthetic and mineral oil-based hydraulic oil with ash-free additives to improve its viscosity, coefficient of friction, wear protection, oxidation protection, foaming and corrosion protection properties. megol Zentralhydrauliköl offers an ideal capacity for use as a central hydraulic oil in power steering and level control systems, hydraulic brake boosters and hydro-pneumatic suspension systems. megol Zentralhydraulik – öel's special formulation guarantees an excellent cold behaviour and is therefore particularly suited for use in cold countries. The instructions issued by the manufacturers are to be followed.

Contents PU Part-No.

1 l	6	6304	¹⁶
20 l	1	8641	¹⁵
60 l	1	8642	¹⁵

Rust film remover**Meguin Flugrostentferner**

Removes aggressive airborne rust residue from painted surfaces reliably and easily. Benefits: Not aggressive to metals and paints, prevents time-consuming and expensive paintwork repairs, helps to maintain the value of the vehicle.

1 l	6	8481	¹⁶
20 l	1	8482	¹⁶

Multipurpose grease**Meguin Mehrzweckfett L...**

Particularly suitable for the lubrication of normally stressed roller and plain bearings which operate at normal to high rotational speeds, also used under dusty and damp conditions. Its long shelf life and operating time guarantee economical use in a wide range of applications.

Meguin Mehrzweckfett L2

400 g	20	4770	¹⁴
400 g	20	9028	¹⁴
1 kg	4	4774	¹⁵
5 kg	1	4771	¹⁵
15 kg	1	6482	¹⁵
25 kg	1	4773	¹⁵
50 kg	1	4775	¹⁵
180 kg	1	4863	¹⁵

Meguin Mehrzweckfett L1

180 kg	1	3136	¹⁵
--------	---	------	---------------

Fluid grease**Meguin Fließfett L00**

Particularly suitable for the lubrication of normally stressed roller and plain bearings which operate at low to moderate rotational speeds, also used under dusty and damp conditions. Specially recommended for use in central lubrication systems on commercial vehicles.

5 kg	1	4690	¹⁵
15 kg	1	6503	¹⁵
25 kg	1	4692	¹⁵
50 kg	1	6673	¹⁵
180 kg	1	4864	¹⁵

Contents PU Part-No.

Further items
Lithium complex grease

400 g	20	8645	¹⁴
5 kg	1	8646	¹⁵
15 kg	1	8647	¹⁵
25 kg	1	8648	¹⁵
50 kg	1	8649	¹⁵
180 kg	1	8650	¹⁵


Meguin Lithium-Komplexfett LX2P

Particularly suitable for the long-term lubrication of roller and plain bearings at high temperatures and under extreme loads. Main areas of application in the automotive industry and heavy industry, for lubrication points with high bearing temperatures and high surface pressure.

Copper paste

400 g	20	6351	¹⁴
50 kg	1	8651	¹⁵
180 kg	1	6371	¹⁵


Meguin Kupferpaste

Particularly suitable for separation protection and protects against fusion and seizing of components under high thermal load such as exhaust, heat exchangers, boilers etc. Is used for damping noise and for repair in the entire disc brake and drum brake range. Makes disassembly easier.

Meguin Gleitoel CGLP ...

Lubricant with outstanding lubrication properties. Selected base oils combined with up-to-date additive technology guarantee the optimum anti-wear properties, prevent stick-slip and provide the highest level of adherence even under mixed friction conditions. Predominantly used as a machine tool oil, slideway oil and for lubricating heavy-duty reciprocating frame saws. It stands out in particular for its good demulsification capacity in relation to cooling lubricants.

Characteristic Data	approx. Values				
	CGLP 32	CGLP 46	CGLP 68	CGLP 100	CGLP 150
ISO-Viscosity class	DIN 51519	VG 32	VG 46	VG 68	VG 100
Viscosity at 40 °C	ASTM D 7042-04	32 mm ² /s	46 mm ² /s	68 mm ² /s	100 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	5,5 mm ² /s	7,2 mm ² /s	9,0 mm ² /s	11,7 mm ² /s
Viscosity index	DIN ISO 2909	108	117	107	105
Density at 15 °C	DIN 51757	0,875 g/cm ³	0,860 g/cm ³	0,865 g/cm ³	0,870 g/cm ³
Flash point	DIN ISO 2592	214 °C	216 °C	248 °C	250 °C
Pour point	DIN ISO 3016	- 24 °C	- 24 °C	- 21 °C	- 18 °C

Characteristic Data	approx. Values		
	CGLP 220	CGLP 320	CGLP 460
ISO-Viscosity class	DIN 51519	VG 220	VG 320
Viscosity at 40 °C	ASTM D 7042-04	220 mm ² /s	320 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	19,5 mm ² /s	24,5 mm ² /s
Viscosity index	DIN ISO 2909	100	98
Density at 15 °C	DIN 51757	0,895 g/cm ³	0,885 g/cm ³
Flash point	DIN ISO 2592	260 °C	260 °C
Pour point	DIN ISO 3016	- 18 °C	- 18 °C

Contents PU Part-No.

Meguin Gleitoel CGLP 32

20 l 1 2444 ¹⁵

Meguin Gleitoel CGLP 46

20 l 1 6396 ¹⁵

200 l 1 8652 ¹⁵

Meguin Gleitoel CGLP 68

20 l 1 6677 ¹⁵

200 l 1 6511 ¹⁵

Meguin Gleitoel CGLP 100

20 l 1 8653 ¹⁵

200 l 1 8654 ¹⁵

Meguin Gleitoel CGLP 150

20 l 1 8655 ¹⁵

200 l 1 8656 ¹⁵

Meguin Gleitoel CGLP 220

20 l 1 6535 ¹⁵

200 l 1 8657 ¹⁵

Meguin Gleitoel CGLP 320

20 l 1 8658 ¹⁵

200 l 1 8659 ¹⁵

Meguin Gleitoel CGLP 460

20 l 1 6495 ¹⁵

200 l 1 6391 ¹⁵

Contents PU Part-No.

Meguin Getriebeoel CLP 46

20 l	1	8662	¹⁵
200 l	1	8663	¹⁵

Meguin Getriebeoel CLP 68

20 l	1	4387	¹⁵
200 l	1	6372	¹⁵

Meguin Getriebeoel CLP 100

20 l	1	6496	¹⁵
200 l	1	6404	¹⁵

Meguin Getriebeoel CLP 150

20 l	1	6385	¹⁵
200 l	1	6406	¹⁵

Meguin Getriebeoel CLP 220

20 l	1	6409	¹⁵
200 l	1	6407	¹⁵

Meguin Getriebeoel CLP 320

20 l	1	6410	¹⁵
200 l	1	6489	¹⁵

Meguin Getriebeoel CLP 460

20 l	1	4629	¹⁵
200 l	1	6411	¹⁵

Meguin Getriebeoel CLP 680

20 l	1	4837	¹⁵
200 l	1	8664	¹⁵

Gear oils CLP mineral
Meguin Getriebeoel CLP ...

EP lubricant with outstanding lubrication and wear protection properties. Manufactured from high-quality base oils and the latest sulfur-phosphorus additives. Suitable for use in industrial transmissions and roller and plain bearings subjected to high pressures and, in particular, large-scale plants with circulation lubrication systems.

Characteristic Data	approx. Values				
	CLP 46	CLP 68	CLP 100	CLP 150	CLP 220
ISO-Viscosity class	DIN 51519	VG 46	VG 68	VG 100	VG 150
Viscosity at 40 °C	ASTM D 7042-04	46 mm ² /s	68 mm ² /s	100 mm ² /s	150 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	6,9 mm ² /s	8,8 mm ² /s	11,1 mm ² /s	15 mm ² /s
Viscosity index	DIN ISO 2909	105	102	95	100
Density at 15 °C	DIN 51757	0,870 g/cm ³	0,865 g/cm ³	0,870 g/cm ³	0,890 g/cm ³
Flash point	DIN ISO 2592	220 °C	226 °C	240 °C	246 °C
Pour point	DIN ISO 3016	- 30 °C	- 30 °C	- 24 °C	- 18 °C
					- 21 °C

Characteristic Data	approx. Values		
	CLP 320	CLP 460	CLP 680
ISO-Viscosity class	DIN 51519	VG 320	VG 460
Viscosity at 40 °C	ASTM D 7042-04	320 mm ² /s	460 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	24 mm ² /s	30,3 mm ² /s
Viscosity index	DIN ISO 2909	95	96
Density at 15 °C	DIN 51757	0,895 g/cm ³	0,900 g/cm ³
Flash point	DIN ISO 2592	244 °C	250 °C
Pour point	DIN ISO 3016	- 21 °C	- 18 °C
			- 15 °C

Gear oils CLP synthetic (PAO)

megol Gearoil Synth ISO VG ...

Fully synthetic EP lubricant with outstanding lubrication and wear protection properties. Manufactured from purely synthetic base oils (PAO/esters) using the latest additive technology based on sulfur-phosphorus agents. Suitable for use in industrial transmissions with high thermal and oxidative stability requirements, roller and plain bearings subjected to high pressures and, in particular, large-scale plants with circulation lubrication systems. Due to the high performance profile, the possible lubricant service life and the specific consumption, it is ideally suited for gear lubrication in wind turbines.

Characteristic Data		approx. Values	
		ISO VG 150	ISO VG 220
ISO-Viscosity class	DIN 51519	VG 150	VG 220
Viscosity at 40 °C	ASTM D 7042-04	156,3 mm ² /s	220 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	21,3 mm ² /s	27,7 mm ² /s
Viscosity index	DIN ISO 2909	161	162
Density at 15 °C	DIN 51757	0,855 g/cm ³	0,855 g/cm ³
Flash point	DIN ISO 2592	230 °C	235 °C
Pour point	DIN ISO 3016	- 42 °C	- 42 °C

Contents PU Part-No.

**megol Gearoil Synth
ISO VG 150**

20 l 1 9249 ¹⁵

**megol Gearoil Synth
ISO VG 220**

20 l 1 9252 ¹⁵
200 l 1 8666 ¹⁵

Gear oils CLPF

Meguin Getriebeoel CLPF 220

EP lubricant with outstanding lubrication properties. Manufactured from high-quality base oils, state-of-the-art sulfur-phosphorus additives and specially stabilized colloidal molybdenum disulfide. Suitable for use in industrial transmissions subjected to the highest pressures and, in particular, large scale plants with circulation lubrication systems.

Characteristic Data		approx. Values	
		VG 220	
ISO-Viscosity class	DIN 51519	VG 220	
Viscosity at 40 °C	ASTM D 7042-04	220 mm ² /s	
Viscosity at 100 °C	ASTM D 7042-04	18,7 mm ² /s	
Viscosity index	DIN ISO 2909	95	
Density at 15 °C	DIN 51757	0,895 g/cm ³	
Flash point	DIN ISO 2592	230 °C	
Pour point	DIN ISO 3016	- 21 °C	

200 l 1 8670 ¹⁵

Contents PU Part-No.

Meguin Hydrauliköl HLP 10

20 l	1	8675	¹⁵
60 l	1	8676	¹⁵
200 l	1	8677	¹⁵

Meguin Hydrauliköl HLP 15

20 l	1	8679	¹⁵
200 l	1	8681	¹⁵

Meguin Hydrauliköl HLP 22

20 l	1	4887	¹⁵
60 l	1	4851	¹⁵
200 l	1	4857	¹⁵

Meguin Hydrauliköl HLP 32

1 l	12	9010	¹⁶
5 l	4	9024	¹⁶
20 l	1	4660	¹⁵
60 l	1	4661	¹⁵
200 l	1	4858	¹⁵
IBC 1000 l	1	33001	¹⁵

Meguin Hydrauliköl HLP 46

1 l	12	33052	¹⁵
5 l	4	8685	¹⁶
20 l	1	4724	¹⁵
60 l	1	4874	¹⁵
200 l	1	4859	¹⁵

Meguin Hydrauliköl HLP 68

20 l	1	4662	¹⁵
60 l	1	4688	¹⁵
200 l	1	4860	¹⁵

Meguin Hydrauliköl HLP 100

20 l	1	6421	¹⁵
60 l	1	8688	¹⁵
200 l	1	6419	¹⁵

Meguin Hydrauliköl HLP 150

20 l	1	8690	¹⁵
200 l	1	6422	¹⁵

Hydraulic oils HLP
Meguin Hydrauliköl HLP ...

Mineral oil which is used as a pressure fluid in hydraulic systems. Contains agents for increasing the resistance to aging, corrosion protection and the EP properties. Thanks to the additives, meets all requirements and is predominantly used in hydraulic systems where there are high thermal stresses, where corrosion from water can take place and where the pumps or hydraulic motors require oils with wear protection properties where there is mixed friction due to the operating conditions.

Characteristic Data	approx. Values				
	HLP 10	HLP 15	HLP 22	HLP 32	HLP 46
ISO-Viscosity class	DIN 51519	VG 10	VG 22	VG 32	VG 46
Viscosity at 40 °C	ASTM D 7042-04	10 mm ² /s	15 mm ² /s	22 mm ² /s	32 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	2,7 mm ² /s	3,5 mm ² /s	4,4 mm ² /s	5,4 mm ² /s
Viscosity index	DIN ISO 2909	108	112	109	102
Density at 15 °C	DIN 51757	0,840 g/cm ³	0,845 g/cm ³	0,850 g/cm ³	0,875 g/cm ³
Flash point	DIN ISO 2592	168 °C	180 °C	210 °C	220 °C
Pour point	DIN ISO 3016	- 33 °C	- 30 °C	- 36 °C	- 30 °C

Characteristic Data	approx. Values		
	HLP 68	HLP 100	HLP 150
ISO-Viscosity class	DIN 51519	VG 68	VG 100
Viscosity at 40 °C	ASTM D 7042-04	68 mm ² /s	100 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	8,6 mm ² /s	11,1 mm ² /s
Viscosity index	DIN ISO 2909	97	95
Density at 15 °C	DIN 51757	0,885 g/cm ³	0,870 g/cm ³
Flash point	DIN ISO 2592	240 °C	260 °C
Pour point	DIN ISO 3016	- 27 °C	- 18 °C
			- 15 °C

Hydraulic oils HLP ... AF

Meguin Hydrauliköl HLP ... AF

Mineral oil which is used as a pressure fluid in hydraulic systems. Contains agents for increasing resistance to aging, corrosion protection and the EP properties. Thanks to the additives, meets all requirements and is predominantly used in hydraulic systems where there are high thermal stresses, where corrosion from water can take place and where the pumps or hydraulic motors require oils with wear protection properties where there is mixed friction due to the operating conditions. This product contains no ash-forming additives, meaning the formation of sticky deposits is avoided when oil is overheated.

Characteristic Data	approx. Values			
	HLP 10 AF	HLP 32 AF	HLP 46 AF	HLP 68 AF
ISO-Viscosity class	DIN 51519	VG 10	VG 32	VG 46
Viscosity at 40 °C	ASTM D 7042-04	10 mm ² /s	32 mm ² /s	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	2,7 mm ² /s	5,4 mm ² /s	6,75 mm ² /s
Viscosity index	DIN ISO 2909	108	102	100
Density at 15 °C	DIN 51757	0,840 g/cm ³	0,850 g/cm ³	0,865 g/cm ³
Flash point	DIN ISO 2592	160 °C	212 °C	220 °C
Pour point	DIN ISO 3016	- 33 °C	- 30 °C	- 30 °C

Contents PU Part-No.

Meguin Hydrauliköl HLP 10 AF

20 l	1	3129	15
200 l	1	3177	15

Meguin Hydrauliköl HLP 32 AF

20 l	1	8695	15
200 l	1	8696	15

Meguin Hydrauliköl HLP 46 AF

20 l	1	8697	15
200 l	1	6384	15

Meguin Hydrauliköl HLP 68 AF

20 l	1	6383	15
200 l	1	8698	15

Hydraulic oils HLPD

Meguin Hydrauliköl HLPD ...

Hydraulic oil with excellent EP properties and excellent aging and corrosion protection stability. Absorbs certain quantities of water without turbidity due to the special additives without affecting other properties. With optimally adjusted foaming behavior and air separation capacity. Especially suitable for hydraulic systems where condensation water is expected, such as machine tools, construction machinery, etc.

Characteristic Data	approx. Values				
	HLPD 10	HLPD 22	HLPD 32	HLPD 46	HLPD 68
ISO-Viscosity class	DIN 51519	VG 10	VG 22	VG 32	VG 46
Viscosity at 40 °C	ASTM D 7042-04	10 mm ² /s	22 mm ² /s	32 mm ² /s	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	2,7 mm ² /s	4,35 mm ² /s	5,4 mm ² /s	7 mm ² /s
Viscosity index	DIN ISO 2909	108	105	102	99
Density at 15 °C	DIN 51757	0,840 g/cm ³	0,850 g/cm ³	0,850 g/cm ³	0,865 g/cm ³
Flash point	DIN ISO 2592	156 °C	210 °C	220 °C	230 °C
Pour point	DIN ISO 3016	- 27	- 27 °C	- 27 °C	- 30 °C

Meguin Hydrauliköl HLPD 10

20 l	1	8701	15
200 l	1	6360	15

Meguin Hydrauliköl HLPD 22

20 l	1	8702	15
200 l	1	6500	15

Meguin Hydrauliköl HLPD 32

20 l	1	4663	15
200 l	1	4665	15

Meguin Hydrauliköl HLPD 46

20 l	1	4838	15
60 l	1	4666	15
200 l	1	4667	15

Meguin Hydrauliköl HLPD 68

20 l	1	4668	15
200 l	1	4670	15

Contents PU Part-No.

20 l	1	8704	¹⁵
200 l	1	8705	¹⁵

Hydraulic oils HLPD ... AF

Meguin Hydrauliköl HLPD 46 AF

Hydraulic oil with excellent EP properties and excellent aging and corrosion protection stability. Absorbs certain quantities of water without turbidity due to the special additives without affecting other properties. With optimally adjusted foaming behavior and air separation capacity. Especially suitable for hydraulic systems where condensation water is expected, such as machine tools, construction machinery, etc.

Characteristic Data	approx. Values	
	HLPD 46 AF	HLPD 68 AF
ISO-Viscosity class	DIN 51519	VG 46
Viscosity at 40 °C	ASTM D 7042-04	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	6,7 mm ² /s
Viscosity index	DIN ISO 2909	97
Density at 15 °C	DIN 51757	0,870 g/cm ³
Flash point	DIN ISO 2592	230 °C
Pour point	DIN ISO 3016	- 27 °C
		- 24 °C

Hydraulic oils HVLP

Meguin Hydrauliköl HVLP ...

Hydraulic oil with anti-aging, anti-corrosion, anti-foam and anti-wear additives as well as outstanding viscosity temperature behavior. Particularly recommended for hydraulic systems which are subject to wide fluctuations in temperature. Particularly for all types of construction machinery such as Poclain, Jumbo and Atlas excavators.

Characteristic Data	approx. Values		
	HVLP 32	HVLP 46	HVLP 68
ISO-Viscosity class	DIN 51519	VG 32	VG 46
Viscosity at 40 °C	ASTM D 7042-04	32 mm ² /s	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	6,7 mm ² /s	8,8 mm ² /s
Viscosity index	DIN ISO 2909	173	174
Density at 15 °C	DIN 51757	0,850 g/cm ³	0,860 g/cm ³
Flash point	DIN ISO 2592	200 °C	220 °C
Pour point	DIN ISO 3016	- 39 °C	- 39 °C

Meguin Hydrauliköl HVLP 32

20 l	1	6381	¹⁵
60 l	1	8632	¹⁵
200 l	1	6392	¹⁵

Meguin Hydrauliköl HVLP 46

20 l	1	4671	¹⁵
60 l	1	6382	¹⁵
200 l	1	6424	¹⁵

Meguin Hydrauliköl HVLP 68

20 l	1	8633	¹⁵
60 l	1	6319	¹⁵
200 l	1	8634	¹⁵

Hydraulic oils HVLP ... AF

Meguin Hydraulikoel HVLP 46 AF

Mineral oil-based, zinc-free multigrade hydraulic oil with excellent viscosity temperature behavior. Particularly suitable for hydraulic systems which are subject to wide fluctuations in temperature. Due to its anti-aging, anti-corrosion, anti-foaming and anti-wear additives, it is also particularly suitable for high-pressure hydraulics that are exposed to extreme loads and thus result in increased wear.

Characteristic Data		approx. Values
ISO-Viscosity class	DIN 51519	VG 46
Viscosity at 40 °C	ASTM D 7042-04	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	8,3 mm ² /s
Viscosity index	DIN ISO 2909	157
Density at 15 °C	DIN 51757	0,855 g/cm ³
Flash point	DIN ISO 2592	204 °C
Pour point	DIN ISO 3016	- 39 °C

Hydraulic oils HVL PD

Meguin Hydraulikoel HVL PD 46

Hydraulic oil with anti-aging, anti-corrosion, anti-foam and anti-wear additives, detergent additives as well as outstanding viscosity temperature behavior. Absorbs certain quantities of water without turbidity due to its special additives without having a negative effect on other properties. Particularly recommended for hydraulic systems which are subjected to large temperature fluctuations and the onset of condensation water. Applies especially to all types of construction machinery such as Poclain, Jumbo and Atlas excavators.

Characteristic Data		approx. Values
ISO-Viscosity class	DIN 51519	VG 46
Viscosity at 40 °C	ASTM D 7042-04	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	8,3 mm ² /s
Viscosity index	DIN ISO 2909	164
Density at 15 °C	DIN 51757	0,860 g/cm ³
Flash point	DIN ISO 2592	210 °C
Pour point	DIN ISO 3016	- 36 °C

Hydraulic oils native

Meguin Hydraulikoel HETG 37 (biolog. abbaubar)

Biodegradable hydraulic oil based on high quality synthetic esters. The product offers excellent viscosity-temperature properties. Thanks to its good low temperature properties, Meguin Hydraulikoel HETG 37 (biodegradable) can be used all year round. Its EP additives and polar adhesion capacity provide outstanding wear protection and very good protection against rust and corrosion. It is toxicologically safe and completely biodegradable. It is suitable for use in the hydraulic systems of equipment that is primarily used outdoors, such as mobile cranes and excavators for agricultural and forestry use, floating excavators, lock gate hydraulic systems, ski piste equipment, etc. where there is a risk of accidental leakage into the environment.

Characteristic Data		approx. Values
Viscosity at 40 °C	ASTM D 7042-04	37 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	8,4 mm ² /s
Viscosity index	DIN ISO 2909	215
Density at 15 °C	DIN 51757	0,920 g/cm ³
Flash point	DIN ISO 2592	280 °C
Pour point	DIN ISO 3016	- 39 °C

Contents PU Part-No.
200 l 1 3574 15

20 l	1	8714	15
60 l	1	8715	15
200 l	1	8716	15

20 l	1	6306	15
200 l	1	8718	15

Contents PU Part-No.

20 l	1	8719	¹⁵
200 l	1	8720	¹⁵

Hydraulic oils native

Meguin Hydraulikoel HEES 22 (biolog. abbaubar)

Biodegradable hydraulic fluid based on high-quality synthetic esters. Has excellent viscosity temperature behavior. Due to outstanding cold-weather properties, can be used year-round. EP additives and the polar adhesion provide very good protection against wear, rust and corrosion. Rapidly biodegradable and miscible with all mineral oil-based products. Mainly for hydraulic systems in equipment which primarily operates outside, is subjected to large fluctuations in temperature and where there is a risk of a high degree of pollution through oil leakage. Examples are mobile cranes and excavators in agriculture and forestry, floating dredgers, sluice hydraulic systems, snowcats, etc.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 22
Viscosity at 40 °C	ASTM D 7042-04 26 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 6,4 mm ² /s
Viscosity index	DIN ISO 2909 215
Density at 15 °C	DIN 51757 0,905 g/cm ³
Flash point	DIN ISO 2592 274 °C
Pour point	DIN ISO 3016 - 42 °C

20 l	1	8721	¹⁵
60 l	1	8722	¹⁵
200 l	1	8723	¹⁵

Meguin Hydraulikoel HEES 46 (biolog. abbaubar)

Biodegradable hydraulic fluid based on high-quality synthetic esters. Has excellent viscosity temperature behavior. Due to outstanding cold-weather properties, can be used year-round. EP additives and the polar adhesion provide very good protection against wear, rust and corrosion. Rapidly biodegradable and miscible with all mineral oil-based products. Mainly for hydraulic systems in equipment which primarily operates outside, is subjected to large fluctuations in temperature and where there is a risk of a high degree of pollution through oil leakage. Examples are mobile cranes and excavators in agriculture and forestry, floating dredgers, sluice hydraulic systems, snowcats, etc.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 46
Viscosity at 40 °C	ASTM D 7042-04 46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 9,4 mm ² /s
Viscosity index	DIN ISO 2909 194
Density at 15 °C	DIN 51757 0,920 g/cm ³
Flash point	DIN ISO 2592 280 °C
Pour point	DIN ISO 3016 - 45 °C


www.blauer-engel.de/uz178

MACHINE OILS

Lubricating oils

20 l	1	4610	¹⁵
200 l	1	6317	¹⁵

Meguin Schmieröel AN 46

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140 °C. Can also be used as non-oxidizing hardening oil (good quenching effect, water-repellent, salt-resistant) and as heat transfer oil (suitable for flow temperatures up to 320 °C).

20 l	1	8724	¹⁵
200 l	1	8725	¹⁵

Meguin Schmieröel AN 100

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140 °C. Can also be used as non-oxidizing hardening oil (aging-resistant, good quenching effect, water-repellent, salt-resistant) and as an aging-resistant heat transfer oil (suitable for flow temperatures up to 320 °C).

Characteristic Data	approx. Values	AN 46	AN 100
ISO-Viscosity class	DIN 51519 VG 46	VG 100	
Viscosity at 40 °C	ASTM D 7042-04 46 mm ² /s	100 mm ² /s	
Viscosity at 100 °C	ASTM D 7042-04 6,8 mm ² /s	11 mm ² /s	
Viscosity index	DIN ISO 2909 102	94	
Density at 15 °C	DIN 51757 0,860 g/cm ³	0,865 g/cm ³	
Flash point	DIN ISO 2592 224 °C	256 °C	
Pour point	DIN ISO 3016 - 30 °C	- 18 °C	

Spindle oils

Meguin Spindeloel N 10

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through and circulation lubrication systems. In metalworking also applicable as an excellent cutting and cooling oil for light to moderate machining procedures.

Characteristic Data	approx. Values	
ISO-Viscosity class	DIN 51519	VG 10
Viscosity at 40 °C	ASTM D 7042-04	10 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	2,7 mm ² /s
Viscosity index	DIN ISO 2909	108
Density at 15 °C	DIN 51757	0,840 g/cm ³
Flash point	DIN ISO 2592	160 °C
Pour point	DIN ISO 3016	- 24 °C

Contents PU Part-No.

200 l 1 8727 ¹⁵

COMPRESSOR OILS

Compressor oils VDL

Meguin Kompressorenöl VDL ...

High-quality, Type VDL DIN 51506 compressor oil. Manufactured from selected solvent-refined products and proven additives for excellent aging resistance. Suitable for use in all air compressors with compression final temperatures up to 220 °C.

Characteristic Data	approx. Values			
	VDL 46	VDL 68	VDL 100	VDL 150
ISO-Viscosity class	DIN 51519	VG 46	VG 68	VG 100
Viscosity at 40 °C	ASTM D 7042-04	46 mm ² /s	68 mm ² /s	100 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	6,8 mm ² /s	8,7 mm ² /s	11 mm ² /s
Viscosity index	DIN ISO 2909	102	99	94
Density at 15 °C	DIN 51757	0,880 g/cm ³	0,860 g/cm ³	0,865 g/cm ³
Flash point	DIN ISO 2592	224 °C	210 °C	246 °C
Pour point	DIN ISO 3016	- 33 °C	- 30 °C	- 21 °C

Meguin Kompressorenöl VDL 46

20 l	1	6533	¹⁵
60 l	1	9382	¹⁵
200 l	1	6521	¹⁵

Meguin Kompressorenöl VDL 68

20 l	1	4630	¹⁵
60 l	1	9385	¹⁵
200 l	1	6435	¹⁵

Meguin Kompressorenöl VDL 100

20 l	1	6438	¹⁵
200 l	1	6436	¹⁵

Meguin Kompressorenöl VDL 150

20 l	1	6674	¹⁵
200 l	1	4405	¹⁵

Contents PU Part-No.

20 l	1	9446	¹⁵
200 l	1	9466	¹⁵

Compressor oils VDL synthetic

Meguin Spezial-Kompressorenoel VDL 68 HC

High-quality Type VDL compressor oil according to DIN 51506 on hydrocrack basis. Suitable for use in piston, screw and rotary vane compressors. Manufactured from selected base oils and low-ash additives. Ensures very low residue formation and excellent aging resistance. Has also proven to be excellent for use in gas compressors. For long oil service life, clean compressor interior and optimized economical use.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 68
Viscosity at 40 °C	DIN 51562 68 mm ² /s
Viscosity at 100 °C	DIN 51562 9,6 mm ² /s
Viscosity index	DIN ISO 2909 121
Density at 15 °C	DIN 51757 0,855 g/cm ³
Flash point	DIN ISO 2592 246 °C
Pour point	DIN ISO 3016 - 30 °C

TURBINE OILS

TDL mineral

Meguin Turbinenoel TDL 32

20 l	1	8733	¹⁵
200 l	1	8734	¹⁵

Meguin Turbinenoel TDL 46

20 l	1	8735	¹⁵
200 l	1	6433	¹⁵

Meguin Turbinenoel TDL ...

Mineral oil with active agents for more corrosion protection and higher aging resistance. For lubrication and/or control in stationary gas turbines, in steam turbines and in electrically driven or steam turbine-driven machines such as generators, compressors, pumps and transmissions.

Characteristic Data	approx. Values	TDL 32	TDL 46
ISO-Viscosity class	DIN 51519 VG 32	VG 46	VG 46
Viscosity at 40 °C	ASTM D 7042-04 32 mm ² /s	46 mm ² /s	46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 5,4 mm ² /s	6,9 mm ² /s	6,9 mm ² /s
Viscosity index	DIN ISO 2909 102	105	105
Density at 15 °C	DIN 51757 0,870 g/cm ³	0,875 g/cm ³	0,875 g/cm ³
Flash point	DIN ISO 2592 215 °C	220 °C	220 °C
Pour point	DIN ISO 3016 - 30 °C	- 33 °C	- 33 °C

CHAIN SAW OILS

Chain saw oils dark

1 l	6	33054	¹⁶
5 l	4	4785	¹⁶
20 l	1	4763	¹⁵
60 l	1	4764	¹⁵
200 l	1	8737	¹⁵

Meguin Sägekettenoel 100

Lubricant with special adhesive additive and anti-wear additives. Used for once-through loss lubrication when normal lubricating oils are spun off by vibrations or rotation (such as with motorized chain saws, reciprocating saws, etc.).

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 100
Viscosity at 40 °C	ASTM D 7042-04 100 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 13,2 mm ² /s
Viscosity index	DIN ISO 2909 130
Density at 15 °C	DIN 51757 0,870 g/cm ³
Flash point	DIN ISO 2592 220 °C
Pour point	DIN ISO 3016 - 39 °C

Chain saw oils renewable ressource based

Meguin Sägekettenoel BIO ...

Rapidly biodegradable lubricating oil based on high-quality vegetable oils. Can be used over a wide temperature range due to its excellent viscosity temperature behavior. Anti-wear additives in combination with special adhesive additives and the natural capacity for polar adherence of the vegetable-based base oils ensure excellent protection against wear and corrosion and prevent spin-off of the lubrication point. Toxicologically safe. Especially recommended for loss lubrication when normal lubricating oils are spun off by vibrations or rotation and there is a risk of the product being introduced into the environment. Typical areas of application include the lubrication of reciprocating saws and chain lubrication of motor saws.

Characteristic Data		approx. Values		
		BIO 68	BIO 100	BIO 150
ISO-Viscosity class	DIN 51519	VG 68	VG 100	VG 150
Viscosity at 40 °C	ASTM D 7042-04	68 mm ² /s	100 mm ² /s	150 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	15,9 mm ² /s	23 mm ² /s	35,5 mm ² /s
Viscosity index	DIN ISO 2909	250	261	281
Density at 15 °C	DIN 51757	0,920 g/cm ³	0,920 g/cm ³	0,920 g/cm ³
Flash point	DIN ISO 2592	316 °C	300 °C	300 °C
Pour point	DIN ISO 3016	- 36 °C	- 30 °C	- 24 °C

Contents PU Part-No.

Meguin Sägekettenoel BIO 68

20 l	1	4786	15
60 l	1	9359	15
200 l	1	8738	15

Meguin Sägekettenoel BIO 100

20 l	1	6889	15
60 l	1	9362	15
200 l	1	6480	15

Meguin Sägekettenoel BIO 150

20 l	1	6888	15
200 l	1	6481	15

Tacky oils CGL

Meguin Haftoel CGL ...

Lubricant with special adhesive additive and anti-wear additives. Used for once-through loss lubrication when normal lubricating oils are spun off by vibrations or rotation (such as with motorized chain saws, reciprocating saws, etc.).

Characteristic Data		approx. Values				
		CGL 100	CGL 150	CGL 220	CGL 320	CGL 460
ISO-Viscosity class	DIN 51519	VG 100	VG 150	VG 220	VG 320	VG 460
Viscosity at 40 °C	ASTM D 7042-04	100 mm ² /s	150 mm ² /s	220 mm ² /s	320 mm ² /s	460 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04	11,2 mm ² /s	14,7 mm ² /s	19 mm ² /s	24,6 mm ² /s	31 mm ² /s
Viscosity index	DIN ISO 2909	97	97	97	98	97
Density at 15 °C	DIN 51757	0,860 g/cm ³	0,870 g/cm ³	0,875 g/cm ³	0,895 g/cm ³	0,890 g/cm ³
Flash point	DIN ISO 2592	246 °C	260 °C	250 °C	256 °C	300 °C
Pour point	DIN ISO 3016	- 21 °C	- 15 °C	- 15 °C	- 12 °C	- 18 °C

Characteristic Data		approx. Values	
		CGL 680	
ISO-Viscosity class	DIN 51519	VG 680	
Viscosity at 40 °C	ASTM D 7042-04	680 mm ² /s	
Viscosity at 100 °C	ASTM D 7042-04	40 mm ² /s	
Viscosity index	DIN ISO 2909	97	
Density at 15 °C	DIN 51757	0,895 g/cm ³	
Flash point	DIN ISO 2592	260 °C	
Pour point	DIN ISO 3016	- 12 °C	

Meguin Haftoel CGL 100

20 l	1	8739	15
200 l	1	6303	15

Meguin Haftoel CGL 150

20 l	1	8740	15
200 l	1	8741	15

Meguin Haftoel CGL 220

20 l	1	8742	15
200 l	1	8743	15

Meguin Haftoel CGL 320

20 l	1	8744	15
200 l	1	8745	15

Meguin Haftoel CGL 460

200 l	1	7086	15
-------	---	------	----

Meguin Haftoel CGL 680

20 l	1	8746	15
200 l	1	8747	15

FORMWORK RELEASE OILS

Contents PU Part-No.

20 l 1 8748 ¹⁵

200 l 1 8749 ¹⁵

20 l 1 8750 ¹⁵

200 l 1 6886 ¹⁵

20 l 1 8751 ¹⁵

200 l 1 6676 ¹⁵

Meguin Schaloel Spezial FS 7

Highly effective, non-emulsifying forming oil. For use in undiluted form for metal and timber formwork in the concrete products and precast stone industry as well as for prestressed concrete production. Apply by spraying or smearing. Formwork can either be coated just before concreting or a few days beforehand. Guarantees clean and easy demolding, good curing, smooth surfaces with sharp profiled edges and is economic to use.

Characteristic Data		approx. Values
Viscosity at 40 °C	ASTM D 7042-04	7,3 mm ² /s
Density at 15 °C	DIN 51757	0,830 g/cm ³
Flash point	DIN ISO 2592	120 °C
Neutralization number	DIN 51558 T1	6,9 mgKOH/g

Meguin Schaloel FSE 4

Low-viscosity, non-emulsifying concrete release agent for timber, chipboard and steel formwork. Apply a uniform thin layer to formwork by spraying or smearing. Guarantees clean and easy demolding, smooth surfaces with sharp profiled edges and is economic to use.

Characteristic Data		approx. Values
Viscosity at 40 °C	ASTM D 7042-04	4,6 mm ² /s
Density at 15 °C	DIN 51757	0,820 g/cm ³
Flash point	DIN ISO 2592	142 °C

Meguin Schaloel (wasserlöslich)

Emulsifiable demolding oil. Mainly used in construction engineering and underground construction as well as in the concrete products industry and mainly in the use of timber formwork. To be used on metal formwork only if a component is not demolded immediately but left to cure in the mold in a vapor bath. For new or little used shuttering boards we recommend as the concentration for use a mixing ratio of 1 part oil to 10 parts water. 1 part oil to 20 parts water is sufficient for well-used shuttering boards which are thoroughly soaked with oil. Mixing of the emulsion is achieved by stirring in the oil in a batch of the mixing water. The emulsion is applied by smearing or spraying as soon as possible before concreting. Enables clean and easy demolding, good curing, smooth surfaces and is economic to use.

Characteristic Data		approx. Values
Density at 15 °C	DIN 51757	0,895 g/cm ³
Flash point	DIN ISO 2592	160 °C
pH-value		6,1

ASPHALT AND CONCRETE RELEASE AGENT

Meguin Trennoel WT01 S

Biodegradable universal mold release agent with outstanding non-stick properties.

Used for separating asphalt:

Apply thinly but all over onto the dry and clean surface with a spray device (nozzle tip holder or high-performance sprayers), rubber wiper, brush or cloth. Remove excess with a rubber scraper or cloth. Ready for use, must not be diluted with water.

Use as a cleaning agent:

Thanks to its environmental compatibility, also particularly suitable for the cleaning and care of construction machinery and equipment. To keep the equipment clean, spray or apply daily before use. This largely prevents the asphalt or mortar from sticking and makes removal much easier.

Use as forming oil:

For absorbent and non-absorbent formwork made of wood, steel and plastic. Surfaces must be clean and dry to avoid contamination of the material surfaces. Does not reduce the absorbency of the demolded concrete surface, so that subsequent coatings (e.g. plaster) can be applied with normal substrate preparations. Observe the manufacturer's instructions for the coating material.

Characteristic Data		approx. Values
Colour/Appearance		yellow
Density at 15 °C	DIN 51757	0,905 g/cm ³
Viscosity at 20 °C	ASTM D 7042-04	29,3 mm ² /s
Viscosity at 40 °C	ASTM D 7042-04	15,8 mm ² /s
Operating temperature range		- 15 °C to + 95 °C

Meguin Schmieröl AN 46

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140°C. Can also be used as non-oxidizing hardening oil (good quenching effect, water-repellent, salt-resistant) and as heat transfer oil (suitable for flow temperatures up to 320°C).

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 46
Viscosity at 40 °C	ASTM D 7042-04 46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 6,8 mm ² /s
Viscosity index	DIN ISO 2909 102
Density at 15 °C	DIN 51757 0,860 g/cm ³
Flash point	DIN ISO 2592 224 °C
Pour point	DIN ISO 3016 - 30 °C

Contents	PU	Part-No.	
20 l	1	4610	¹⁵
200 l	1	6317	¹⁵

WHITE OILS

Meguin Weißöl PP 20 DAB 10

Medically pure, free of taste and smell white oil in accordance with the German Pharmacopoeia DAB 10. Mainly used in the cosmetic and pharmaceutical sector, in the food industry, in medical technology and in agriculture.

Characteristic Data	approx. Values
Viscosity at 40 °C	ASTM D 7042-04 15,5 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 3,5 mm ² /s
Viscosity index	DIN ISO 2909 103
Density at 15 °C	DIN 51757 0,850 g/cm ³
Flash point	DIN ISO 2592 185 °C
Pour point	DIN ISO 3016 - 15 °C

Contents	PU	Part-No.	
20 l	1	6346	¹⁵
200 l	1	8752	¹⁵

RUST PROOVING OILS

Solvent-free rust proving oils without graphite

Meguin Rostschutz-Sprühöl ohne Graphit

Thin mineral oil with corrosion protection additive that atomises quickly and easily. It penetrates all metal gaps and folds extremely well and spreads over the base of the treated vehicle. The film that forms is not aggressive towards rubber parts and noiseinsulating bitumen compounds. Its special additives protect the metal parts against rust and also act as an anti-squeal fluid between chafing metal parts and leaf springs.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 7
Viscosity at 40 °C	ASTM D 7042-04 9,1 mm ² /s
Density at 15 °C	DIN 51757 0,830 g/cm ³
Flash point	DIN ISO 2592 150 °C
Pour point	DIN ISO 3016 - 30 °C

Contents	PU	Part-No.	
20 l	1	8753	¹⁵
60 l	1	9341	¹⁵
200 l	1	8754	¹⁵

Solvent-free rust proving oils with graphite

Meguin Rostschutz-Sprühöl mit Graphit

Thin mineral oil with corrosion protection additive that atomises quickly and easily. It penetrates all metal gaps and folds extremely well and spreads over the base of the treated vehicle. The film that forms is not aggressive towards rubber parts and noiseinsulating bitumen compounds. Its special additives protect the metal parts against rust and also act as an anti-squeal fluid between chafing metal parts and leaf springs. This effect is enhanced even further by the graphite in the oil which reduces friction.

Contents	PU	Part-No.	
20 l	1	8755	¹⁵

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 7
Viscosity at 40 °C	ASTM D 7042-04 8,9 mm ² /s
Density at 15 °C	DIN 51757 0,830 g/cm ³
Flash point	DIN ISO 2592 150 °C
Pour point	DIN ISO 3016 - 30 °C

CORROSION PROTECTION OILS

Contents	PU	Part-No.
20 l	1	9240 ¹⁶

Meguin Korrosionsschutz 6M

Corrosion inhibitor with dewatering effect. For the preservation of metal parts intended for intermediate storage of up to half a year when stored indoors. Offers good anti-corrosion properties in thin layers and the resulting high spreading rate. Can be easily removed even after half a year of storage. Excellent for use in machining with water-miscible cooling lubricants.

Characteristic Data	approx. Values
Viscosity at 20 °C	DIN 51562 1,8 mm ² /s
Density at 20 °C	DIN 51757 0,800 g/cm ³
Flash point	DIN EN ISO 2719 at least 56 °C
Corrosion protection	DIN 50017 - KFW under a roof max. 12 months generally max. 6 months

TRANSFORMER OILS

20 l	1	8757 ¹⁵
208 l	1	8758 ¹⁵

Meguin Transformatorenöl J 10

Non-inhibited insulating oil for transformers, converters, switches, rectifiers, capacitors, etc. Among other things, its function as a dielectric is to prevent flashovers between live parts, to extinguish arcs in switches and to dissipate any heat loss that occurs. Characterized by high resistance to oxidation, good cooling capacity, high purity, low dielectric loss factor and high flash point.

Characteristic Data	approx. Values
Viscosity at 40 °C	ASTM D 7042-04 10 mm ² /s
Density at 15 °C	DIN 51757 0,875 g/cm ³
Flash point	DIN ISO 2592 150 °C
Pour point	DIN ISO 3016 - 48 °C

STEAM CYLINDER OIL

200 l	1	8762 ¹⁵
-------	---	--------------------

Meguin Heißdampf Zylinderoel ZB 1000

Pure mineral oil primarily used to lubricate the sliding parts of steam engines that are in contact with steam and whose steam temperatures do not exceed 325 °C. Also suitable as a high viscosity lubricating oil for lubrication points with feed-through lubrication systems.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 1000
Viscosity at 40 °C	ASTM D 7042-04 1000 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 53 mm ² /s
Viscosity index	DIN ISO 2909 100
Density at 15 °C	DIN 51757 0,900 g/cm ³
Flash point	DIN ISO 2592 280 °C
Pour point	DIN ISO 3016 - 12 °C

GAS ENGINE OILS

20 l	1	8703 ¹⁵
200 l	1	8763 ¹⁵

megol Gasmotorenöl Synth SAE 40

Fully synthetic gas motor oil based on polyalphaolefins and low-ash active agents. Prevents oil-related deposits in the combustion chambers to the greatest possible extent and allows extended oil change intervals. Can be used for high-load gas engines in natural gas, sewage gas and landfill gas operation with and without catalytic converter equipment.

Characteristic Data	approx. Values
SAE class (engine oils)	SAE J300 10W-40
Viscosity at 40 °C	ASTM D 7042-04 88 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 13,3 mm ² /s
Viscosity index	DIN ISO 2909 152
Density at 15 °C	DIN 51757 0,850 g/cm ³
Flash point	DIN ISO 2592 254 °C
Pour point	DIN ISO 3016 - 36 °C

megol Gasmotorenöl High Performance SAE 40

Gas motor oil with increased ash content and distinct quality reserve. For a wide range of applications. Offers good wear and corrosion protection, high acid neutralization capacity as well as excellent oxidation and temperature stability thanks to selected base oils and the specially developed additive package. Ideally suited for operation with natural gas, sewage gas and landfill gas. Achieves very good operating results when using biogas due to its increased acid neutralization capacity. Also suitable for dual operation with liquid and gaseous fuels.

Characteristic Data	approx. Values
SAE class (engine oils)	SAE J300
Viscosity at 40 °C	ASTM D 7042-04
Viscosity at 100 °C	ASTM D 7042-04
Viscosity index	DIN ISO 2909
Density at 15 °C	DIN 51757
Flash point	DIN ISO 2592
Pour point	DIN ISO 3016

megol Gasmotorenöl LA SAE 40

Gas motor oil based on selected base oils and low-ash active agents. Prevents oil-related deposits in the combustion chambers to the greatest possible extent. Can be used for gas engines in biogas, natural gas, sewage gas and landfill gas operation with and without catalytic converter equipment.

Characteristic Data	approx. Values
SAE class (engine oils)	SAE J300
Viscosity at 40 °C	ASTM D 7042-04
Viscosity at 100 °C	ASTM D 7042-04
Viscosity index	DIN ISO 2909
Density at 15 °C	DIN 51757
Flash point	DIN ISO 2592
Pour point	DIN ISO 3016

Contents	PU	Part-No.
200 l	1	8711 ¹⁵

20 l	1	8708 ¹⁵
200 l	1	8709 ¹⁵

HEAT TRANSFER OILS

Meguin Schmieröel AN 46

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140°C. Can also be used as non-oxidizing hardening oil (good quenching effect, water-repellent, salt-resistant) and as heat transfer oil (suitable for flow temperatures up to 320°C).

20 l	1	4610 ¹⁵
200 l	1	6317 ¹⁵

Meguin Schmieröel AN 100

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140°C. Can also be used as non-oxidizing hardening oil (aging-resistant, good quenching effect, water-repellent, salt-resistant) and as an aging-resistant heat transfer oil (suitable for flow temperatures up to 320°C).

20 l	1	8724 ¹⁵
200 l	1	8725 ¹⁵

Characteristic Data	approx. Values
	AN 46
ISO-Viscosity class	DIN 51519
Viscosity at 40 °C	ASTM D 7042-04
Viscosity at 100 °C	ASTM D 7042-04
Viscosity index	DIN ISO 2909
Density at 15 °C	DIN 51757
Flash point	DIN ISO 2592
Pour point	DIN ISO 3016
	AN 100
ISO-Viscosity class	VG 46
Viscosity at 40 °C	46 mm ² /s
Viscosity at 100 °C	6,8 mm ² /s
Viscosity index	102
Density at 15 °C	0,860 g/cm ³
Flash point	224 °C
Pour point	- 30 °C
	VG 100
Viscosity at 40 °C	100 mm ² /s
Viscosity at 100 °C	11 mm ² /s
Viscosity index	94
Density at 15 °C	0,865 g/cm ³
Flash point	256 °C
Pour point	- 18 °C

Contents PU Part-No.

20 l	1	8773	¹⁵
60 l	1	9332	¹⁵
200 l	1	8774	¹⁵

General machining

Meguin Schneidoel SLP 22

Chlorine-free, water-immiscible multipurpose cutting oil. Universally applicable for simple to medium requirements in machining.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 22
Viscosity at 40 °C	ASTM D 7042-04 22 mm ² /s
Density at 15 °C	DIN 51757 0,850 g/cm ³
Flash point	DIN ISO 2592 210 °C
Pour point	DIN ISO 3016 - 21 °C

Non-ferrous metals

Meguin Schneidoel SLP 32

Chlorine-free, water-immiscible multipurpose cutting oil. Universally applicable for simple to medium requirements in machining.

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 32
Viscosity at 40 °C	ASTM D 7042-04 32 mm ² /s
Density at 15 °C	DIN 51757 0,855 g/cm ³
Flash point	DIN ISO 2592 210 °C
Pour point	DIN ISO 3016 - 21 °C

High performance chipping

 208 l 1 9284 ¹⁵

Meguin Cutting Oil V15

Cooling lubricant containing mineral oil, water-immiscible. Consisting of solvent refined, low-aromatic mineral oil fractions, modified greasy oils and anti-wear additives containing sulfur. Provides excellent protection against corrosion, is stable to aging and does not tend to oil mist and foaming. Excellent for machining free-cutting steels and aluminum alloys as well as for machining unalloyed and alloyed case-hardened, Q & T and structural steels. Machining operations on cast materials and demanding gear cutting work, including gear grinding, can be carried out without any problems. Enables excellent surface qualities and long tool edge life.

Characteristic Data	approx. Values
Colour/Appearance	yellow
Viscosity at 40 °C	ASTM D 7042-04 16,5 mm ² /s
Density at 15 °C	DIN 51757 0,855 g/cm ³

Hardening oils mineral

 20 l 1 4610 ¹⁵
 200 l 1 6317 ¹⁵

Meguin Schmieroel AN 46

Aging-resistant mineral oil without added agents. Predominantly for lubrication points with once-through or circulation lubrications systems and as compressor oil for air compressors with compression final temperatures up to 140 °C. Can also be used as non-oxidizing hardening oil (good quenching effect, water-repellent, salt-resistant) and as heat transfer oil (suitable for flow temperatures up to 320 °C).

Characteristic Data	approx. Values
ISO-Viscosity class	DIN 51519 VG 46
Viscosity at 40 °C	ASTM D 7042-04 46 mm ² /s
Viscosity at 100 °C	ASTM D 7042-04 6,8 mm ² /s
Viscosity index	DIN ISO 2909 102
Density at 15 °C	DIN 51757 0,860 g/cm ³
Flash point	DIN ISO 2592 224 °C
Pour point	DIN ISO 3016 - 30 °C

Calcium greases

Sealing and separation greases

Meguin Dicht- und Trennfett C2

Can be used as a normal lubricating grease as well as a sealing and separating grease on sewage pipes, hydrants and spray booths. Anywhere that a very good resistance to cold and warm water must be guaranteed, e.g. also for water screw conveyors or in sewage treatment plants.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	K2G-30
Thickener	Ca	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	32 mm ² /s
Operating temperature range		- 30 to + 100 °C
Colour/Appearance		natural colored
NLGI class	DIN 51818	2
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	150 °C

Contents PU Part-No.

15 kg	1	8785	15
25 kg	1	8786	15
180 kg	1	8788	15

Meguin Schmierfett C2 (rot)

Can be used as a normal lubricating grease as well as a sealing and separating grease on sewage pipes, hydrants and spray booths. Anywhere that a very good resistance to cold and warm water must be guaranteed, e.g. also for water screw conveyors or in sewage treatment plants.

5 kg	1	9404	15
25 kg	1	8789	15
180 kg	1	8791	15

Longlife greases

Meguin Langzeitfett C2LP

Particularly suitable for the lubrication of highly loaded roller and plain bearings, especially in damp conditions. Due to its extremely adhesive lubricating film and water-repellent effect, it is particularly suitable for machines and vehicles in the construction industry and agriculture.

400 g	20	6684	14
400 g	20	33009	14 A
15 kg	1	8792	15
25 kg	1	8793	15
50 kg	1	8794	15
180 kg	1	8795	15

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KP2G-30
Thickener	Ca	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	800 mm ² /s
Operating temperature range		- 30 to + 110 °C
Colour/Appearance		green
NLGI class	DIN 51818	2
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	150 °C

Anticorrosion greases

Meguin Schmierfett C2S

Seawater repellent lubricating grease with excellent rust and corrosion protection properties. Can be used on external parts of ships, in industry, trade and agriculture for lubrication and protection of machines, joints, wire cables, etc. exposed to water contact.

25 kg 1 8796 15

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KPF2G-20
Thickener	Ca	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	100 mm ² /s
Operating temperature range		- 20 to + 100 °C
Colour/Appearance		off-white
NLGI class	DIN 51818	2
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 140 °C

Contents PU Part-No.

Lithium-greases/-complex greases
Multipurpose greases

5 kg	1	9422	¹⁵
15 kg	1	9459	¹⁵
25 kg	1	9460	¹⁵
180 kg	1	9462	¹⁵

Meguin Mehrzweckfett BIO 2

Suitable for the lubrication of normally stressed roller and plain bearings with normal to average speeds. To be used in areas in which environmental hazards are to be expected, e.g. in agriculture and forestry, well construction, the construction industry and sewage and water management.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KE2E-20
Thickener		Ca
Base oil		vegetable oil
Viscosity at 40 °C	ASTM D 7042-04	36 mm ² /s
Operating temperature range		- 20 to + 80 °C, up to + 110 °C briefly
Colour/Appearance		natural colored
NLGI class	DIN 51818	2
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 145 °C

Meguin Mehrzweckfett L1

180 kg	1	3136	¹⁵
--------	---	------	---------------

Meguin Mehrzweckfett L...

Particularly suitable for the lubrication of normally stressed roller and plain bearings which operate at normal to high rotational speeds, also used under dusty and damp conditions. Its long shelf life and operating time guarantee economical use in a wide range of applications.

Characteristic Data		approx. Values	
		L1	L2
Abbreviated designation to DIN	DIN 51502	KIK-30	K2K-20
Thickener		Li	Li
Base oil		mineral oil	mineral oil
Viscosity at 40 °C	ASTM D 7042-04	100 mm ² /s	100 mm ² /s
Operating temperature range		- 30 to + 120 °C, up to + 130 °C briefly	- 25 to + 120 °C, up to + 130 °C briefly
Colour/Appearance		natural colored	natural colored
NLGI class	DIN 51818	1	2
Fulling penetration	DIN ISO 2137	320 - 340 1/10 mm	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	185 °C	185 °C
		L3	
			K3N-25
			mineral oil
			120 mm ² /s
			- 25 to + 140 °C
			natural colored
			3
			220 - 250 1/10 mm
			190 °C

Meguin Mehrzweckfett L3

5 kg	1	6493	¹⁵
15 kg	1	8798	¹⁵
25 kg	1	6444	¹⁵
50 kg	1	6660	¹⁵
180 kg	1	4623	¹⁵

Multipurpose greases with dry film lubricant
Meguin Mehrzweckfett L2FI00

Particularly suitable for the lubrication of normally stressed roller and plain bearings which operate at low to normal rotational speeds, also used under dusty and damp conditions. Improves the emergency running properties due to its solid lubricant content.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KF2K-30
Thickener		Li
Base oil		mineral oil
Viscosity at 40 °C	ASTM D 7042-04	110 mm ² /s
Operating temperature range		- 30 to + 120 °C, up to + 130 °C briefly
Colour/Appearance		black
NLGI class	DIN 51818	2
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 180 °C

Lithium-greases/-complex greases

Antifriction bearing greases with EP-additives

Meguin Wälzlagerfett LP...

Particularly suitable for the lubrication of roller and plain bearings under difficult conditions and high pressures as well as under dusty and damp conditions. Its long shelf life and operating time guarantee economical use in a wide range of applications.

Characteristic Data		approx. Values		
		LP1	LP2	LP3
Abbreviated designation to DIN	DIN 51502	KP1K-30	KP2K-30	KP3K-30
Thickener	Li	Li	Li	Li
Base oil	mineral oil	mineral oil	mineral oil	mineral oil
Viscosity at 40 °C	ASTM D 7042-04	195 mm ² /s	160 mm ² /s	195 mm ² /s
Operating temperature range		- 30 to + 130 °C, up to + 140 °C briefly	- 30 to + 120 °C, up to + 130 °C briefly	- 30 to + 130 °C, up to + 140 °C briefly
Colour/Appearance		natural colored	natural colored	natural colored
NLGI class	DIN 51818	1	2	3
Fulling penetration	DIN ISO 2137	310 - 340 1/10 mm	265 - 295 1/10 mm	220 - 250 1/10 mm
Dropping point	DIN ISO 2176	190 °C	175 °C	190 °C

Contents PU Part-No.

Meguin Wälzlagerfett LP1

25 kg	1	8426	¹⁵
50 kg	1	6445	¹⁵
180 kg	1	6506	¹⁵

Meguin Wälzlagerfett LP2

400 g	20	4769	¹⁴
400 g	20	9029	^{14 A}
5 kg	1	4766	¹⁵
15 kg	1	8427	¹⁵
25 kg	1	4768	¹⁵
50 kg	1	4776	¹⁵
180 kg	1	6446	¹⁵

Meguin Wälzlagerfett LP3

400 g	20	8799	¹⁴
15 kg	1	9409	¹⁵
25 kg	1	8428	¹⁵
50 kg	1	6368	¹⁵

Antifriction bearing greases with EP-additives/dry film lubricant

Meguin Wälzlagerfett LF2

Particularly suitable for the lubrication of roller and plain bearings which operate at normal to high rotational speeds, also used under dusty and damp operating conditions. Contains solid lubricants to improve the pressure absorption capacity and emergency running properties.

Characteristic Data		approx. Values	
Abbreviated designation to DIN	DIN 51502	KPF2K-30	
Thickener	Li		
Base oil	mineral oil		
Viscosity at 40 °C	ASTM D 7042-04	110 mm ² /s	
Operating temperature range		- 30 to + 130 °C	
Colour/Appearance		black	
NLGI class	DIN 51818	2	
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm	
Dropping point	DIN ISO 2176	> 180 °C	

400 g	20	6448	¹⁴
15 kg	1	4621	¹⁵
25 kg	1	8430	¹⁵
50 kg	1	6368	¹⁵
180 kg	1	6357	¹⁵

Meguin Wälzlagerfett LP2F200+

Specially developed for use in roller bearings under high load which operate at normal to high rotational speeds. Due to the high proportions of solid lubricants and EP additives, it is also very good to use in plain and roller bearings in the most extreme conditions.

Characteristic Data		approx. Values	
Abbreviated designation to DIN	DIN 51502	KPF2K-30	
Thickener	Li		
Base oil	mineral oil		
Viscosity at 40 °C	ASTM D 7042-04	110 mm ² /s	
Operating temperature range		- 30 to + 130 °C	
Colour/Appearance		black	
NLGI class	DIN 51818	2	
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm	
Dropping point	DIN ISO 2176	> 180 °C	

15 kg	1	9411	¹⁵
25 kg	1	8431	¹⁵

1 kg 4 8415 ^{7*}
Lithium-greases/-complex greases
Antifriction bearing greases without EP-additives/dry film lubricant
Meguin Wälzlagerfett K3N-20 blau

Is resistant to ageing and provides good protection against corrosion and wear.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	K3N-20
Thickener	Li	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	100 mm ² /s
Temperature range		- 20 to + 140 °C
NLGI class	DIN 51818	3
Falling penetration	DIN ISO 2137	220 - 250 1/10 mm
Dropping point	DIN ISO 2176	190 °C

Longlife greases

400 g	20	6453	¹⁴
400 g	20	9030	¹⁴
5 kg	1	6498	¹⁵
15 kg	1	6672	¹⁵
25 kg	1	6379	¹⁵
50 kg	1	6452	¹⁵
180 kg	1	6451	¹⁵

Meguin Langzeitfett LP2L

Especially for the lubrication of highly stressed roller and plain bearings under difficult operating conditions and for the extension of the lubrication intervals. Due to its extremely adhesive lubricating film, it is particularly suitable for machines and vehicles in the construction industry and agriculture.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KP2K-30
Thickener	Li	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	150 mm ² /s
Operating temperature range		- 30 to + 130 °C
Colour/Appearance		natural colored
NLGI class	DIN 51818	2
Falling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 185 °C

Heavy duty greases

400 g	20	8434	¹⁴
25 kg	1	6450	¹⁵

Meguin Schwerlastfett

Specially developed for use in roller bearings in heavy industry (e.g. mining) which are subject to heavy loads with low to normal engine speeds, even in humid and dusty conditions. Thanks to its solid lubricants, EP and adhesive additives, also very good to use in plain and roller bearings in the most extreme conditions.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KPF2N-20
Thickener	Li	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	400 mm ² /s
Operating temperature range		- 20 to + 140 °C
Colour/Appearance		black
NLGI class	DIN 51818	2
Falling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 260 °C

Universal shaft greases

180 kg	1	8436	¹⁵
--------	---	------	---------------

Meguin Schmierfett LP2F200

Specially developed for use in high-load, constant velocity joints. Due to its solid lubricants it is highly suitable for use in plain and roller bearings. Suitable for lifetime lubrication of both plunging and fixed joints.

Characteristic Data		approx. Values
Abbreviated designation to DIN	DIN 51502	KPF2K-30
Thickener	Li	
Base oil	mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	110 mm ² /s
Operating temperature range		- 30 to + 130 °C
Colour/Appearance		black
NLGI class	DIN 51818	2
Falling penetration	DIN ISO 2137	265 - 295 1/10 mm
Dropping point	DIN ISO 2176	> 180 °C

*not available in Germany and Austria

⁷ D – GB – F – ARAB – HR – RUS – GR ¹⁴ D – GB – F – HR – RUS – GR ¹⁵ D – GB

Lithium-greases/-complex greases

Fluid greases

Meguin Fließfett L00

Particularly suitable for the lubrication of normally stressed roller and plain bearings which operate at low to moderate rotational speeds, also used under dusty and damp conditions. Specially recommended for use in central lubrication systems on commercial vehicles.

Characteristic Data	approx. Values
Abbreviated designation to DIN DIN 51502	K00/000K-40
Thickener	Li
Base oil	mineral oil
Viscosity at 40 °C ASTM D 7042-04	45 mm²/s
Operating temperature range	- 40 to + 120 °C
Colour/Appearance	natural colored
NLGI class DIN 51818	00/000
Fulling penetration DIN ISO 2137	400 - 460 1/10 mm
Dropping point DIN ISO 2176	165 °C

Meguin Getriebefließfett LP...

Particularly suitable for the lubrication of normally stressed transmissions and gear couplings which operate at low to normal rotational speeds, also used under dusty and damp conditions. Can be used in transmissions in which a semi-liquid lubricant is particularly effective.

Characteristic Data	approx. Values
LPOO	LPO
Abbreviated designation to DIN DIN 51502	GPOOK-30
Thickener	Li
Base oil	mineral oil
Viscosity at 40 °C ASTM D 7042-04	200 mm²/s
Operating temperature range	- 30 to + 120 °C
Colour/Appearance	natural colored
NLGI class DIN 51818	00
Fulling penetration DIN ISO 2137	400 - 430 1/10 mm
Dropping point DIN ISO 2176	175 °C
	> 160 °C

High-temperature greases

Meguin Lithium-Komplexfett LX2P

Particularly suitable for the long-term lubrication of roller and plain bearings at high temperatures and under extreme loads. Main areas of application in the automotive industry and heavy industry, for lubrication points with high bearing temperatures and high surface pressure.

Characteristic Data	approx. Values
Abbreviated designation to DIN DIN 51502	KPN-30
Thickener	Li-complex
Base oil	mineral oil
Viscosity at 40 °C ASTM D 7042-04	210 mm²/s
Operating temperature range	- 30 to + 140 °C, up to + 180 °C briefly
Colour/Appearance	blue
NLGI class DIN 51818	2
Fulling penetration DIN ISO 2137	265 - 295 1/10 mm
Dropping point DIN ISO 2176	> 260 °C

Meguin Getriebefließfett LP00

400 g	20	9036	¹⁶
5 kg	1	8438	¹⁵
15 kg	1	8439	¹⁵
25 kg	1	8440	¹⁵
180 kg	1	8442	¹⁵

Meguin Getriebefließfett LP0

50 kg	1	3137	¹⁵
180 kg	1	3138	¹⁵

400 g	20	8645	¹⁴
5 kg	1	8646	¹⁵
15 kg	1	8647	¹⁵
25 kg	1	8648	¹⁵
50 kg	1	8649	¹⁵
180 kg	1	8650	¹⁵

Sodium greases

Fluid greases

Meguin Getriebefließfett NP00

5 kg	1	6318	¹⁴
25 kg	1	8452	¹⁵
180 kg	1	8454	¹⁵

Meguin Getriebefließfett NPO

15 kg	1	8456	¹⁵
25 kg	1	8457	¹⁵

Meguin Getriebefließfett NP...

Particularly suitable for the lubrication of closed rolling gears and drum motors at low loads. Its good adhesion is particularly effective for fast moving transmissions and geared motors.

Characteristic Data		approx. Values	
		NPOO	NPO
Abbreviated designation to DIN	DIN 51502	GP00/000H-30	GPOH-30
Thickener	Na	Na	Na
Base oil	mineral oil	mineral oil	mineral oil
Viscosity at 40 °C	ASTM D 7042-04	130 mm ² /s	140 mm ² /s
Operating temperature range		- 30 to + 100 °C	- 30 to + 100 °C
Colour/Appearance		natural colored	natural colored
NLGI class	DIN 51818	00/000	0
Fulling penetration	DIN ISO 2137	425 - 455 1/10 mm	355 - 385 1/10 mm
Dropping point	DIN ISO 2176	> 140 °C	> 120 °C

Aluminium complex greases

Meguin Hochtemperaturfett ALX2

High-quality complex soap grease for the lubrication of roller and plain bearings at high temperatures and under normal loads. The main area of application is heavy industry, where lubrication points with high bearing temperatures occur.

Characteristic Data		approx. Values	
Abbreviated designation to DIN	DIN 51502	KP2N-20	
Thickener		Al-complex	
Base oil		mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	220 mm ² /s	
Operating temperature range		- 20 to + 150 °C, up to + 200 °C briefly	
Colour/Appearance		natural colored	
NLGI class	DIN 51818	2	
Fulling penetration	DIN ISO 2137	265 - 295 1/10 mm	
Dropping point	DIN ISO 2176	> 240 °C	

PASTES

Meguin Kupferpaste

Particularly suitable for separation protection and protects against fusion and seizing of components under high thermal load such as exhaust, heat exchangers, boilers etc. Is used for damping noise and for repair in the entire disc brake and drum brake range. Makes disassembly easier.

Characteristic Data		approx. Values	
Abbreviated designation to DIN	DIN 51502	KF2T-35	
Thickener		Bentonite	
Base oil		mineral oil	
Viscosity at 40 °C	ASTM D 7042-04	110 mm ² /s	
Operating temperature range		- 35 to + 1100 °C	
Colour/Appearance		copper colored	
NLGI class	DIN 51818	1/2	
Fulling penetration	DIN ISO 2137	300 1/10 mm	

400 g	20	6351	¹⁴
50 kg	1	8651	¹⁵
180 kg	1	6371	¹⁵

Oil-Additives

Contents PU Part-No.



Meguin Oil Safe

Rejuvenates rubber and plastic engine seals and reduces oil consumption via the piston rings and valve guides; counteracts the loss in viscosity of motor oils. Stop the polluting oil stains on the street and in the garage. For all gasoline and diesel engines: Compatible with all commercially available motor oils. Not suitable for use on motorbikes with wet clutches! Application: One 250 ml can of Oil Safe is sufficient for 3.5 litres of motor oil. The product can be added at any time. After adding, run the engine until warm. Sealing first takes effect after about 800 km. To guarantee a lasting effect, add Oil Safe after each oil change.

250 ml 12 6557 11*



Meguin Motor Safe

Multifunctional high performance additive for reducing friction and wear and stabilizing viscosity. It protects engine oil against viscosity loss even under the harshest conditions and protects the engine against wear. Motor Safe is based on the latest additive technology and is compatible with all synthetic and mineral engine oils. For all gasoline and diesel engines in new and used cars. Application: One 250 ml can of Motor Safe is sufficient for max. 6 litres engine oil. After adding to the engine oil, allow the engine to run warm. The product can be added at any time.

250 ml 12 6558 11*



Meguin Hydraulic Lifter Additive

High performance additive that damp the noise generation of contaminated and sticky hydraulic tappets. Cleans valve bores and thus ensures optimal functioning again. For all gasoline and diesel engines. Can be mixed with all commercially available engine oils. Note: Not suitable for motorbikes with wet clutches! Application: One 250 ml can is sufficient for up to 5 litres motor oil. The product can be added at any time. After adding run the engine until warm. For a lasting effect, Hydraulic Lifter Additive must be added after each oil change.

250 ml 12 6559 11*



Meguin Visco Safe

Modern, mono-functional high-performance additive for stabilizing the viscosity of motor oils. Visco Safe offers outstanding protection against mechanical and therefore permanent shear losses to the oil under extreme running conditions and is effective against the thinning of motor oils due to frequent cold starts. For all passenger vehicles and commercial vehicles, gasoline and diesel engines in new and used vehicles. Not suitable for use on motorbikes with wet clutches! Application: Can contents (250ml) are sufficient for 4 litres of motor oil. After adding to the motor oil, allow the engine to run warm. The product can be added at any time.

250 ml 12 6555 11*



Meguin Motor Flush

Flushes out and cleans the engine from the inside. Highly effective cleaning additives dissolve sludge and lacquer formers, envelop solid dirt particles and liquid contaminants. These substances are then drained along with the motor oil during the oil change. Engines stripped of deposits and contaminants then can unfold their full performance when clean oil is filled. For cleaning and flushing out the oil circuits of gasoline and diesel engines. The use of Motor Flush is dependent on the degree of contamination of the oil circuit. Can be safely used in vehicles with toothed belt running in oil. Not suitable for use in motorbikes with wet clutches. Application: A 250 ml can is sufficient for up to 3.5 liters of oil. Add Motor Flush to the motor oil at running temperature before changing the oil. After it has been added, let the engine idle for 10 – 15 minutes. Then change the oil and the filter. Motor Flush is compatible with all commercially available motor oils. (Not available for order in Germany)

250 ml 12 6556 11*

250 ml	12	6552	^{3*}
50 l	1	8493	^{15*}
195 l	1	1892	^{15*}



Meguin Carburetor Cleaner

Modern, ash-free combination of additives with cleaning and dispersing properties which protects the carburetor components. The Product has been formulated using state-of-the-art additive and fuel technologies in accordance with the requirements of today's engines, fuels and running conditions. Used as an additive for the fuel of all 2-stroke and 4-stroke petrol engines, especially for motor vehicle engines. Also used for small engines for ships and industry. For decommissioning and preserving engines, add Carburetor Cleaner to the petrol at the rate of 1%. Follow the instructions for decommissioning and preserving engines. Application: One 250 ml can is sufficient for 50 litres of fuel. Mix the contents of the can with fuel. Mixing takes place automatically. Add to the fuel every 2,000 km for long-term effect. The fuel tank should be at least half to completely full. For constant use, add to the fuel at the rate of 0.3 – 0.5%.

 250 ml 12 6550 ^{11*}


Meguin Fuel System Cleaner

Highly effective combination of active agents for cleaning and protection. This product is formulated in accordance with the latest standard of fuel and additive technology and meets the requirements of today's engines, fuels and running conditions. It is suitable for all gasoline fuel injection systems such as K-, KE- and L-Jetronic systems, etc. For rectifying problems such as difficulties with starting, irregular idling, poor throttle response, performance losses, surges due to lean mixture and poor exhaust values caused by contaminated injection systems. Repeat treatment if problems reoccur. It is suitable for all gasoline injection systems. Application: One 250 ml can is sufficient for up to 50 litres of fuel. This product is effective over 2000 km. Fuel System Cleaner can be mixed with fuel at any time since mixing is spontaneous.

 250 ml 12 9034 ^{11*}


Meguin Injection Cleaner

Highly effective combination of active agents for cleaning and protection. This product is formulated in accordance with the latest standard of fuel and additive technology and meets the requirements of today's engines, fuels and running conditions. It is suitable for all gasoline fuel injection systems such as K-, KE- and L-Jetronic systems, etc. For rectifying problems such as difficulties with starting, irregular idling, poor throttle response, performance losses, surges due to lean mixture and poor exhaust values caused by contaminated injection systems. Repeat treatment if problems reoccur. It is suitable for all gasoline injection systems. Application: One 250ml can is sufficient for up to 50 litres of fuel. This product is effective over 2000 km. Injection Cleaner can be mixed with fuel at any time since mixing is spontaneous.

 150 ml 20 6577 ^{6*}


Meguin Octane Booster

For universal use and increases the research octane number (RON) of the fuel by 2-4 points, depending on the fuel quality. The engine performance is optimized and engine damage caused by knocking combustion is prevented. Application: Mix with the fuel. The contents of one 150 ml can are sufficient for a maximum of 50 liters of gasoline. Note: Do not store the product at temperatures >39°C for extended periods!

Fuel Additives for Diesel

 50 l 1 6560 ^{15*}


Meguin Diesel Additiv

Mixture of agents with cleaning, dispersing, material-protection and cetanumber increasing properties which has been formulated for today's engines, fuels and running conditions. The resulting additive-package provides better lubricity for diesel fuels low in sulphur. Due to the increased ignition performance, the fuel shows better combustion behaviour when the engine is cold and the pollution from odours in the exhaust is reduced. Instruction: To keep the injectors clean and for corrosion protection, Meguin Diesel Additive is added to the passenger vehicle diesel tank every 2000 km. When decommissioning and preserving engines, add Meguin Diesel Additive to the diesel fuel at the rate of 1%. Follow the instructions on preservation. It can be mixed with the fuel at any time since mixing takes place. Dosage rate: 1:300.

*not available in Germany and Austria

³ GB – D – F – HR – RUS ⁶D – GB – RUS ¹¹GB – D – F – RUS – ARAB ¹⁵D – GB

Fuel Additives for Diesel



Meguin Diesel System Cleaner

Contains a mixture of agents with cleaning, dispersing and materialprotection properties as well as cetane number enhancing properties and has been formulated for today's engines, fuels and running conditions. Added to the diesel fuel for all diesel engines in passenger and heavy goods vehicles, tractors, construction machinery and stationary engines. Ideally suitable for preserving engines when decommissioned for long period under extreme conditions. Application: Add Diesel System Cleaner to the fuel tank of the vehicle before filling with fuel. Sufficient for up to 50 litres of diesel fuel.

Contents PU Part-No.

250 ml	12	6551	^{11*}
250 ml	12	9690	^{2*}

250 ml 12 33025 ^{11*}



Meguin Diesel Smoke Stop Concentrate

Highly effective additive for diesel fuels. Reduces soot emissions from diesel engines through accelerated soot combustion, thus reducing unpleasant odors and impairment of visibility. Reduces the frequency of repair. Environmentally friendly. Suitable for all diesel engines. Pour the contents of the can into the tank before filling up with fuel. 250 ml sufficient to treat up to 200 l of diesel fuel.

Radiator Additives



Meguin Radiator Cleaner

A concentrate specially developed for cooling systems in general but particularly those in motor vehicles. Dissolves contaminations of limy and oil containing in radiators, heating systems, pipes and in engines. A modern formula that contains chelating agents with active cleaning agents. Suitable for all cooling water systems in motor vehicles, buses and commercial vehicles. Application: Add contents to the cooling water. Run the heating system. Allow the engine to the run for about 30 minutes at running temperature. Drain the cleaner and flush out the cooling system with water. Fill the cooling system according to the manufacturer's instructions. The content (250 ml) is sufficient for 10 litres of water.

250 ml 12 6553 ^{11*}
250 ml 12 9681 ^{2*}

250 ml 12 6554 ^{11*}
250 ml 12 9680 ^{2*}



Meguin Radiator Safe

Dispersion for sealing leaks in water-cooling systems in motor vehicles. The product reliably seals hair cracks and small leaks. The solids dispersion is stabilised in carrier fluid. Used for sealing small leaks in cooling circuits of passenger motor vehicles, commercial vehicles, busses and two-wheel vehicles. Also suitable for cooling circuit with filters. Application: Shake container before use. Run the heating system. With the engine running, pour the contents into the cooling fluid at operating temperature and allow the engine to continue running for a further 10 minutes. The content is sufficient for 10 litres of coolant.

SERVICE PRODUCTS

Contents PU Part-No.

1 l	12	8483	¹¹
5 l	1	4819	¹⁶
20 l	1	4892	¹⁶
60 l	1	4820	¹⁶

300 ml 12 8450 ^{11*}



Meguin Bremsenreiniger

Universal cleaner for rapid cleaning and degreasing of small components in the automotive and industrial sector. For brakes, clutches, transmissions, and for use in fitting and repair work. Removes oil and grease spots from floor coverings, materials and linings. Application: Spray contaminated components and allow to drain. After the solvent has evaporated, the parts are free of grease and clean.

400 ml 12 8447 ^{11*}



Meguin Rust Solvent

Loosens stiff, rusted screw connection quickly and reduces the friction as well as the effort when loosening. This considerably reduces the danger of damaging the threads or breaking off the screw connections. Meguin Rust Solvent was developed to help loosen all screw connections without problems or damage in industry and the workshop, on motor vehicles and on all household and hobby appliances, etc. Application: Generously spray the screw connections to be treated. Depending on the condition of the screw connection, briefly allow the Rust Solvent to take effect, repeating the procedure as needed, and carefully loosen the screw joint.

12.5 l 1 8479 ^{4*}



Meguin Multi-Purpose Spray

Lubricates moving parts, eliminates squeaking and enables permanent smooth running, loosens stiff, rusted screw connections and protects electrical components and contacts against oxidation. The liquid tool for thousands of possible applications, such as hinges, rollers, locks, Bowden cables, screw and plug-in connections, contacts etc., in the workshop and industry as well as in the household and garden and for hobbies. Application: Generously spray the surfaces or components to be treated. Depending on the application area, briefly allow to take effect and continue with the work as needed. Note: De-energize electrical components before treatment and do not create any sparks until the propellant volatilizes (approx. 10 minutes)

1 3335 *



Meguin Spender für Handreiniger flüssig

Red dosing dispenser.

*not available in Germany and Austria

⁴D – GB – F – HR – RUS ¹¹GB – D – F – RUS – ARAB ¹⁶D



Akkufett presse 18V mit Panzerschlauch

Rugged 18V battery grease press with filling/bleed valve for 400 g grease cartridges. A high-performance electric DC motor with planetary gear and crank gear creates a max. pressure of 400 bar that is limited by a pressure-relief valve.

Scope of delivery:

- Battery grease press, 18V Li-ION rechargeable battery, 1500 mAh, delivery rate: approx. 100 ccm/min
- Electronically controlled rapid charger with overcharge protection (1 h normal charge time)
- High-pressure reinforced rubber hose 750 mm (burst pressure 1650 bar) with 4-jaw hydraulic coupler R1/8
- Plastic case with room for a second rechargeable battery and for grease cartridges



Ersatzakku für Akkufett presse 18V

Powerful battery for cordless grease gun 18V.

- 18 V Li-ion battery/1500 mAh
- Charging time approx. 1 hour



Lube Shuttle Systemfett presse

Hand-lever grease gun (two-hand operation) for Lube-Shuttle® system cartridges, high-quality design with galvanized grease tank, ergonomically shaped handle and 300 mm safety reinforced rubber hose RH-30C (steel braid inserts, burst pressure 1650 bar, Ø 13 mm) with 4-jaw hydraulic coupler. Operating pressure over 400 bar, maximum pressure up to approx. 800 bar, TÜV, DLG, BLT tested.



Lube Shuttle Adapter (für Fuchs-Reiner-System)

Aluminum adapter for handling Lube Shuttle® screw-on cartridges in Fuchs grease guns.

Contents	PU	Part-No.
1 St.	1	3513

1 St. 1 33023

1 St. 1 3514

1 St. 1 3516



ADVERTISING MATERIAL

PU Part-No.

100	5454	D
100	5390	GB

20	5258	D
20	51686	GB
20	5860	RUS/HR
20	5861	ARAB/F
20	5210	NL/I
10	9381	E/P

300	8495	LT/LV/ GE/P/E/H
-----	------	--------------------

50	8496	LT/LV/ GE/P/E/H
----	------	--------------------

50	5540	D	
50	5708	RUS	
50	50541	F	
DV	50493	LV	
	50	50491	GB
DV	50494	UA	
DV	50492	ARAB	
250	50544	P	
DV	50543	E	
50	50639	I	

50	5968	D	
DV	50499	UA	
	50	50498	RUS
DV	50497	LV	
	50	50535	F
DV	50496	ARAB	
	50	50495	GB
DV	50545	E	
DV	50546	P	
50	50640	I	

50	5966	D
----	------	---

50	5967	D	
	50	8535	RUS
DV	50539	UA	
	50	50540	F
	50	50536	GB
DV	50538	LV	
	50	50537	ARAB
DV	50548	P	
DV	50547	E	
50	50638	I	

50	8533	RUS
DV	50550	E/P

Catalogues/Brochures

Image Brochure



Part-No.51686

Brochure Meguin additives



Part-No.5540

Brochure Meguin Service Products



Part-No.5966

Brochure Trucks



Part-No.50550

Brochure Greases

DV = Only printing data available!



Catalogues/Brochures



Part-No. 5882

Industrial Catalogue LM/Meguin

Meguin Brochure Separating Oil WT01

Information on Meguin Radiator Cleaner GB

Meguin innovations 2020 brochure D

PU Part-No.

20 5882 D/GB

DV 5827

DV 50797 GB

50 51728 D

Adhesive Label

Logo 10 x 4.25 cm

50 5889

Logo 16 x 7 cm

100 5237

Logo 30 x 13 cm

100 5229

Logo 48 x 20 cm

100 5291



Part-No. 51686

Outdoor Advertising

Flag 120 x 300 cm

1 5235

Banner 400 x 100 cm

1 5587



Part-No. 5587



Part-No. 5235



Part-No. 51245

**Meguin Beachflag upper part
400 x 100 cm**

1 51244


Meguin Beachflag lower part

1 51245

ADVERTISING MATERIAL

Miscellaneous

Annual Calendar

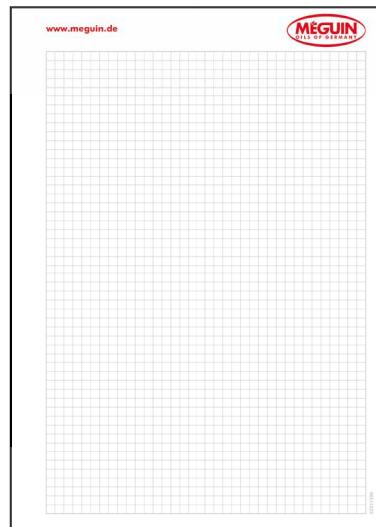

Part-No. 5239

Note Pad for Training DIN A4

Paper Cube

Ball Pen



Part-No. 5221

Table Pennant

Part-No. 5238

Oil Change Tag



Part-No. 5236

Workshop Clock




Part-No. 5246

Pin



Part-No. 5257

Cap

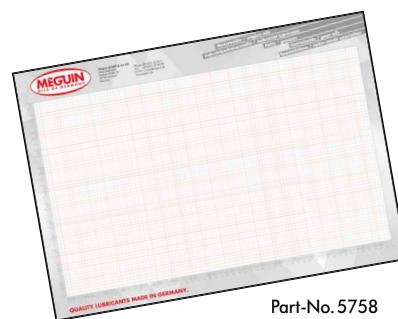

Part-No. 5758

Lighter



Part-No. 5240

Umbrella



Part-No. 5321

Desk pad



Part-No. 5759

Binder empty

Cup black

ADVERTISING MATERIAL



Displays/Advertising Boards



Futura Shop

Topper Futura Shop

Futura Shop 40 x 60 cm empty

Side sections for Futurashop (2 pieces)



Tego-metal-rack 65 cm

Topper Tego-metal-rack

Tego-metal-rack 66.5 cm empty

Tego-metal-rack 125 cm empty

Shelf rail FH white/insert 66.5 cm

Shelf rail FH white/insert 125 cm

Shelf strips

1 9937

1 9969

1 9988

12 9984

24 9990

100 9964

50 9991

10 9992

Advertising Board 74.5 x 60 cm

Illuminated counter sign



Part-No. 5866

1 5698

1 5866

T-Shirt red



Part-No. 5798

5 5798 S

5 5799 M

5 5800 L

5 5801 XL

5 5802 XXL



Part-No. 5698

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
1670	megol Motorenoel HD Super Turbo SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	10
1671	megol Motorenoel HD Super Turbo SAE 15W-40	20 l	1	D - GB	10
1672	megol Motorenoel HD Super Turbo SAE 15W-40	60 l	1	D - GB	10
1673	megol Motorenoel HD Super Turbo SAE 15W-40	200 l	1	D - GB	10
1674	megol Motorenoel SHPD SAE 15W-40	20 l	1	D - GB	11
1675	megol Motorenoel SHPD SAE 15W-40	60 l	1	D - GB	11
1676	megol Motorenoel SHPD SAE 15W-40	200 l	1	D - GB	11
1678	megol Motorenoel SHPD SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	11
1892	Meguin Carburetor Cleaner	195 l	1	D - GB	50
2444	Meguin Gleitoel CGLP 32	20 l	1	D - GB	27
2470	megol Getriebeoel ATF Smooth	200 l	1	D - GB	16
3129	Meguin Hydraulikoel HLP 10 AF	20 l	1	D - GB	31
3136	Meguin Mehrzweckfett L1	180 kg	1	D - GB	25
3136	Meguin Mehrzweckfett L1	180 kg	1	D - GB	44
3137	Meguin Getriebefließfett LPO	50 kg	1	D - GB	47
3138	Meguin Getriebefließfett LPO	180 kg	1	D - GB	47
3168	megol Getriebeoel ATF Smooth	20 l	1	D - GB	16
3171	megol Getriebeoel ATF Variable	20 l	1	D - GB	17
3172	megol Getriebeoel CVT Dynamik	20 l	1	D - GB	17
3177	Meguin Hydraulikoel HLP 10 AF	200 l	1	D - GB	31
3182	megol Motorenoel Mobility SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6
3185	megol Motorenoel Mobility SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
3187	megol Motorenoel Ecology SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6
3189	megol Motorenoel Ecology SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
3192	megol Motorenoel Surface Protection SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	7
3193	megol Motorenoel Surface Protection SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	7
3194	megol Motorenoel Efficiency SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6
3196	megol Motorenoel Efficiency SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
3198	megol Motorenoel High Condition SAE 5W-40	5 l	4	D - GB - F - RUS - GR - ARAB	8
3199	megol Motorenoel High Condition SAE 5W-40	1 l	12	D - GB - F - RUS - GR - ARAB	8
3335	Meguin Spender für Handreiniger flüssig		1		52
3513	Akkufettpresse 18V mit Panzerschlauch	1 St.	1		53
3514	Lube Shuttle Systemfettpresse	1 St.	1		53
3516	Lube Shuttle Adapter (für Fuchs-Reiner-System)	1 St.	1		53
3517	megol Super Performance SAE 10W-40 (teilsynthetisch)	4 l	4	D - NL - F - E - GB - ARAB	9
3529	megol Doppelkupplungsgtriebe Fluid	1 l	6	D - GB - F - RUS - GR - ARAB	17
3535	megol Hypoid-Getriebeoel GL 4 + SAE 75W-90	1 l	6	D - GB - F - HR - RUS - GR	19
3536	megol Hypoid-Getriebeoel GL 5 SAE 75W-140 LS	1 l	6	D - GB - F - HR - RUS - GR	21
3542	megol Traktorenoel UTTO Basic SAE 10W-30	20 l	1	D - GB	23
3544	megol Traktorenoel UTTO Basic SAE 10W-30	200 l	1	D - GB	23
3574	Meguin Hydraulikoel HVLP 46 AF	200 l	1	D - GB	33
4301	megol Motorenoel HD-C3 SG (Single-Grade) SAE 40	20 l	1	D - GB	14
4306	megol Motorenoel HD-C3 SG (Single-Grade) SAE 50	5 l	4	D - GB - F - HR - RUS - GR	14
4310	megol Motorenoel Synergetic SAE 10W-40	20 l	1	D - GB	13
4324	megol Motorenoel Performance TOP TRANS SAE 15W-40	20 l	1	D - GB	12
4338	megol Motorenoel Syntech Premium SAE 10W-40	5 l	4	D - GB - F - RUS - GR - ARAB	9
4339	megol Motorenoel Syntech Premium SAE 10W-40	1 l	12	D - GB - F - RUS - GR - ARAB	9
4340	megol Motorenoel Syntech Premium Diesel SAE 10W-40	1 l	12	D - GB - F - HR - RUS - GR	9
4353	megol Motorenoel RACER SAE 10W-60 (vollsynthetisch)	20 l	1	D - GB	15
4355	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	4 l	4	D - GB - F - HR - RUS - GR	8
4356	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	11

Part-No.	Description	Cont.	P.U.	Language	Page
4356	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	13
4358	megol Motorenoel Ultra Performance Longlife SAE 5W-40	60 l	1	D - GB	8
4359	megol Motorenoel Ultra Performance Longlife SAE 5W-40	20 l	1	D - GB	8
4361	megol Motorenoel Ultra Performance Longlife SAE 5W-40	1 l	12	D - GB - F - HR - RUS - GR	8
4364	megol Motorenoel Power Synt SAE 10W-40	4 l	4	D - GB - F - RUS - GR - ARAB	9
4365	megol Super Performance SAE 10W-40 (teilsynthetisch)	5 l	4	D - GB - F - HR - RUS - GR	9
4366	megol Super Performance SAE 10W-40 (teilsynthetisch)	1 l	12	D - GB - F - HR - RUS - GR	9
4372	megol Motorenoel HD Super Turbo SAE 15W-40	4 l	4	D - GB - F - HR - RUS - GR	10
4373	megol Motorenoel HD Super Turbo SAE 15W-40	1 l	12	D - GB - F - HR - RUS - GR	10
4374	megol Mehrzweckgetriebeoel GL 4 SAE 80W	20 l	1	D - GB	18
4378	megol Hypoid-Getriebeoel GL 5 SAE 140	200 l	1	D - GB	20
4380	megol Getriebe-Hydraulikoel TO-4 SAE 30	200 l	1	D - GB	24
4381	megol Motorenoel Universal SAE 20W-50	5 l	4	D - GB - F - HR - RUS - GR	10
4381	megol Motorenoel Universal SAE 20W-50	5 l	4	D - GB - F - HR - RUS - GR	13
4384	megol Motorenoel Universal SAE 20W-50	1 l	12	D - GB - F - HR - RUS - GR	10
4384	megol Motorenoel Universal SAE 20W-50	1 l	12	D - GB - F - HR - RUS - GR	13
4387	Meguin Getriebeoel CLP 68	20 l	1	D - GB	28
4405	Meguin Kompressorenöl VDL 150	200 l	1	D - GB	35
4608	megol Getriebe-Hydraulikoel TO-4 SAE 50	20 l	1	D - GB	24
4609	megol Motorenoel New Generation SAE 5W-30	60 l	1	D - GB	6
4610	Meguin Schmieroel AN 46	20 l	1	D - GB	34
4610	Meguin Schmieroel AN 46	20 l	1	D - GB	39
4610	Meguin Schmieroel AN 46	20 l	1	D - GB	41
4610	Meguin Schmieroel AN 46	20 l	1	D - GB	42
4621	Meguin Wälzlagerfett LF2	15 kg	1	D - GB	45
4623	Meguin Mehrzweckfett L3	180 kg	1	D - GB	44
4626	megol Motorenoel HD-C3 SG (Single-Grade) SAE 50	20 l	1	D - GB	14
4627	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	1 l	12	D - GB - F - HR - RUS - GR	10
4627	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	1 l	12	D - GB - F - HR - RUS - GR	13
4628	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	5 l	4	D - GB - F - HR - RUS - GR	10
4628	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	5 l	4	D - GB - F - HR - RUS - GR	13
4629	Meguin Getriebeoel CLP 460	20 l	1	D - GB	28
4630	Meguin Kompressorenöl VDL 68	20 l	1	D - GB	35
4632	megol Motorenoel HD-C3 SG (Single-Grade) SAE 50	200 l	1	D - GB	14
4637	megol Motorenoel Syntech Premium Diesel SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	9
4638	megol Motorenoel Syntech Premium Diesel SAE 10W-40	20 l	1	D - GB	9
4639	megol Motorenoel Syntech Premium Diesel SAE 10W-40	60 l	1	D - GB	9
4640	megol Motorenoel Syntech Premium Diesel SAE 10W-40	200 l	1	D - GB	9
4650	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)	1 l	6	D - GB - F - HR - RUS - GR	21
4651	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)	20 l	1	D - GB	21
4652	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)	60 l	1	D - GB	21
4653	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)	200 l	1	D - GB	21
4654	megol Hypoid-Getriebeoel GL 5 SAE 85W-90 LS	20 l	1	D - GB	21
4655	megol Hypoid-Getriebeoel GL 5 SAE 85W-90 LS	60 l	1	D - GB	21
4659	megol Transmission-Fluid ATF III (rot)	60 l	1	D - GB	16
4660	Meguin Hydraulikoel HLP 32	20 l	1	D - GB	30
4661	Meguin Hydraulikoel HLP 32	60 l	1	D - GB	30
4662	Meguin Hydraulikoel HLP 68	20 l	1	D - GB	30
4663	Meguin Hydraulikoel HLPD 32	20 l	1	D - GB	31
4665	Meguin Hydraulikoel HLPD 32	200 l	1	D - GB	31
4666	Meguin Hydraulikoel HLPD 46	60 l	1	D - GB	31

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
4667	Meguin Hydraulikoel HLPD 46	200 l	1	D - GB	31
4668	Meguin Hydraulikoel HLPD 68	20 l	1	D - GB	31
4670	Meguin Hydraulikoel HLPD 68	200 l	1	D - GB	31
4671	Meguin Hydraulikoel HVLP 46	20 l	1	D - GB	24
4671	Meguin Hydraulikoel HVLP 46	20 l	1	D - GB	32
4678	megol Motorenoel Universal SAE 15W-40	20 l	1	D - GB	9
4678	megol Motorenoel Universal SAE 15W-40	20 l	1	D - GB	13
4681	megol Motorenoel HD-C3 SG (Single-Grade) SAE 10W	20 l	1	D - GB	14
4682	megol Motorenoel HD-C3 SG (Single-Grade) SAE 10W	60 l	1	D - GB	14
4683	megol Motorenoel HD-C3 SG (Single-Grade) SAE 30	1 l	12	D - GB - F - HR - RUS - GR	14
4685	megol Motorenoel HD-C3 SG (Single-Grade) SAE 30	20 l	1	D - GB	14
4686	megol Motorenoel HD-C3 SG (Single-Grade) SAE 30	60 l	1	D - GB	14
4687	megol Motorenoel HD-C3 SG (Single-Grade) SAE 10W	200 l	1	D - GB	14
4688	Meguin Hydraulikoel HLP 68	60 l	1	D - GB	30
4689	megol Motorenoel Universal SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	9
4689	megol Motorenoel Universal SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	13
4690	Meguin Fließfett L00	5 kg	1	D - GB	25
4690	Meguin Fließfett L00	5 kg	1	D - GB	47
4692	Meguin Fließfett L00	25 kg	1	D - GB	25
4692	Meguin Fließfett L00	25 kg	1	D - GB	47
4693	megol Motorenoel Performance SHPD 15W-40	200 l	1	D - GB	12
4696	megol Motorenoel Universal SAE 15W-40	1 l	12	D - GB - F - HR - RUS - GR	9
4696	megol Motorenoel Universal SAE 15W-40	1 l	12	D - GB - F - HR - RUS - GR	13
4716	megol Motorenoel HD-C3 SAE 15W-40	200 l	1	D - GB	9
4716	megol Motorenoel HD-C3 SAE 15W-40	200 l	1	D - GB	13
4724	Meguin Hydraulikoel HLP 46	20 l	1	D - GB	30
4725	megol Motorenoel HD-C3 SAE 15W-40	60 l	1	D - GB	9
4725	megol Motorenoel HD-C3 SAE 15W-40	60 l	1	D - GB	13
4727	megol Motorenoel HD-C3 SAE 15W-40	20 l	1	D - GB	9
4727	megol Motorenoel HD-C3 SAE 15W-40	20 l	1	D - GB	13
4728	megol Motorenoel HD-C3 SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	9
4728	megol Motorenoel HD-C3 SAE 15W-40	5 l	4	D - GB - F - HR - RUS - GR	13
4729	megol Motorenoel HD-C3 SAE 15W-40	1 l	12	D - GB - F - HR - RUS - GR	9
4729	megol Motorenoel HD-C3 SAE 15W-40	1 l	12	D - GB - F - HR - RUS - GR	13
4760	megol Super Traktorenoel STOU SAE 10W-30	20 l	1	D - GB	23
4761	megol Super Traktorenoel STOU SAE 10W-30	60 l	1	D - GB	23
4762	megol Super Traktorenoel STOU SAE 10W-30	200 l	1	D - GB	23
4763	Meguin Sägekettenoel 100	20 l	1	D - GB	36
4764	Meguin Sägekettenoel 100	60 l	1	D - GB	36
4765	Meguin Mehrzweckfett L2F100	400 g	20	D - GB - F - HR - RUS - GR	44
4766	Meguin Wälzlagerfett LP2	5 kg	1	D - GB	45
4768	Meguin Wälzlagerfett LP2	25 kg	1	D - GB	45
4769	Meguin Wälzlagerfett LP2	400 g	20	D - GB - F - HR - RUS - GR	45
4770	Meguin Mehrzweckfett L2	400 g	20	D - GB - F - HR - RUS - GR	25
4770	Meguin Mehrzweckfett L2	400 g	20	D - GB - F - HR - RUS - GR	44
4771	Meguin Mehrzweckfett L2	5 kg	1	D - GB	25
4771	Meguin Mehrzweckfett L2	5 kg	1	D - GB	44
4773	Meguin Mehrzweckfett L2	25 kg	1	D - GB	25
4773	Meguin Mehrzweckfett L2	25 kg	1	D - GB	44
4774	Meguin Mehrzweckfett L2	1 kg	4	D - GB	25
4774	Meguin Mehrzweckfett L2	1 kg	4	D - GB	44

Part-No.	Description	Cont.	P.U.	Language	Page
4775	Meguin Mehrzweckfett L2	50 kg	1	D - GB	25
4775	Meguin Mehrzweckfett L2	50 kg	1	D - GB	44
4776	Meguin Wälzlagerfett LP2	50 kg	1	D - GB	45
4777	Meguin Mehrzweckfett L2F100	5 kg	1	D - GB	44
4779	Meguin Mehrzweckfett L2F100	25 kg	1	D - GB	44
4781	Meguin Mehrzweckfett L2F100	50 kg	1	D - GB	44
4782	megol Traktorenoel UTTO SAE 10W-30	20 l	1	D - GB	23
4783	megol Traktorenoel UTTO SAE 10W-30	60 l	1	D - GB	23
4784	megol Traktorenoel UTTO SAE 10W-30	200 l	1	D - GB	23
4785	Meguin Sägekettenoel 100	5 l	4	D	36
4786	Meguin Sägekettenoel BIO 68	20 l	1	D - GB	37
4797	megol Motorenoel Syntech Premium SAE 10W-40	20 l	1	D - GB	9
4798	megol Motorenoel Syntech Premium SAE 10W-40	60 l	1	D - GB	9
4799	megol Motorenoel Syntech Premium SAE 10W-40	200 l	1	D - GB	9
4800	megol Motorenoel Power Synt SAE 10W-40	5 l	4	D - GB - F - RUS - GR - ARAB	9
4804	megol Motorenoel Power Synt SAE 10W-40	1 l	12	D - GB - F - RUS - GR - ARAB	9
4805	megol Motorenoel Power Synt SAE 10W-40	20 l	1	D - GB	9
4806	megol Motorenoel Power Synt SAE 10W-40	60 l	1	D - GB	9
4807	megol Motorenoel Power Synt SAE 10W-40	200 l	1	D - GB	9
4808	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	1 l	12	D - GB - F - HR - RUS - GR	8
4809	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	5 l	4	D - GB - F - HR - RUS - GR	8
4810	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	20 l	1	D - GB	8
4811	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	60 l	1	D - GB	8
4812	megol Motorenoel Super Leichtlauf SAE 5W-40 (vollsynthetisch)	200 l	1	D - GB	8
4817	megol Motorenoel HD-C3 SG (Single-Grade) SAE 20W-20	20 l	1	D - GB	14
4818	megol Motorenoel HD-C3 SG (Single-Grade) SAE 20W-20	60 l	1	D - GB	14
4819	Meguin Bremsenreiniger	5 l	1	D	52
4820	Meguin Bremsenreiniger	60 l	1	D	52
4821	megol Mehrzweckgetriebeoel GL 4 SAE 80W-90	20 l	1	D - GB	19
4822	megol Mehrzweckgetriebeoel GL 4 SAE 80W-90	60 l	1	D - GB	19
4823	megol Mehrzweckgetriebeoel GL 4 SAE 80W-90	200 l	1	D - GB	19
4824	megol Mehrzweckgetriebeoel GL 4 SAE 75W-90	20 l	1	D - GB	19
4825	megol Mehrzweckgetriebeoel GL 4 SAE 75W-90	60 l	1	D - GB	19
4826	megol Mehrzweckgetriebeoel GL 4 SAE 75W-90	200 l	1	D - GB	19
4827	megol Hypoid-Getriebeoel GL 5 SAE 80W-90	20 l	1	D - GB	20
4829	megol Hypoid-Getriebeoel GL 5 SAE 80W-90	60 l	1	D - GB	20
4830	megol Hypoid-Getriebeoel GL 5 SAE 80W-90	200 l	1	D - GB	20
4831	megol Hypoid-Getriebeoel TDL SAE 80W-90	20 l	1	D - GB	22
4832	megol Hypoid-Getriebeoel TDL SAE 80W-90	60 l	1	D - GB	22
4833	megol Hypoid-Getriebeoel TDL SAE 80W-90	200 l	1	D - GB	22
4834	megol Hypoid-Getriebeoel TDL SAE 75W-90 (teilsynthetisch)	20 l	1	D - GB	22
4835	megol Hypoid-Getriebeoel TDL SAE 75W-90 (teilsynthetisch)	60 l	1	D - GB	22
4836	megol Hypoid-Getriebeoel TDL SAE 75W-90 (teilsynthetisch)	200 l	1	D - GB	22
4837	Meguin Getriebeoel CLP 680	20 l	1	D - GB	28
4838	Meguin Hydraulikoel HLPD 46	20 l	1	D - GB	31
4844	megol Motorenoel Universal SAE 15W-40	60 l	1	D - GB	9
4844	megol Motorenoel Universal SAE 15W-40	60 l	1	D - GB	13
4845	megol Motorenoel Universal SAE 15W-40	200 l	1	D - GB	9
4845	megol Motorenoel Universal SAE 15W-40	200 l	1	D - GB	13
4846	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	20 l	1	D - GB	11
4846	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	20 l	1	D - GB	13

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
4847	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	60 l	1	D - GB	11
4847	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	60 l	1	D - GB	13
4849	megol Motorenoel HD-C3 SG (Single-Grade) SAE 30	200 l	1	D - GB	14
4850	megol Zweitaktmotorenoel TC (teilsynthetisch)	200 l	1	D - GB	15
4851	Meguin Hydraulikoel HLP 22	60 l	1	D - GB	30
4857	Meguin Hydraulikoel HLP 22	200 l	1	D - GB	30
4858	Meguin Hydraulikoel HLP 32	200 l	1	D - GB	30
4859	Meguin Hydraulikoel HLP 46	200 l	1	D - GB	30
4860	Meguin Hydraulikoel HLP 68	200 l	1	D - GB	30
4861	megol Hydraulikoel ATF Dexron II D	200 l	1	D - GB	16
4862	megol Transmission-Fluid ATF III (rot)	200 l	1	D - GB	16
4863	Meguin Mehrzweckfett L2	180 kg	1	D - GB	25
4863	Meguin Mehrzweckfett L2	180 kg	1	D - GB	44
4864	Meguin Fließfett L00	180 kg	1	D - GB	25
4864	Meguin Fließfett L00	180 kg	1	D - GB	47
4865	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	200 l	1	D - GB	11
4865	megol Motorenoel Super Leichtlauf FAMO SAE 10W-40	200 l	1	D - GB	13
4866	megol Mehrzweckgetriebeoel GL 4 SAE 80W-90	1 l	6	D - GB - F - HR - RUS - GR	19
4867	megol Mehrzweckgetriebeoel GL 4 SAE 75W-90	1 l	6	D - GB - F - HR - RUS - GR	19
4868	megol Hypoid-Getriebeoel GL 5 SAE 80W-90	1 l	6	D - GB - F - HR - RUS - GR	20
4869	megol Hypoid-Getriebeoel GL 5 SAE 85W-90	60 l	1	D - GB	20
4870	megol Hypoid-Getriebeoel GL 5 SAE 85W-90	200 l	1	D - GB	20
4871	megol Hypoid-Getriebeoel GL 5 SAE 85W-140	60 l	1	D - GB	21
4872	megol Hypoid-Getriebeoel GL 5 SAE 85W-140	200 l	1	D - GB	21
4873	megol Hypoid-Getriebeoel GL 5 SAE 85W-90 LS	200 l	1	D - GB	21
4874	Meguin Hydraulikoel HLP 46	60 l	1	D - GB	30
4875	megol Transmission-Fluid ATF III (rot)	1 l	6	D - GB - F - HR - RUS - GR	16
4876	megol Transmission-Fluid ATF III (rot)	20 l	1	D - GB	16
4877	megol Hydraulikoel ATF Dexron II D	60 l	1	D - GB	16
4878	megol Hypoid-Getriebeoel GL 5 SAE 85W-90	20 l	1	D - GB	20
4879	megol Hydraulikoel ATF Dexron II D	20 l	1	D - GB	16
4880	megol Zweitaktmotorenoel TC	1 l	12	D - GB - F - HR - RUS - GR	15
4881	megol Zweitaktmotorenoel TC	20 l	1	D - GB	15
4882	megol Zweitaktmotorenoel TC	60 l	1	D - GB	15
4883	megol Zweitaktmotorenoel TC (teilsynthetisch)	20 l	1	D - GB	15
4886	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	20 l	1	D - GB	10
4886	megol Motorenoel HD-C3 Super Turbo SAE 20W-50	20 l	1	D - GB	13
4887	Meguin Hydraulikoel HLP 22	20 l	1	D - GB	30
4888	megol Mehrzweckgetriebeoel GL 4 SAE 85W-90	20 l	1	D - GB	18
4889	megol Mehrzweckgetriebeoel GL 4 SAE 85W-90	60 l	1	D - GB	18
4890	megol Mehrzweckgetriebeoel GL 4 SAE 85W-90	200 l	1	D - GB	18
4891	megol Hypoid-Getriebeoel GL 5 SAE 85W-140	20 l	1	D - GB	21
4892	Meguin Bremsenreiniger	20 l	1	D	52
4894	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	1 l	12	D - GB - F - HR - RUS - GR	8
4895	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	5 l	4	D - GB - F - HR - RUS - GR	8
4896	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	20 l	1	D - GB	8
4897	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	60 l	1	D - GB	8
4898	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	200 l	1	D - GB	8
5210	Complete Catalogue NL/I	20			54
5220	Annual Calendar D/GB/F/RUS	50			56
5221	Meguin Folder for brochures	50			56

Part-No.	Description	Cont.	P.U.	Language	Page
5235	Flag 120 x 300 cm	1			55
5236	Paper Cube	20			56
5237	Logo 16 x 7 cm	100			55
5238	Ball Pen	50			56
5239	Pin	10			56
5240	Lighter	150			56
5246	Workshop Clock	6			56
5257	Cap	25			56
5258	Complete Catalogue D	20			54
5291	Logo 48 x 20 cm	100			55
5292	Logo 30 x 13 cm	100			55
5297	Binder empty	16			56
5321	Umbrella	24			56
5390	Image Brochure GB	100			54
5437	Oil Change Tag	1.000			56
5454	Image Brochure D	100			54
5540	Brochure Passenger Cars D	50			54
5586	Table Pennant	1			56
5587	Banner 400 x 100 cm	1			55
5698	Advertising Board 74.5 x 60 cm	1			57
5708	Brochure Passenger Cars RUS	50			54
5758	Desk pad	20			56
5759	Cup black	6			56
5798	T-Shirt red S	5			57
5799	T-Shirt red M	5			57
5800	T-Shirt red L	5			57
5801	T-Shirt red XL	5			57
5802	T-Shirt red XXL	5			57
5827	Meguin Brochure Separating Oil WT01	DV			55
5860	Complete Catalogue RUS/HR	20			54
5861	Complete Catalogue ARAB/F	20			54
5866	Illuminated counter sign	1			57
5882	Industrial Catalogue LM/Meguin D/GB	20			55
5889	Logo 10 x 4.25 cm	50			55
5966	Brochure Agricultural machines D	50			54
5967	Brochure Greases D	50			54
5968	Brochure Trucks D	50			54
6301	megol Motorenöl Super Leichtlauf Multisynth SAE 0W-30	5 l	4	D - GB - F - HR - RUS - GR	4
6303	Meguin Haftöl CGL 100	200 l	1	D - GB	37
6304	megol Zentralhydrauliköl	1 l	6	D	25
6306	Meguin Hydrauliköl HETG 37 (biolog. abbaubar)	20 l	1	D - GB	33
6309	megol Getriebe-Hydrauliköl TO-4 SAE 50	200 l	1	D - GB	24
6314	megol Mehrzweckgetriebeöl GL 4 SAE 140	20 l	1	D - GB	18
6315	megol Hypoid-Getriebeöl GL 5 SAE 80W	20 l	1	D - GB	20
6317	Meguin Schmieröl AN 46	200 l	1	D - GB	34
6317	Meguin Schmieröl AN 46	200 l	1	D - GB	39
6317	Meguin Schmieröl AN 46	200 l	1	D - GB	41
6317	Meguin Schmieröl AN 46	200 l	1	D - GB	42
6318	Meguin Getriebefließfett NP00	5 kg	1	D - GB	48
6319	Meguin Hydrauliköl HVLP 68	60 l	1	D - GB	24
6319	Meguin Hydrauliköl HVLP 68	60 l	1	D - GB	32

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
6321	Meguin Mehrzweckfett L2F100	180 kg	1	D - GB	44
6322	megol Motorenoel WIV 50601 SAE 0W-30 (vollsynthetisch)	5 l	4	D - GB - F - HR - RUS - GR	4
6323	megol Motorenoel WIV 50601 SAE 0W-30 (vollsynthetisch)	1 l	12	D - GB - F	4
6325	megol Motorenoel Leichtlauf Engine SAE 5W-30	200 l	1	D - GB	7
6328	megol Motorenoel Ultra Performance Longlife SAE 5W-40	5 l	4	D - GB - F - HR - RUS - GR	8
6332	megol Motorenoel Synergetic SAE 10W-40	1 l	12	D - GB - F - HR - RUS - GR	13
6333	megol Motorenoel Synergetic SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	13
6334	megol Motorenoel Synergetic SAE 10W-40	60 l	1	D - GB	13
6337	megol Motorenoel Super LL DIMO Premium SAE 10W-40	20 l	1	D - GB	11
6341	megol Getriebe-Hydraulikoel TO-4 SAE 10W	20 l	1	D - GB	24
6342	megol Getriebe-Hydraulikoel TO-4 SAE 30	20 l	1	D - GB	24
6345	megol Zweitaktmotorenoel TC	200 l	1	D - GB	15
6346	Meguin Weißöl PP 20 DAB 10	20 l	1	D - GB	39
6349	megol Motorenoel Performance SHPD 15W-40	20 l	1	D - GB	12
6351	Meguin Kupferpaste	400 g	20	D - GB - F - HR - RUS - GR	26
6351	Meguin Kupferpaste	400 g	20	D - GB - F - HR - RUS - GR	48
6357	Meguin Wälzlagerfett LF2	180 kg	1	D - GB	45
6360	Meguin Hydraulikoel HLPD 10	200 l	1	D - GB	31
6361	megol Motorenoel Leichtlauf Engine SAE 5W-30	60 l	1	D - GB	7
6362	megol Motorenoel SHPD SAE 20W-50	200 l	1	D - GB	12
6364	megol Motorenoel SHPD SAE 20W-50	20 l	1	D - GB	12
6365	megol Motorenoel WIV 50601 SAE 0W-30 (vollsynthetisch)	20 l	1	D - GB	4
6366	megol Mehrzweckgetriebeoel GL 4 SAE 80W	60 l	1	D - GB	18
6368	Meguin Wälzlagerfett LF2	50 kg	1	D - GB	45
6371	Meguin Kupferpaste	180 kg	1	D - GB	26
6371	Meguin Kupferpaste	180 kg	1	D - GB	48
6372	Meguin Getriebeoel CLP 68	200 l	1	D - GB	28
6373	megol Motorenoel Leichtlauf Engine SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	7
6375	Meguin Wälzlagerfett LP3	180 kg	1	D - GB	45
6376	megol Motorenoel Leichtlauf Engine SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	7
6379	Meguin Langzeitfett LP2L	25 kg	1	D - GB	46
6381	Meguin Hydraulikoel HVLP 32	20 l	1	D - GB	24
6381	Meguin Hydraulikoel HVLP 32	20 l	1	D - GB	32
6382	Meguin Hydraulikoel HVLP 46	60 l	1	D - GB	24
6382	Meguin Hydraulikoel HVLP 46	60 l	1	D - GB	32
6383	Meguin Hydraulikoel HLP 68 AF	20 l	1	D - GB	31
6384	Meguin Hydraulikoel HLP 46 AF	200 l	1	D - GB	31
6385	Meguin Getriebeoel CLP 150	20 l	1	D - GB	28
6391	Meguin Gleitoel CGLP 460	200 l	1	D - GB	27
6392	Meguin Hydraulikoel HVLP 32	200 l	1	D - GB	24
6392	Meguin Hydraulikoel HVLP 32	200 l	1	D - GB	32
6393	megol Motorenoel Performance TOP TRANS SAE 15W-40	60 l	1	D - GB	12
6396	Meguin Gleitoel CGLP 46	20 l	1	D - GB	27
6398	megol Motorenoel Ultra Performance Longlife SAE 5W-40	200 l	1	D - GB	8
6399	megol Motorenoel HD-C3 SG (Single-Grade) SAE 40	200 l	1	D - GB	14
6403	megol Getriebe-Hydraulikoel TO-4 SAE 10W	200 l	1	D - GB	24
6404	Meguin Getriebeoel CLP 100	200 l	1	D - GB	28
6406	Meguin Getriebeoel CLP 150	200 l	1	D - GB	28
6407	Meguin Getriebeoel CLP 220	200 l	1	D - GB	28
6409	Meguin Getriebeoel CLP 220	20 l	1	D - GB	28
6410	Meguin Getriebeoel CLP 320	20 l	1	D - GB	28

Part-No.	Description	Cont.	P.U.	Language	Page
6411	Meguin Getriebeoel CLP 460	200 l	1	D - GB	28
6419	Meguin Hydraulikoel HLP 100	200 l	1	D - GB	30
6421	Meguin Hydraulikoel HLP 100	20 l	1	D - GB	30
6422	Meguin Hydraulikoel HLP 150	200 l	1	D - GB	30
6424	Meguin Hydraulikoel HVLP 46	200 l	1	D - GB	24
6424	Meguin Hydraulikoel HVLP 46	200 l	1	D - GB	32
6433	Meguin Turbinenoel TDL 46	200 l	1	D - GB	36
6435	Meguin Kompressorenoel VDL 68	200 l	1	D - GB	35
6436	Meguin Kompressorenoel VDL 100	200 l	1	D - GB	35
6438	Meguin Kompressorenoel VDL 100	20 l	1	D - GB	35
6444	Meguin Mehrzweckfett L3	25 kg	1	D - GB	44
6445	Meguin Wälzlagerfett LP1	50 kg	1	D - GB	45
6446	Meguin Wälzlagerfett LP2	180 kg	1	D - GB	45
6448	Meguin Wälzlagerfett LF2	400 g	20	D - GB - F - HR - RUS - GR	45
6450	Meguin Schwerlastfett	25 kg	1	D - GB	46
6451	Meguin Langzeitfett LP2L	180 kg	1	D - GB	46
6452	Meguin Langzeitfett LP2L	50 kg	1	D - GB	46
6453	Meguin Langzeitfett LP2L	400 g	20	D - GB - F - HR - RUS - GR	46
6460	megol Super Performance SAE 10W-40 (teilsynthetisch)	60 l	1	D - GB	9
6475	megol Motorenöl Syntech Premium SAE 10W-40	4 l	4	D - GB - F - RUS - GR - ARAB	9
6476	megol Super Performance SAE 10W-40 (teilsynthetisch)	20 l	1	D - GB	9
6477	megol Transmission-Fluid ATF III (rot)	5 l	4	D - GB - F - HR - RUS - GR	16
6478	megol Motorenöl HD-C3 SAE 15W-40	4 l	4	D - GB - F - HR - RUS - GR	9
6478	megol Motorenöl HD-C3 SAE 15W-40	4 l	4	D - GB - F - HR - RUS - GR	13
6479	megol Hydraulikoel ATF Dexron II D	1 l	6	D	16
6480	Meguin Sägekettenoel BIO 100	200 l	1	D - GB	37
6481	Meguin Sägekettenoel BIO 150	200 l	1	D - GB	37
6482	Meguin Mehrzweckfett L2	15 kg	1	D - GB	25
6482	Meguin Mehrzweckfett L2	15 kg	1	D - GB	44
6483	Meguin Mehrzweckfett L2F100	15 kg	1	D - GB	44
6484	megol Motorenöl Universal SAE 20W-50	20 l	1	D - GB	10
6484	megol Motorenöl Universal SAE 20W-50	20 l	1	D - GB	13
6485	megol Motorenöl Universal SAE 20W-50	200 l	1	D - GB	10
6485	megol Motorenöl Universal SAE 20W-50	200 l	1	D - GB	13
6486	megol Motorenöl Ultra Performance Longlife SAE 5W-40	4 l	4	D - GB - F - HR - RUS - GR	8
6489	Meguin Getriebeoel CLP 320	200 l	1	D - GB	28
6490	megol Motorenöl Performance TOP TRANS SAE 15W-40	200 l	1	D - GB	12
6491	megol Super Performance SAE 10W-40 (teilsynthetisch)	200 l	1	D - GB	9
6493	Meguin Mehrzweckfett L3	5 kg	1	D - GB	44
6495	Meguin Gleitoel CGLP 460	20 l	1	D - GB	27
6496	Meguin Getriebeoel CLP 100	20 l	1	D - GB	28
6498	Meguin Langzeitfett LP2L	5 kg	1	D - GB	46
6500	Meguin Hydraulikoel HLPD 22	200 l	1	D - GB	31
6503	Meguin Fließfett L00	15 kg	1	D - GB	25
6503	Meguin Fließfett L00	15 kg	1	D - GB	47
6506	Meguin Wälzlagerfett LP1	180 kg	1	D - GB	45
6508	megol Mehrzweckgetriebeoel GL 4 SAE 140	200 l	1	D - GB	18
6510	Meguin Hochtemperaturfett ALX2	400 g	20	D - GB - F - HR - RUS - GR	48
6511	Meguin Gleitoel CGLP 68	200 l	1	D - GB	27
6512	megol Motorenöl New Generation SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
6513	megol Motorenöl New Generation SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
6514	megol Motorenöl 4-Takt SAE 20W-50	20 l	1	D - GB	15
6521	Meguin Kompressorenöl VDL 46	200 l	1	D - GB	35
6523	megol Zweitaktmotorenöl GD (vollsynthetisch)	1 l	12	D - GB - F - HR - RUS - GR	15
6524	megol Motorenöl RACER SAE 10W-60 (vollsynthetisch)	1 l	12	D - GB - F - HR - RUS - GR	15
6525	megol Outboard Motoroil TC-W3	20 l	1	D - GB	15
6527	megol Mehrzweckgetriebeöl GL 4 SAE 80W	200 l	1	D - GB	18
6529	megol Traktorenöl Universal STOU/UTTO	20 l	1	D - GB	23
6533	Meguin Kompressorenöl VDL 46	20 l	1	D - GB	35
6535	Meguin Gleitöl CGLP 220	20 l	1	D - GB	27
6536	megol Motorenöl Super LL DIMO Premium SAE 10W-40	60 l	1	D - GB	11
6537	megol Motorenöl Super LL DIMO Premium SAE 10W-40	200 l	1	D - GB	11
6539	megol Motorenöl Leichtlauf Engine SAE 5W-30	20 l	1	D - GB	7
6550	Meguin Fuel System Cleaner	250 ml	12	GB - D - F - RUS - ARAB	50
6551	Meguin Diesel System Cleaner	250 ml	12	GB - D - F - RUS - ARAB	51
6552	Meguin Carburetor Cleaner	250 ml	12	GB - D - F - HR - RUS	50
6553	Meguin Radiator Cleaner	250 ml	12	GB - D - F - RUS - ARAB	51
6554	Meguin Radiator Safe	250 ml	12	GB - D - F - RUS - ARAB	51
6555	Meguin Visco Safe	250 ml	12	GB - D - F - RUS - ARAB	49
6556	Meguin Motor Flush	250 ml	12	GB - D - F - RUS - ARAB	49
6557	Meguin Oil Safe	250 ml	12	GB - D - F - RUS - ARAB	49
6558	Meguin Motor Safe	250 ml	12	GB - D - F - RUS - ARAB	49
6559	Meguin Hydraulic Lifter Additive	250 ml	12	GB - D - F - RUS - ARAB	49
6560	Meguin Diesel Additiv	50 l	1	D - GB	50
6561	megol Motorenöl Compatible SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
6562	megol Motorenöl Compatible SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6
6563	megol Motorenöl Compatible SAE 5W-30	20 l	1	D - GB	6
6564	megol Motorenöl Compatible SAE 5W-30	60 l	1	D - GB	6
6565	megol Motorenöl Compatible SAE 5W-30	200 l	1	D - GB	6
6566	megol Motorenöl Quality SAE 5W-30	1 l	12	D - GB - F - RUS - GR - ARAB	7
6567	megol Motorenöl Quality SAE 5W-30	5 l	4	D - GB - F - RUS - GR - ARAB	7
6568	megol Motorenöl Quality SAE 5W-30	20 l	1	D - GB	7
6573	megol Motorenöl Low Emission SAE 5W-40	1 l	12	D - GB - F - HR - RUS - GR	8
6574	megol Motorenöl Low Emission SAE 5W-40	5 l	4	D - GB - F - HR - RUS - GR	8
6575	megol Motorenöl Low Emission SAE 5W-40	20 l	1	D - GB	8
6576	megol Motorenöl Low Emission SAE 5W-40	60 l	1	D - GB	8
6577	Meguin Octane Booster	150 ml	20	D - GB - RUS	50
6581	megol Motorenöl Low Emission SAE 5W-40	200 l	1	D - GB	8
6582	megol Motorenöl Quality SAE 5W-30	60 l	1	D - GB	7
6583	megol Motorenöl Low SAPS SAE 10W-40	20 l	1	D - GB	11
6584	megol Motorenöl Low SAPS SAE 10W-40	60 l	1	D - GB	11
6585	megol Motorenöl Low SAPS SAE 10W-40	200 l	1	D - GB	11
6660	Meguin Mehrzweckfett L3	50 kg	1	D - GB	44
6665	megol Motorenöl SHPD SAE 20W-50	60 l	1	D - GB	12
6667	megol Hochleistungsgetriebeöl GL 4 SAE 75W-80	60 l	1	D - GB	19
6668	megol Hypoid-Getriebeöl GL 4 + SAE 75W-90	60 l	1	D - GB	19
6672	Meguin Langzeiftell LP2L	15 kg	1	D - GB	46
6673	Meguin Fließfett L00	50 kg	1	D - GB	25
6673	Meguin Fließfett L00	50 kg	1	D - GB	47
6674	Meguin Kompressorenöl VDL 150	20 l	1	D - GB	35
6675	megol Motorenöl Low Emission SAE 5W-40	4 l	4	D - GB - F - HR - RUS - GR	8
6676	Meguin Schaloel (wasserlöslich)	200 l	1	D - GB	38

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
6677	Meguin Gleitoel CGLP 68	20 l	1	D - GB	27
6684	Meguin Langzeitfett C2LP	400 g	20	D - GB - F - HR - RUS - GR	43
6687	megol Motorenoel Quality SAE 5W-30	200 l	1	D - GB	7
6696	megol Motorenoel New Generation SAE 5W-30	20 l	1	D - GB	6
6697	megol Motorenoel New Generation SAE 5W-30	200 l	1	D - GB	6
6838	megol Getriebe-Hydrauliköl TO-4 SAE 10W	60 l	1	D - GB	24
6839	megol Transmission-Fluid ATF III G	1 l	6	D - GB - F - RUS - GR - ARAB	16
6841	megol Premium Getriebeöel HC GL 4 75W-80	20 l	1	D - GB	19
6843	megol Premium Getriebeöel HC GL 4 75W-80	200 l	1	D - GB	19
6850	megol Motorenoel WIV 50601 SAE 0W-30 (vollsynthetisch)	60 l	1	D - GB	4
6851	megol Special Engine Oil SAE 0W-20	5 l	4	D - GB - F - E - P - NL - ARAB	4
6862	megol Special Engine Oil SAE 10W-30	5 l	4	GB - F - E - P - NL - ARAB	7
6863	megol Motorenoel Universal SAE 20W-50	60 l	1	D - GB	10
6863	megol Motorenoel Universal SAE 20W-50	60 l	1	D - GB	13
6868	megol Motorenoel Super LL DIMO Premium SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	11
6871	megol Motorenoel Synergetic SAE 10W-40	200 l	1	D - GB	13
6881	megol Motorenoel HD-C3 SG (Single-Grade) SAE 20W-20	200 l	1	D - GB	14
6884	megol Motorenoel Syntech Premium SAE 10W-40	IBC 1000 l	1	D - GB	9
6886	Meguin Schaloel FSE 4	200 l	1	D - GB	38
6888	Meguin Sägekettenöel BIO 150	20 l	1	D - GB	37
6889	Meguin Sägekettenöel BIO 100	20 l	1	D - GB	37
7016	megol Hypoid-Getriebeöel Axle LS 85W-90	20 l	1	D - GB	21
7042	megol Special Engine Oil SAE 5W-20	60 l	1	D - GB	5
7072	megol Special Engine Oil SAE 5W-20	200 l	1	D - GB	5
7077	megol Motorenoel Premium Truck LA SAE 5W-30	60 l	1	D - GB	10
7078	megol Special Engine Oil SAE 0W-20	1 l	12	D - GB - F - E - P - NL - ARAB	4
7086	Meguin Haftöel CGL 460	200 l	1	D - GB	37
8415	Meguin Wälzlagerfett K3N-20 blau	1 kg	4	D - GB - F - ARAB - HR - RUS - GR	46
8416	megol Motorenoel SHPD SAE 15W-40 TBN 20	20 l	1	D - GB	12
8426	Meguin Wälzlagerfett LP1	25 kg	1	D - GB	45
8427	Meguin Wälzlagerfett LP2	15 kg	1	D - GB	45
8428	Meguin Wälzlagerfett LP3	25 kg	1	D - GB	45
8430	Meguin Wälzlagerfett LF2	25 kg	1	D - GB	45
8431	Meguin Wälzlagerfett LP2F200+	25 kg	1	D - GB	45
8434	Meguin Schwerlastfett	400 g	20	D - GB - F - HR - RUS - GR	46
8436	Meguin Schmierfett LP2F200	180 kg	1	D - GB	46
8438	Meguin Getriebefließfett LP00	5 kg	1	D - GB	47
8439	Meguin Getriebefließfett LP00	15 kg	1	D - GB	47
8440	Meguin Getriebefließfett LP00	25 kg	1	D - GB	47
8442	Meguin Getriebefließfett LP00	180 kg	1	D - GB	47
8447	Meguin Multi-Purpose Spray	400 ml	12	GB - D - F - RUS - ARAB	52
8450	Meguin Rust Solvent	300 ml	12	GB - D - F - RUS - ARAB	52
8452	Meguin Getriebefließfett NP00	25 kg	1	D - GB	48
8454	Meguin Getriebefließfett NP00	180 kg	1	D - GB	48
8456	Meguin Getriebefließfett NPO	15 kg	1	D - GB	48
8457	Meguin Getriebefließfett NPO	25 kg	1	D - GB	48
8464	Meguin Hochtemperaturfett ALX2	25 kg	1	D - GB	48
8466	Meguin Hochtemperaturfett ALX2	180 kg	1	D - GB	48
8479	Meguin Handwasch Paste	12.5 l	1	D - GB - F - HR - RUS	52
8481	Meguin Flugrostentferner	1 l	6	D	25
8482	Meguin Flugrostentferner	20 l	1	D	25

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
8483	Meguin Bremsenreiniger	1 l	12	GB – D – F – RUS – ARAB	52
8493	Meguin Carburetor Cleaner	50 l	1	D – GB	50
8495	Brochure Meguin additives LT/LV/GE/P/E/H	300			54
8496	Brochure Meguin Service Products LT/LV/GE/P/E/H	50			54
8497	megol Motorenoel Quality SAE 5W-30	IBC 1000 l	1	D – GB	7
8533	Brochure Corrosion Protection Oils RUS	50			54
8535	Brochure Greases RUS	50			54
8548	megol Motorenoel UHPD Long Drain SAE 10W-40	20 l	1	D – GB	11
8603	megol Zweitaktmotorenoel GD (vollsynthetisch)	20 l	1	D – GB	15
8609	megol Mehrzweckgetriebeoel GL 4 SAE 80W	1 l	6	GB – F – HR – RUS – GR	18
8613	megol Hochleistungsgetriebeoel GL 4 SAE 75W-80	20 l	1	D – GB	19
8615	megol Hochleistungsgetriebeoel GL 4 SAE 75W-80	200 l	1	D – GB	19
8616	megol Hypoid-Getriebeoel GL 4 + SAE 75W-90	20 l	1	D – GB	19
8618	megol Hypoid-Getriebeoel GL 4 + SAE 75W-90	200 l	1	D – GB	19
8620	megol Hypoid-Getriebeoel GL 5 SAE 80W	200 l	1	D – GB	20
8621	megol Hypoid-Getriebeoel GL 5 SAE 140	20 l	1	D – GB	20
8622	megol Hypoid-Getriebeoel GL 5 SAE 140	60 l	1	D – GB	20
8623	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (teilsynthetisch)	20 l	1	D – GB	20
8624	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (teilsynthetisch)	60 l	1	D – GB	20
8626	megol Getriebeoel Truck-Synth SAE 75W-90	20 l	1	D – GB	22
8627	megol Getriebeoel Truck-Synth SAE 75W-90	60 l	1	D – GB	22
8628	megol Getriebeoel Truck-Synth SAE 75W-90	200 l	1	D – GB	22
8629	megol Traktorenoel Universal STOU/UTTO	60 l	1	D – GB	23
8630	megol Traktorenoel Universal STOU/UTTO	200 l	1	D – GB	23
8632	Meguin Hydraulikoel HVLP 32	60 l	1	D – GB	24
8632	Meguin Hydraulikoel HVLP 32	60 l	1	D – GB	32
8633	Meguin Hydraulikoel HVLP 68	20 l	1	D – GB	24
8633	Meguin Hydraulikoel HVLP 68	20 l	1	D – GB	32
8634	Meguin Hydraulikoel HVLP 68	200 l	1	D – GB	24
8634	Meguin Hydraulikoel HVLP 68	200 l	1	D – GB	32
8637	megol Motorenoel UHPD Long Drain SAE 10W-40	60 l	1	D – GB	11
8638	megol Motorenoel UHPD Long Drain SAE 10W-40	200 l	1	D – GB	11
8641	megol Zentralhydraulikoel	20 l	1	D – GB	25
8642	megol Zentralhydraulikoel	60 l	1	D – GB	25
8645	Meguin Lithium-Komplexfett LX2P	400 g	20	D – GB – F – HR – RUS – GR	26
8645	Meguin Lithium-Komplexfett LX2P	400 g	20	D – GB – F – HR – RUS – GR	47
8646	Meguin Lithium-Komplexfett LX2P	5 kg	1	D – GB	26
8646	Meguin Lithium-Komplexfett LX2P	5 kg	1	D – GB	47
8647	Meguin Lithium-Komplexfett LX2P	15 kg	1	D – GB	26
8647	Meguin Lithium-Komplexfett LX2P	15 kg	1	D – GB	47
8648	Meguin Lithium-Komplexfett LX2P	25 kg	1	D – GB	26
8648	Meguin Lithium-Komplexfett LX2P	25 kg	1	D – GB	47
8649	Meguin Lithium-Komplexfett LX2P	50 kg	1	D – GB	26
8649	Meguin Lithium-Komplexfett LX2P	50 kg	1	D – GB	47
8650	Meguin Lithium-Komplexfett LX2P	180 kg	1	D – GB	26
8650	Meguin Lithium-Komplexfett LX2P	180 kg	1	D – GB	47
8651	Meguin Kupferpaste	50 kg	1	D – GB	26
8651	Meguin Kupferpaste	50 kg	1	D – GB	48
8652	Meguin Gleitoel CGLP 46	200 l	1	D – GB	27
8653	Meguin Gleitoel CGLP 100	20 l	1	D – GB	27
8654	Meguin Gleitoel CGLP 100	200 l	1	D – GB	27

Part-No.	Description	Cont.	P.U.	Language	Page
8655	Meguin Gleitoel CGLP 150	20 l	1	D - GB	27
8656	Meguin Gleitoel CGLP 150	200 l	1	D - GB	27
8657	Meguin Gleitoel CGLP 220	200 l	1	D - GB	27
8658	Meguin Gleitoel CGLP 320	20 l	1	D - GB	27
8659	Meguin Gleitoel CGLP 320	200 l	1	D - GB	27
8662	Meguin Getriebeoel CLP 46	20 l	1	D - GB	28
8663	Meguin Getriebeoel CLP 46	200 l	1	D - GB	28
8664	Meguin Getriebeoel CLP 680	200 l	1	D - GB	28
8666	megol Gearoil Synth ISO VG 220	200 l	1	D - GB	29
8670	Meguin Getriebeoel CLPF 220	200 l	1	D - GB	29
8675	Meguin Hydraulikoel HLP 10	20 l	1	D - GB	30
8676	Meguin Hydraulikoel HLP 10	60 l	1	D - GB	30
8677	Meguin Hydraulikoel HLP 10	200 l	1	D - GB	30
8679	Meguin Hydraulikoel HLP 15	20 l	1	D - GB	30
8681	Meguin Hydraulikoel HLP 15	200 l	1	D - GB	30
8685	Meguin Hydraulikoel HLP 46	5 l	4	D	30
8688	Meguin Hydraulikoel HLP 100	60 l	1	D - GB	30
8690	Meguin Hydraulikoel HLP 150	20 l	1	D - GB	30
8695	Meguin Hydraulikoel HLP 32 AF	20 l	1	D - GB	31
8696	Meguin Hydraulikoel HLP 32 AF	200 l	1	D - GB	31
8697	Meguin Hydraulikoel HLP 46 AF	20 l	1	D - GB	31
8698	Meguin Hydraulikoel HLP 68 AF	200 l	1	D - GB	31
8701	Meguin Hydraulikoel HLPD 10	20 l	1	D - GB	31
8702	Meguin Hydraulikoel HLPD 22	20 l	1	D - GB	31
8703	megol Gasmotorenoel Synth SAE 40	20 l	1	D - GB	40
8704	Meguin Hydraulikoel HLPD 46 AF	20 l	1	D - GB	32
8705	Meguin Hydraulikoel HLPD 46 AF	200 l	1	D - GB	32
8708	megol Gasmotorenoel LA SAE 40	20 l	1	D - GB	41
8709	megol Gasmotorenoel LA SAE 40	200 l	1	D - GB	41
8711	megol Gasmotorenoel High Performance SAE 40	200 l	1	D - GB	41
8714	Meguin Hydraulikoel HVLPD 46	20 l	1	D - GB	24
8714	Meguin Hydraulikoel HVLPD 46	20 l	1	D - GB	33
8715	Meguin Hydraulikoel HVLPD 46	60 l	1	D - GB	24
8715	Meguin Hydraulikoel HVLPD 46	60 l	1	D - GB	33
8716	Meguin Hydraulikoel HVLPD 46	200 l	1	D - GB	24
8716	Meguin Hydraulikoel HVLPD 46	200 l	1	D - GB	33
8718	Meguin Hydraulikoel HETG 37 (biolog. abbaubar)	200 l	1	D - GB	33
8719	Meguin Hydraulikoel HEES 22 (biolog. abbaubar)	20 l	1	D - GB	34
8720	Meguin Hydraulikoel HEES 22 (biolog. abbaubar)	200 l	1	D - GB	34
8721	Meguin Hydraulikoel HEES 46 (biolog. abbaubar)	20 l	1	D - GB	34
8722	Meguin Hydraulikoel HEES 46 (biolog. abbaubar)	60 l	1	D - GB	34
8723	Meguin Hydraulikoel HEES 46 (biolog. abbaubar)	200 l	1	D - GB	34
8724	Meguin Schmieroel AN 100	20 l	1	D - GB	34
8724	Meguin Schmieroel AN 100	20 l	1	D - GB	41
8725	Meguin Schmieroel AN 100	200 l	1	D - GB	34
8725	Meguin Schmieroel AN 100	200 l	1	D - GB	41
8727	Meguin Spindeloel N 10	200 l	1	D - GB	35
8733	Meguin Turbinenoel TDL 32	20 l	1	D - GB	36
8734	Meguin Turbinenoel TDL 32	200 l	1	D - GB	36
8735	Meguin Turbinenoel TDL 46	20 l	1	D - GB	36
8737	Meguin Sägekettenoel 100	200 l	1	D - GB	36

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
8738	Meguin Sägekettenoel BIO 68	200 l	1	D - GB	37
8739	Meguin Haftoel CGL 100	20 l	1	D - GB	37
8740	Meguin Haftoel CGL 150	20 l	1	D - GB	37
8741	Meguin Haftoel CGL 150	200 l	1	D - GB	37
8742	Meguin Haftoel CGL 220	20 l	1	D - GB	37
8743	Meguin Haftoel CGL 220	200 l	1	D - GB	37
8744	Meguin Haftoel CGL 320	20 l	1	D - GB	37
8745	Meguin Haftoel CGL 320	200 l	1	D - GB	37
8746	Meguin Haftoel CGL 680	20 l	1	D - GB	37
8747	Meguin Haftoel CGL 680	200 l	1	D - GB	37
8748	Meguin Schaloel Spezial FS 7	20 l	1	D - GB	38
8749	Meguin Schaloel Spezial FS 7	200 l	1	D - GB	38
8750	Meguin Schaloel FSE 4	20 l	1	D - GB	38
8751	Meguin Schaloel (wasserlöslich)	20 l	1	D - GB	38
8752	Meguin Weißöl PP 20 DAB 10	200 l	1	D - GB	39
8753	Meguin Rostschutz-Sprühöel ohne Graphit	20 l	1	D - GB	39
8754	Meguin Rostschutz-Sprühöel ohne Graphit	200 l	1	D - GB	39
8755	Meguin Rostschutz-Sprühöel mit Graphit	20 l	1	D - GB	39
8757	Meguin Transformatorenoel J 10	20 l	1	D - GB	40
8758	Meguin Transformatorenoel J 10	208 l	1	D - GB	40
8762	Meguin Heißdampf Zylinderoel ZB 1000	200 l	1	D - GB	40
8763	megol Gasmotorenoel Synth SAE 40	200 l	1	D - GB	40
8773	Meguin Schneidoel SLP 22	20 l	1	D - GB	42
8774	Meguin Schneidoel SLP 22	200 l	1	D - GB	42
8775	Meguin Schneidoel SLP 32	20 l	1	D - GB	42
8776	Meguin Schneidoel SLP 32	200 l	1	D - GB	42
8785	Meguin Dicht- und Trennfett C2	15 kg	1	D - GB	43
8786	Meguin Dicht- und Trennfett C2	25 kg	1	D - GB	43
8788	Meguin Dicht- und Trennfett C2	180 kg	1	D - GB	43
8789	Meguin Schmierfett C2 (rot)	25 kg	1	D - GB	43
8791	Meguin Schmierfett C2 (rot)	180 kg	1	D - GB	43
8792	Meguin Langzeitfett C2LP	15 kg	1	D - GB	43
8793	Meguin Langzeitfett C2LP	25 kg	1	D - GB	43
8794	Meguin Langzeitfett C2LP	50 kg	1	D - GB	43
8795	Meguin Langzeitfett C2LP	180 kg	1	D - GB	43
8796	Meguin Schmierfett C2S	25 kg	1	D - GB	43
8798	Meguin Mehrzweckfett L3	15 kg	1	D - GB	44
8799	Meguin Wälzlagerfett LP3	400 g	20	D - GB - F - HR - RUS - GR	45
8830	megol Zweitaktmotorenoel GD (vollsynthetisch)	60 l	1	D - GB	15
9008	megol Getriebeoel ATF Variable	200 l	1	D - GB	17
9010	Meguin Hydraulikoel HLP 32	1 l	12	D	30
9013	megol Getriebeoel ATF Variable Gelb	1 l	6	GB - NL - F - E - P - ARAB	16
9024	Meguin Hydraulikoel HLP 32	5 l	4	D	30
9025	megol Zweitaktmotorenoel TC (teilsynthetisch)	1 l	12	D - GB - F - HR - RUS - GR	15
9026	megol Zweitaktmotorenoel TC (teilsynthetisch)	250 ml	12	D - GB - F - HR - RUS - GR	15
9027	megol Motorenoel Quality SAE 5W-30	4 l	4	D - GB - F - RUS - GR - ARAB	7
9028	Meguin Mehrzweckfett L2	400 g	20	D - GB - F - HR - RUS - GR	44
9028	Meguin Mehrzweckfett L2	400 g	20	D - GB - F - HR - RUS - GR	25
9029	Meguin Wälzlagerfett LP2	400 g	20	D - GB - F - HR - RUS - GR	45
9030	Meguin Langzeitfett LP2L	400 g	20	D - GB - F - HR - RUS - GR	46
9034	Meguin Injection Cleaner	250 ml	12	GB - D - F - RUS - ARAB	50

Part-No.	Description	Cont.	P.U.	Language	Page
9036	Meguin Getriebefließfett LP00	400 g	20	D	47
9038	megol Motorenoel Fuel Eco 1 SAE 0W-30	200 l	1	D - GB	4
9065	megol Motorenoel Super Leichtlauf DRIVER SAE 0W-40	4 l	4	D - GB - F - HR - RUS - GR	8
9073	megol Transmission-Fluid ATF III G	1 l	6	GB - NL - F - E - P - ARAB	16
9147	megol Transmission-Fluid ATF III G	5 l	4	D - GB - F - HR - RUS - GR	16
9148	megol Motorenoel Universal SAE 20W-50	4 l	4	D - GB - F - HR - RUS - GR	10
9148	megol Motorenoel Universal SAE 20W-50	4 l	4	D - GB - F - HR - RUS - GR	13
9149	megol Motorenoel Universal SAE 15W-40	4 l	4	D - GB - F - HR - RUS - GR	9
9149	megol Motorenoel Universal SAE 15W-40	4 l	4	D - GB - F - HR - RUS - GR	13
9214	megol Motorenoel HD Super SAE 20W-20	200 l	1	D - GB	14
9218	Meguin Trennoel WT01 S	20 l	1	D - GB	38
9220	Meguin Trennoel WT01 S	200 l	1	D - GB	38
9222	Meguin Trennoel WT01 S	IBC 1000 l	1	D - GB	38
9240	Meguin Korrosionsschutz 6M	20 l	1	D	40
9249	megol Gearoil Synth ISO VG 150	20 l	1	D - GB	29
9252	megol Gearoil Synth ISO VG 220	20 l	1	D - GB	29
9276	megol Motorenoel Global Truck SHPD SAE 15W-40	20 l	1	D - GB	12
9278	megol Motorenoel Global Truck SHPD SAE 15W-40	60 l	1	D - GB	12
9281	megol Motorenoel Global Truck SHPD SAE 15W-40	200 l	1	D - GB	12
9284	Meguin Cutting Oil V15	208 l	1	D - GB	42
9289	megol Motorenoel New Engine FE SAE 5W-20	1 l	12	D - GB - F - HR - RUS - GR	5
9291	megol Motorenoel New Engine FE SAE 5W-20	5 l	4	D - GB - F - HR - RUS - GR	5
9293	megol Motorenoel New Engine FE SAE 5W-20	20 l	1	D - GB	5
9295	megol Motorenoel New Engine FE SAE 5W-20	60 l	1	D - GB	5
9297	megol Motorenoel New Engine FE SAE 5W-20	200 l	1	D - GB	5
9332	Meguin Schneidoel SLP 22	60 l	1	D - GB	42
9341	Meguin Rostschutz-Sprühöl ohne Graphit	60 l	1	D - GB	39
9359	Meguin Sägekettenoel BIO 68	60 l	1	D - GB	37
9362	Meguin Sägekettenoel BIO 100	60 l	1	D - GB	37
9381	Complete Catalogue E/P	10			54
9382	Meguin Kompressorenoel VDL 46	60 l	1	D - GB	35
9385	Meguin Kompressorenoel VDL 68	60 l	1	D - GB	35
9404	Meguin Schmierfett C2 (rot)	5 kg	1	D - GB	43
9409	Meguin Wälzlagerfett LP3	15 kg	1	D - GB	45
9411	Meguin Wälzlagerfett LP2F200+	15 kg	1	D - GB	45
9422	Meguin Mehrzweckfett BIO 2	5 kg	1	D - GB	44
9424	megol Getriebeoel ATF Smooth	1 l	6	D - GB - F - HR - RUS - GR	16
9427	megol Getriebeoel ATF Variable	1 l	6	D - GB - F - HR - RUS - GR	17
9433	megol Getriebeoel Power Transmission SAE 80W-90	20 l	1	D - GB - F - HR - RUS - GR	22
9434	megol Getriebeoel Power Transmission SAE 80W-90	60 l	1	D - GB - F - HR - RUS - GR	22
9435	megol Spezial MTF GL 5 SAE 75W-80	1 l	6	D - GB - F - HR - RUS - GR	20
9437	megol Spezial MTF GL 5 SAE 75W-80	20 l	1	D - GB - F - HR - RUS - GR	20
9438	megol Spezial MTF GL 5 SAE 75W-80	60 l	1	D - GB - F - HR - RUS - GR	20
9440	megol Motorenoel Fuel Economy SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	6
9441	megol Motorenoel Fuel Economy SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	6
9442	megol Motorenoel Fuel Economy SAE 5W-30	20 l	1	D - GB	6
9443	megol Motorenoel Fuel Economy SAE 5W-30	60 l	1	D - GB	6
9444	megol Motorenoel Fuel Economy SAE 5W-30	200 l	1	D - GB	6
9446	Meguin Spezial-Kompressorenoel VDL 68 HC	20 l	1	D - GB	36
9447	megol Super Traktorenoel STOU SAE 10W-40	20 l	1	D - GB	23
9448	megol Super Traktorenoel STOU SAE 10W-40	60 l	1	D - GB	23

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
9449	megol Super Traktorenoel STOU SAE 10W-40	200 l	1	D - GB	23
9451	megol Getriebeoel Power Transmission SAE 80W-90	200 l	1	D - GB	22
9452	megol Getriebeoel CVT Dynamik	1 l	6	D - GB - F - RUS - GR - ARAB	17
9459	Meguin Mehrzweckfett BIO 2	15 kg	1	D - GB	44
9460	Meguin Mehrzweckfett BIO 2	25 kg	1	D - GB	44
9462	Meguin Mehrzweckfett BIO 2	180 kg	1	D - GB	44
9466	Meguin Spezial-Kompressorenoel VDL 68 HC	200 l	1	D - GB	36
9468	megol Motorenoel Mobility SAE 5W-30	20 l	1	D - GB	6
9469	megol Motorenoel Mobility SAE 5W-30	60 l	1	D - GB	6
9470	megol Motorenoel Mobility SAE 5W-30	200 l	1	D - GB	6
9472	megol Motorenoel Ecology SAE 5W-30	20 l	1	D - GB	6
9473	megol Motorenoel Ecology SAE 5W-30	60 l	1	D - GB	6
9474	megol Motorenoel Ecology SAE 5W-30	200 l	1	D - GB	6
9476	megol Motorenoel Surface Protection SAE 5W-30	20 l	1	D - GB	7
9477	megol Motorenoel Surface Protection SAE 5W-30	60 l	1	D - GB	7
9478	megol Motorenoel Surface Protection SAE 5W-30	200 l	1	D - GB	7
9480	megol Motorenoel Efficiency SAE 5W-30	20 l	1	D - GB	6
9481	megol Motorenoel Efficiency SAE 5W-30	60 l	1	D - GB	6
9482	megol Motorenoel Efficiency SAE 5W-30	200 l	1	D - GB	6
9484	megol Motorenoel High Condition SAE 5W-40	20 l	1	D - GB	8
9485	megol Motorenoel High Condition SAE 5W-40	60 l	1	D - GB	8
9486	megol Motorenoel High Condition SAE 5W-40	200 l	1	D - GB	8
9488	megol Motorenoel Low SAPS SAE 10W-40	5 l	4	D - GB - F - HR - RUS - GR	11
9490	megol Motorenoel UHPD Truck SAE 5W-30	200 l	1	D - GB	10
9491	megol Motorenoel UHPD Truck SAE 5W-30	60 l	1	D - GB	10
9492	megol Motorenoel UHPD Truck SAE 5W-30	20 l	1	D - GB	10
9494	megol Motorenoel Premium Truck LA SAE 5W-30	20 l	1	D - GB	10
9495	megol Motorenoel Premium Truck LA SAE 5W-30	200 l	1	D - GB	10
9498	megol Special Engine Oil SAE 5W-20	1 l	12	D - GB - F - RUS - GR - ARAB	5
9499	megol Special Engine Oil SAE 5W-20	5 l	4	D - GB - F - RUS - GR - ARAB	5
9600	megol Motorenoel Syntech Premium SAE 10W-40	1 l	12	GB - F - E - P - NL - ARAB	9
9601	megol Motorenoel Syntech Premium SAE 10W-40	5 l	4	GB - F - E - P - NL - ARAB	9
9608	megol Motorenoel Low Emission SAE 5W-40	1 l	12	GB - F - E - P - NL - ARAB	8
9609	megol Motorenoel Racing 4T SAE 10W-40	1 l	12	GB - F - E - P - NL - ARAB	16
9610	megol Motorenoel Low Emission SAE 5W-40	5 l	4	GB - F - E - P - NL - ARAB	8
9619	megol Motorenoel Compatible SAE 5W-30	1 l	12	GB - F - E - P - NL - ARAB	6
9620	megol Motorenoel LD Super Extra SAE 10W-30	5 l	4	GB - F - E - P - NL - ARAB	7
9621	megol Motorenoel Compatible SAE 5W-30	5 l	4	GB - F - E - P - NL - ARAB	6
9628	megol Motorenoel Universal SAE 20W-50	1 l	12	GB - F - E - P - NL - ARAB	10
9637	megol Hypoid-Getriebeoel GL 5 SAE 75W-90 (vollsynthetisch)	1 l	6	GB - F - E - P - NL - ARAB	21
9638	megol Transmission-Fluid ATF III (rot)	1 l	6	GB - F - E - P - NL - ARAB	16
9680	Meguin Radiator Safe	250 ml	12	D - NL - F - I - E	51
9681	Meguin Radiator Cleaner	250 ml	12	D - NL - F - I - E	51
9687	megol Motorenoel Racing 4T SAE 10W-40	20 l	1	D - NL - F - I - E	16
9688	megol Motorenoel Racing 4T SAE 10W-40	200 l	1	D - NL - F - I - E	16
9690	Meguin Diesel System Cleaner	250 ml	12	D - NL - F - I - E	51
9903	Futura Shop 40 x 60 cm empty	1			57
9909	Side sections for Futurashop (2 pieces)	1			57
9937	Topper Tego-metal-rack	1			57
9939	Topper Futura Shop	44			57
9964	Shelf strips	100			57

Part-No.	Description	Cont.	P.U.	Language	Page
9969	Tego-metal-rack 66.5 cm empty	1			57
9983	Note Pad for Training DIN A4	150			56
9984	Shelf rail FH white/insert 66.5 cm	12			57
9988	Tego-metal-rack 125 cm empty	1			57
9990	Shelf rail FH white/insert 125 cm	24			57
9991	Product divider	50			57
9992	Locking feet	10			57
33001	Meguin Hydraulikoel HLP 32	IBC 1000 l	1	D - GB	30
33002	megol Motorenoel Super Leichtlauf 5W-50	4 l	4	GB - F - E - P - NL - ARAB	8
33003	megol Motorenoel Truck Mid SAPS SAE 10W-40	20 l	1	D - GB	11
33004	megol Motorenoel Truck Mid SAPS SAE 10W-40	60 l	1	D - GB	11
33005	megol Motorenoel Truck Mid SAPS SAE 10W-40	200 l	1	D - GB	11
33007	megol Getriebeoel ATF Variable Low Viscosity	1 l	6	D - GB - F - RUS - GR - ARAB	17
33009	Meguin Langzeitfett C2LP	400 g	20	D - GB - F - HR - RUS - GR	43
33010	megol Getriebeoel ATF Variable Low Viscosity	20 l	1	D - GB	17
33012	megol Motorenoel New Engine FED SAE 0W-30	20 l	1	D - GB	5
33013	megol Motorenoel New Engine FED SAE 0W-30	60 l	1	D - GB	5
33014	megol Motorenoel New Engine FED SAE 0W-30	200 l	1	D - GB	5
33015	megol Motorenoel New Engine FED SAE 0W-30	1 l	12	D - GB - F - HR - RUS - GR	5
33018	megol Motorenoel Dynamik DX 1 SAE 5W-30	1 l	12	D - GB - F - HR - RUS - GR	7
33019	megol Motorenoel Dynamik DX 1 SAE 5W-30	5 l	4	D - GB - F - HR - RUS - GR	7
33020	megol Motorenoel Dynamik DX 1 SAE 5W-30	20 l	1	D - GB	7
33021	megol Motorenoel Dynamik DX 1 SAE 5W-30	60 l	1	D - GB	7
33022	megol Motorenoel Dynamik DX 1 SAE 5W-30	200 l	1	D - GB	7
33023	Ersatzakku für Akkufett presse 18V	1 St.	1		53
33025	Meguin Diesel Smoke Stop Concentrate	250 ml	12	GB - D - F - RUS - ARAB	51
33026	megol Motorenoel Evolution LL IV SAE 0W-20	1 l	12	D - GB - F - HR - RUS - GR	4
33027	megol Motorenoel Evolution LL IV SAE 0W-20	60 l	1	D - GB	4
33028	megol Motorenoel Future LL 12FE SAE 0W-30	1 l	12	D - GB - F - HR - RUS - GR	5
33029	megol Motorenoel Future LL 12FE SAE 0W-30	60 l	1	D - GB	5
33030	megol Motorenoel New Engine FED SAE 0W-30	5 l	4	D - GB - F - HR - RUS - GR	5
33031	megol Motorenoel Low Ash Energy SAE 0W-30	1 l	12	D - NL - F - I - E	5
33032	megol Motorenoel Low Ash Energy SAE 0W-30	200 l	1	D - NL - F - I - E	5
33036	megol Doppelkupplungsgetriebe Fluid	IBC 1000 l	1	D - GB	17
33038	megol Motorenoel Fuel Eco 1 SAE 0W-30	1 l	12	D - GB - F - RUS - GR - ARAB	4
33039	megol Motorenoel Fuel Eco 1 SAE 0W-30	5 l	4	D - GB - F - RUS - GR - ARAB	4
33040	megol Motorenoel Dynamik DX 1 SAE 5W-30	4 l	4	D - GB - F - RUS - GR - ARAB	7
33043	megol Special Engine Oil SAE 0W-20	20 l	1	D - GB	4
33044	megol Special Engine Oil SAE 0W-20	200 l	1	D - GB	4
33047	megol Getriebeoel MTF GT1 75W	1 l	6	D - GB - F - HR - RUS - GR	18
33048	megol Getriebeoel MTF GT2 75W-80	1 l	6	D - GB - F - HR - RUS - GR	18
33049	megol Getriebeoel MTF GT3 70W-75W	1 l	6	D - GB - F - HR - RUS - GR	18
33050	megol Getriebeoel ATF G7	1 l	6	D - GB - F - HR - RUS - GR	17
33051	megol Getriebeoel ATF G9	1 l	6	D - GB - F - HR - RUS - GR	17
33052	Meguin Hydraulikoel HLP 46	1 l	12	D - GB	30
33053	megol Doppelkupplungsgetriebe Fluid	20 l	1	D - GB	17
33054	Meguin Sägekettenoel 100	1 l	6	D	36
33055	megol Special Engine Oil SAE 0W-16	1 l	12	D - GB - F - RUS - GR - ARAB	4
33056	megol Special Engine Oil SAE 0W-16	4 l	4	D - GB - F - RUS - GR - ARAB	4
33057	megol Special Engine Oil SAE 0W-16	5 l	4	D - GB - F - RUS - GR - ARAB	4
33058	megol Motorenoel Evolution LL IV SAE 0W-20	5 l	4	D - GB - F - HR - RUS - GR	4

TABLE OF CONTENTS, NUMERIC

Part-No.	Description	Cont.	P.U.	Language	Page
33059	megol Motorenoel Evolution LL IV SAE 0W-20	200 l	1	D – GB	4
50491	Brochure Passenger Cars GB		50		54
50492	Brochure Passenger Cars ARAB		DV		54
50493	Brochure Passenger Cars LV		DV		54
50494	Brochure Passenger Cars UA		DV		54
50495	Brochure Trucks GB		50		54
50496	Brochure Trucks ARAB		DV		54
50497	Brochure Trucks LV		DV		54
50498	Brochure Trucks RUS		50		54
50499	Brochure Trucks UA		DV		54
50535	Brochure Trucks F		50		54
50536	Brochure Greases GB		50		54
50537	Brochure Greases ARAB		50		54
50538	Brochure Greases LV		DV		54
50539	Brochure Greases UA		DV		54
50540	Brochure Greases F		50		54
50541	Brochure Passenger Cars F		50		54
50543	Brochure Passenger Cars E		DV		54
50544	Brochure Passenger Cars P		250		54
50545	Brochure Trucks E		DV		54
50546	Brochure Trucks P		DV		54
50547	Brochure Greases E		DV		54
50548	Brochure Greases P		DV		54
50550	Brochure Corrosion Protection Oils E/P		DV		54
50638	Brochure Greases I		50		54
50639	Brochure Passenger Cars I		50		54
50640	Brochure Trucks I		50		54
50797	Information on Meguin Radiator Cleaner GB		DV		55
51244	Meguin Beachflag upper part 400 x 100 cm		1		55
51245	Meguin Beachflag lower part		1		55
51686	Complete Catalogue GB		20		54
51728	Meguin innovations 2020 brochure D		50		55

General

IBC 1000 L: intermediate bulk container at 1000 liters, export/disposable container



**Engine Oils
Industrial lubricants
Greases
Gear Oils
Special products**



Meguin GmbH & Co. KG
Mineraloelwerke
Rodener Straße 25
66740 Saarlouis
GERMANY
Phone: +49 6831 8909-0
Fax: +49 6831 8909-59
E-Mail: export@meguin.de

516862009



www.meguin.de

With best regards: